
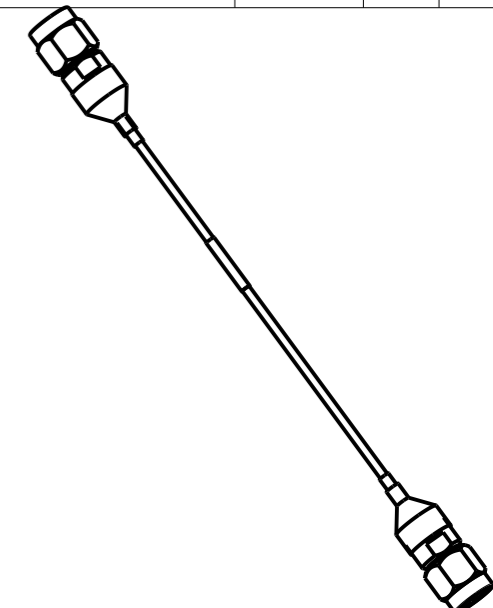


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL CREATED	30MAR2021	CL	WH

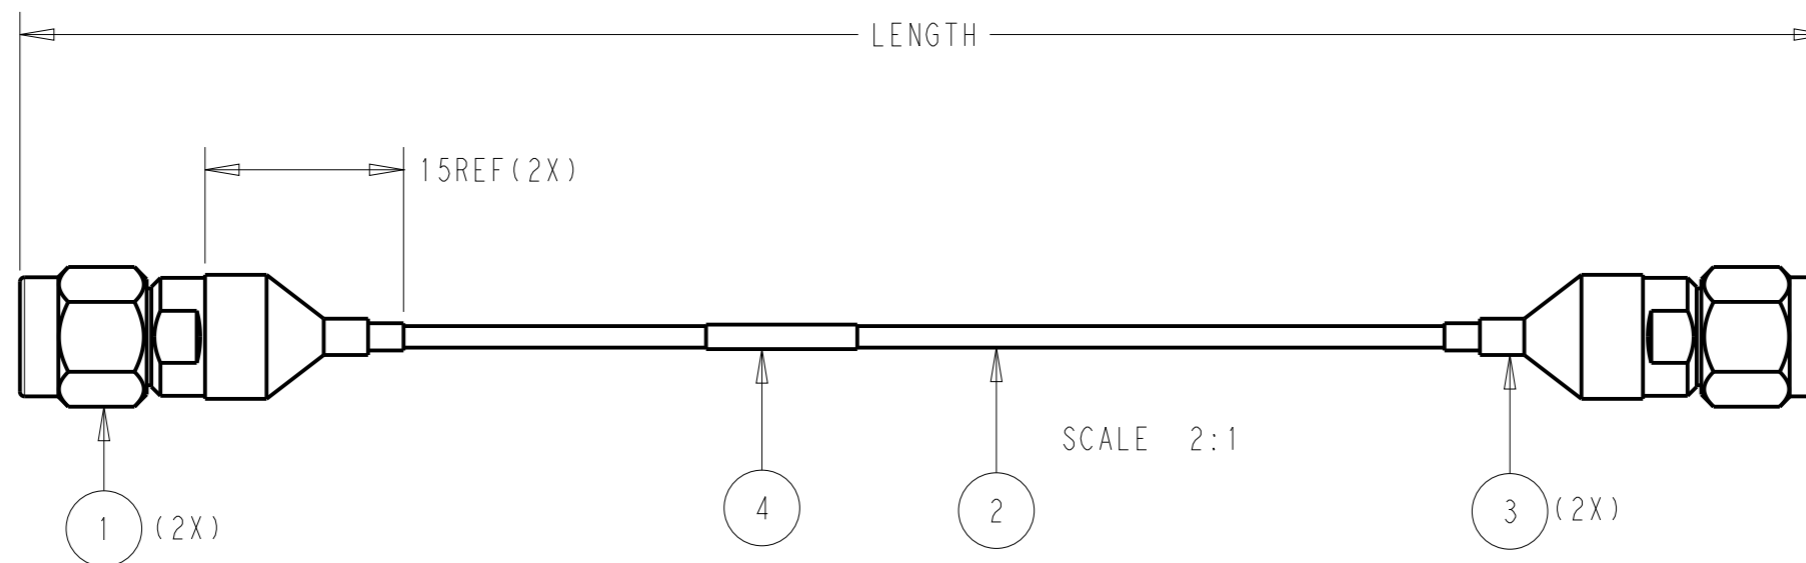

- NOTES:
- MATERIAL AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702
 - MATERIAL CHARACTERISTIC
 SMA CONN: INNER CONTACT: BeCu, 30MICRO-INCH MIN GOLD PLATING
 OUTER BODY: STAINLESS STEEL, PASSIVATION
 OTHER: BRASS
 CABLE: 0.047" FLEXIBLE CABLE, BLUE
 - PRODUCT RATING:
 TEMPERATURE: -45°C TO +125°C
 VOLTAGE: 500V (RMS)
 CHARACTERISTIC IMPEDANCE: 50 OHMS (NORMAL)
 FREQUENCY RANGE: DC TO 27GHz
 BEND RADIUS: 5MM MIN (REPEATED)
 - CABLE ASSEMBLY TO BE 100% SI TESTED
 VSWR: 1.25:1 MAX @ DC~27000MHz
 INSERT LOSS: $\{[0.033 * \text{SQRT}(f) + 0.000039 * f] * \text{LENGTH} + 0.015f / 1000\}$ dB (TYPICAL)
 LENGTH UNIT IS METER IN THE FORMULA. f IS FREQUENCY IN MHZ
 - CONNECTOR FOLLOW IEC 60169-15
 - CABLE ASSEMBLY CAN MEET MECHANICAL
 COUPLING TORQUE(NORMAL): 0.8~1.1N.M
 TENSILE STRENGTH OF COUPLING: 180N MIN
 CABLE PULLING: 50N MIN
 - LABEL WILL MARK PN, NAME, YEAR AND WEEK
 - CONNECTOR BE PROTECTED WITH CAP

PART NUMBER	LENGTH
2-2016753-0	2000±10
1-2016753-5	1500±10
1-2016753-0	1000±10
2016753-9	350±5
2016753-8	250±3
2016753-7	150±3
2016753-6	50±3
2016753-5	500±5
2016753-4	400±5
2016753-3	300±4
2016753-2	200±3
2016753-1	100±3

PC	Q'TY	DESCRIPTION	ITEM
1	1	LABEL	4
AR	1	HEAT SHRINK TUBE BLACK	3
AR	1	CABLE EPC-047, 27GHz, FLEX, BLUE	2
2	1	SMA PLUG, 27GHz, FOR EPC-047	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23DEC2020 Cedar Liu		
DIMENSIONS: mm		CHK 23DEC2020 Roger Song		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD - Wenke He	NAME EP-SMA, 27GHz STRAIGHT MALE-MALE WITH EPC-047 FLEXIBLE	
0 PLC ±-		PRODUCT SPEC -	SIZE A3	
1 PLC ±0.1		APPLICATION SPEC -	CAGE CODE 00779	DRAWING NO C-2016753
2 PLC ±0.01		WEIGHT -	RESTRICTED TO -	
3 PLC ±0.001		CUSTOMER DRAWING	SCALE 1:1	SHEET 1 OF 1
4 PLC ±0.0001				REV A
ANGLES ±-				
MATERIAL TBD	FINISH -			
	finish_spec_2			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#)
[24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-](#)
[50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [4814-BB-24](#)
[5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [MXHT83QE3000](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-](#)
[6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#)
[R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#) [PCX-18-50](#)