# 3SBH5004K1R <

### CII

TE Internal #: 4-1617076-4 1/5-Size Relays, 1/5-Size Relay Contact Arrangement 4 Form C, 4PDT, 4 C/O, 26.5VDC 1/5-Size Relay Input Voltage View on TE.com >



Relays, Contactors & Switches > Relays > Mil-Aero Relays > 1/5-Size Relays



1/5-Size Relay Contact Arrangement: 4 Form C, 4PDT, 4 C/O

1/5-Size Relay Input Voltage: 26.5 VDC

Coil Suppression Diode: Without

1/5-Size Relay Contact Current Rating: 2A

1/5-Size Relay Coil Voltage Rating: 26.5 VDC

### Features

#### **Product Type Features**

Enclosure TypeHermetically SealedRelay TypeMilitary/Aerospace High PerformanceCoil LatchingWithout

Product Type	Relay
MOSFET Driver	Without
Configuration Features	
Transistor Driver	Without
Electrical Characteristics	
Actuating System	DC
Vibration	30G's, 10–3000Hz
Coil Magnetic System	Non-Polarized, Monostable
Shock	100G's, 11ms
Coil Power Measurement	Milliwatts
Coil Polarity Protection Diode	Without
1/5-Size Relay Input Voltage	26.5 VDC
Coil Suppression Diode	Without
1/5-Size Relay Coil Voltage Rating	26.5 VDC
1/5-Size Relay Coil Resistance	720 Ω

### 3SBH5004K1R

1/5-Size Relays, 1/5-Size Relay Contact Arrangement 4 Form C, 4PDT, 4 C/O, 26.5 VDC 1/5-Size Relay Input Voltage



1/5-Size Relay Coil Power Rating (DC)	975 mW
Contact Features	
1/5-Size Relay Contact Arrangement	4 Form C, 4PDT, 4 C/O
1/5-Size Relay Contact Current Rating	2 A
Termination Features	
Termination Type	PC Pins
Mechanical Attachment	
1/5-Size Relay Mounting Type	Printed Circuit Board
Usage Conditions	
Operating Temperature Range	-65 – 125 °C
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021

Halogen Content

Solder Process Capability

(219)
Candidate List Declared Against: JAN 2021
(211)
SVHC > Threshold:
Not Yet Reviewed

Not Yet Reviewed for halogen content

Not lead free process capable

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

### 3SBH5004K1R


1/5-Size Relays, 1/5-Size Relay Contact Arrangement 4 Form C, 4PDT, 4 C/O, 26.5 VDC 1/5-Size Relay Input Voltage



## **Compatible Parts**



## Customers Also Bought

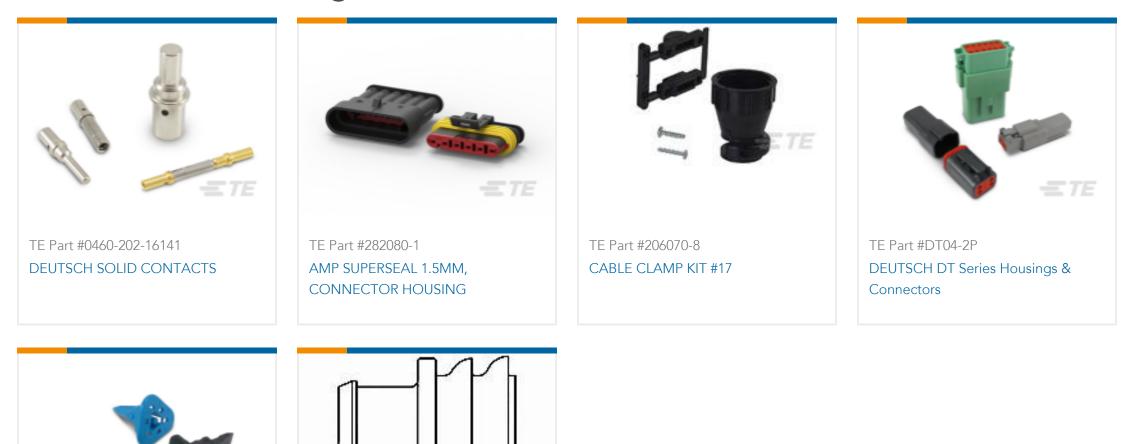



### Documents

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_4-1617076-4\_E.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_4-1617076-4\_E.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_4-1617076-4\_E.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### Datasheets & Catalog Pages

**C** For support call+1 800 522 6752

### 3SBH5004K1R

1/5-Size Relays, 1/5-Size Relay Contact Arrangement 4 Form C, 4PDT, 4 C/O, 26.5 VDC 1/5-Size Relay Input Voltage



5-1773450-5\_sec1\_3SBH

English

#### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Low Signal Relays - PCB category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

LZN4-US-DC12 LZNQ4-US-DC24 LZNQ4-US-DC48 6-1393813-4 6-1462039-0 6-1617347-5 6-1617353-3 6-1617529-6 617-12 M39016/20-054M M39016/27-030M 67RPCX-3 MAHC-5494 D3493L 7-1393809-0 7-1393813-3 741B8 7556072001 MF-11AM-24 MF1201N12 MF-17A-24 FBR244D012/02CP FBR244D024/02CS 80.010.4522.1 FL-4036 FLH-11D-6 831A7 MMS124 FTR-B4GA006Z FW1102S06 FW1201S39 FW1210S02 FW1521S01 FW5A1201S14 9-1393813-6 9-1617582-5 G6AK-2-H-DC5 G6E-184P-ST-US-DC48 G6G234CDC24 A07A939BZ1-0388 A150-0005 PZ-2A2420 HB1-DC6V HB1-DC9V R10-14A10-240 R10-14D10-12 R10-5A10-120F R10-E1L8-S200 R10-E2468-1 R10-E4Z2-V700