


SPECIFICATION CONTROL DRAWING

TITLE
 FOUR CONDUCTOR CABLE, UNSHIELDED, UNJACKETED, 600 VOLT
 Date 12-9-96
 Revision A

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

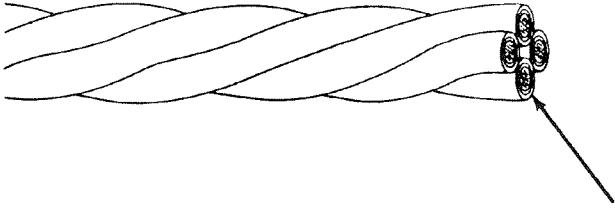

COMPONENT WIRES - 55PC0214

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	DIAMETER (in.)		WEIGHT (lbs/1000 ft.)	
		LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE
55PC0244-24*	24	.087	.102	.117	8.06
55PC0244-22*	22	.100	.117	.134	11.80
55PC0244-20*	20	.119	.139	.159	17.83
55PC0244-18*	18	.139	.163	.188	26.83
55PC0244-16*	16	.155	.182	.209	34.07

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 INSULATION FLAWS:
 Impulse Dielectric Test, 8.0 kV (peak)

PART NUMBER:
 The "*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors.
 Example: AWG 22, white, black, red and orange
 component wires: 55PC0244-22-9/0/2/3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[89182-010-1000](#) [6000FE-877-1000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [6502FE 8771000](#) [6541PA-008-U1000](#)
[CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [82841-877-5000](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#) [83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469 060100](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-500](#) [877541-000](#) [8780-060-1000](#) [88444-002-1000](#) [9159-060-500](#) [939870-000](#) [9423 060U500](#) [9444 060U1000](#) [9497 0001000](#) [9515-060-1000](#) [9520-060-1000](#) [9524-060-1000](#) [9546-060-500](#) [9572-002-U500](#) [9774-060-1000](#) [1213F-D15-A1000](#) [1213F-009-A1000](#)