
## SPECIFICATION CONTROL DRAWING

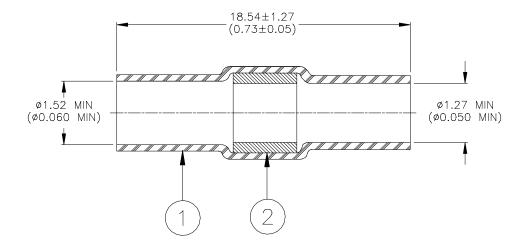

## **MATERIALS**

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyolefin.
- 2. SOLDER PREFORM WITH FLUX:

SOLDER: TYPE Sn63 per ANSI J-STD-006. FLUX: TYPE ROL1 per ANSI-J-STD-004.

## **APPLICATION**

- 1. This part is designed for splicing two tin plated solid conductors having a combined maximum diameter of 1.52 (0.060) and a minimum jacket diameter of 0.76 (0.030).
- 2. Part may be installed with infrared or convection heat sources.
- 3. Wires are to be stripped 10.16 (0.400) to 12.7 (0.500) and overlapped under the solder preform.

	<b>n Interest type ELECTR</b> onstitution D rk, CA 9402	ect Di	EVICES	SOLDERSLEEVE SOLID CONDUCTOR SPLICE, 1.52 (0.060) I.D.						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.						DOCUMENT NO.: <b>D-110-28</b>				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ROUGHNESS IN the		Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.			DCR NUMBER: D000142		REPLACES: n/a		
DRAWN BY: M. FORONDA		DATE:	22-Mar-00	PROD. REV.: F		DOC ISSUE:	SCALE: None	SIZE:	SHEET: 1 of 1	

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for TE Connectivity manufacturer:

Other Similar products are found below:

D38999/24FJ4AN 570416-000 CLTEQ-M81CE-SSRELAY-4-20V 4-1195131-0 650069-000 SMD100-2 358838-000 CB-1022B-78

RM707012 RP410012 MMS42 1-640426-8 2EDL4CM DTS20W19-11PD-3028-LC RM202615 NC6-P104-06 MSPS103B DTS26F2141HE-LC DTS26F21-41AE DTS26F21-41PE-LC DTS26F21-11SE-3028-LC 30DCB6 1932144-1 293545-4 LVR125S MS27466T25F4PB

CKB-38-78010 TR04AI-TINELLOCKRING 1206SFF150F/63-2 D38999/20JB35HA TE1500A2R2J D38999/20WC8BB DTS24F19-11SC3028-LC D38999/24WG11HA D38999/24WG11HN MS27467T21F11H DJT16E21-11HA MS27467T21F35J MS27467T21F11J

MS27467T21F16H-LC MS27467T21F35H MS27467T21F41H-LC 1206SFH150F/24-2 RP330024 DJT16E21-11PA-LC DJT16E21-11HA
LC DJT16E21-11AA MS27467T21B11JA DJT16E21-11JA MS27467T21B11JA-LC