

TEL:0769-82001899

环保物料

Technical Data

Material:  
 Pin(outer sleeve):Brass,machined CuZn38Pb2  
 Plating(outer sleeve):  
 Tin Plated:2µm/80µm"Ni,5µm/200µ"Sn  
 Gold Plated:2µm/80µm"Ni,0.8µ"gold  
 Plating(Contact):2µm/80µ"Ni,gold or Tin plated  
 Insulator:PPS UL94V-0  
 Clip(Contact 4 Finger):Beryllium copper,heat treated  
 Mating pin□:0.40mm/0.66mm

Electrical:

Current rating:3amps/contact max.  
 Contact resistance:≤4mΩ/contact  
 Insulation resistance:≥1000MΩ at V=100V  
 Dielectric Withstanding Voltage:1000V AV Min  
 Operating voltage:60VAC/DC

Mechanical:

-Insertion:0.7N typ  
 -Withdrawal:0.4N typ  
 Mechanical life:min 500 cycle  
 Operating temperature:-40° C to+105° C  
 Soldering temperature:+255° C





MF200V-12-XX-0740

Pin位数

1=单排 2=双排

1=单塑 2=双塑

V=直插 R=弯插 VS=立式贴片 RS=卧式贴片

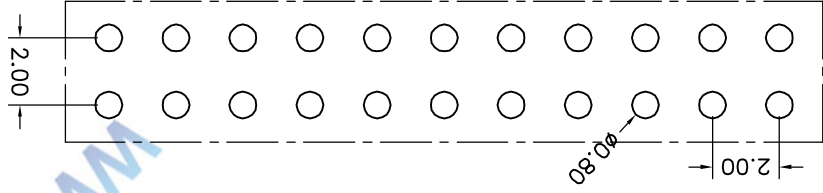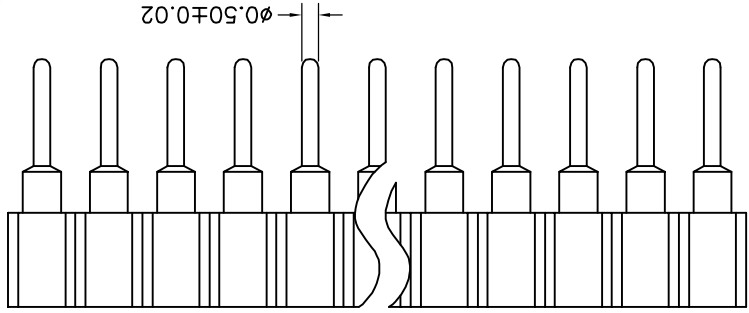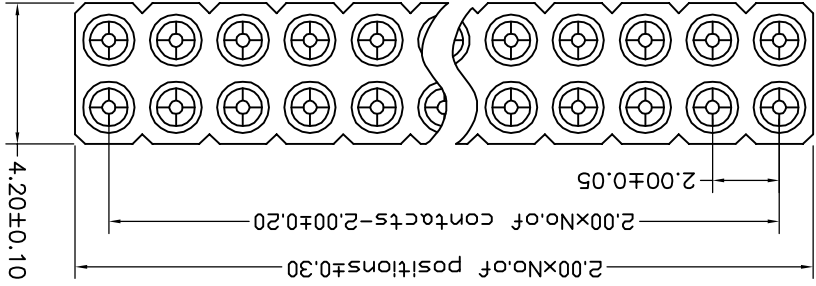

P. C. B LAYOUT

A0	VER	MODIFICATION	DRAW	DATE	.XXX ±0.03	.XXX° ±0.5°	VIEW	Φ	PART. NO.	MF200V-12-xx-0740	DWG NO.	009
					.XX ±0.08	.XX° ±1°	APPD		PRODUCT NAME	2.00mm Machined Female Header	SCALE	1:1
					.X ±0.20	.X° ±2°	CHKD		CONNECTORS XFCN CONNECTORS CO., LTD.	XFCN兴飞连接器有限公司	UNITS	mm
					X. ±0.30	X° ±5°	DRAWN	CK tan	TOLERANCE UNLESS OTHERWISE		DATE	2010.4.12
										SHEET	1/1	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XFCN](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)