

(2,00 mm) .0787"

ESQT (-368), PTHF SERIES

PC/104-PLUS™ SELF-NESTING SOCKETS

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?ESQT or www.samtec.com?PTHF

Insulator Material:

Black Liquid Crystal Polymer (ESQT)
Black High Temp Nylon (PTHF)

Contact Material:

Phosphor Bronze

Plating:

Au or Sn over 50µ" (1,27 µm) Ni

Operating Temp Range:

-55°C to +125°C

Contact Resistance:

10 mΩ

Insertion Depth:

(2,62 mm) .103" to (5,03 mm) .198"

Insertion Force:

(Single contact only) 4 oz (1,11 N) average

Normal Force:

60 grams (0,59 N) average

Withdrawal Force:

(Single contact only) 3 oz (0,83 N) average

Max Cycles:

100 with 10µ" (0,25 µm) Au



RoHS Compliant:

Yes

Lead-Free Solderable:

Yes (ESQT)

Mates with:
ESQT, PTHF

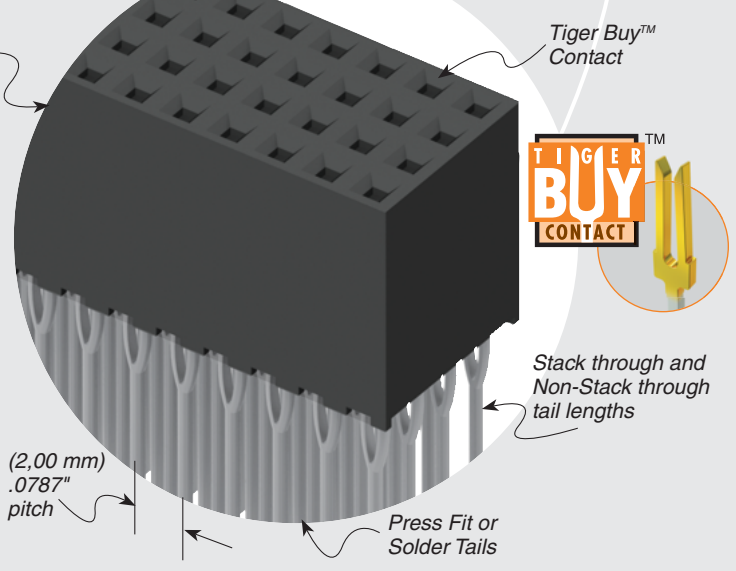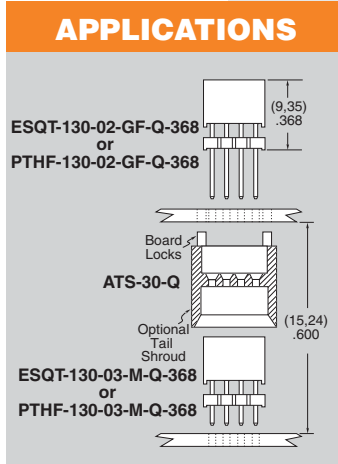

TYPE STRIP	1	NO. PINS PER ROW	30	LEAD STYLE	PLATING OPTION	Q	368
ESQT = Solder Tails				Specify LEAD STYLE from chart	-GF = 15µ" (0,38 µm) Gold on contact, Gold flash on tail (-02 Lead Style only)		
PTHF = Press Fit Tails					-M = 20µ" (0,51 µm) Gold on contact, Matte Tin on tail (-03 Lead Style only)		

LEAD STYLE	ESQT		PTHF	
	A	B	A	B
-02	(21,59) .850	(12,24) .482	(21,59) .850	(12,24) .482
-03	(11,63) .458	(2,29) .090	(12,34) .486	(3,00) .118

RECOGNITIONS


For complete scope of recognitions see www.samtec.com/quality



TOOLING

- Press fit tooling Contact Samtec.

OTHER SOLUTIONS




Paste In Hole (PIH) processing. Contact Samtec ASP Group. (Not recommended for stack through applications) ESQT only.

Note: Some lengths, styles and options are non-standard, non-returnable.

ALSO AVAILABLE (MOQ Required)

- Other platings Contact Samtec.

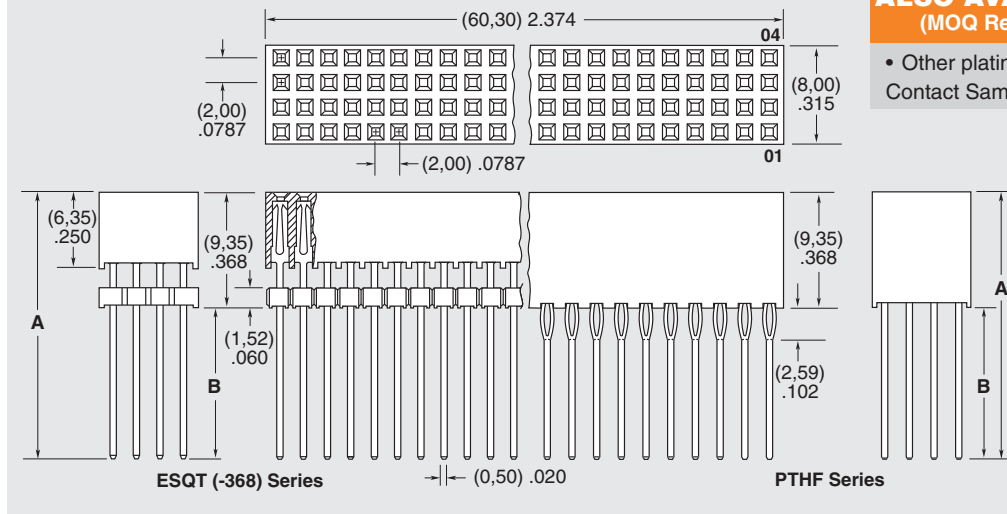

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)