


2 x 4" 40W to 60W AC-DC Power Supplies

Features

- ◆ Single Outputs
- ◆ Wide Range AC Input
- ◆ Low profile, Industry Standard Footprint
- ◆ Global Safety Agency Compliance
- ◆ EN61000-4 Immunity
- ◆ Up to 88% efficiency

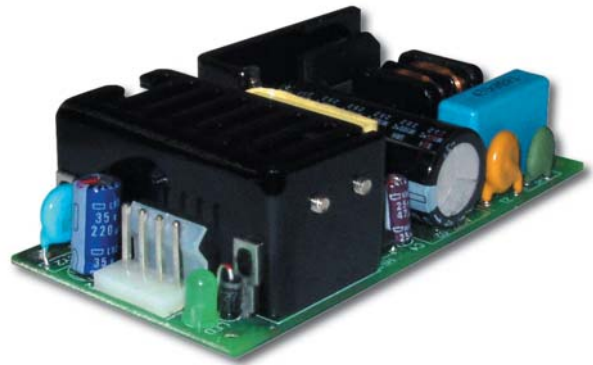

Key Market Segments & Applications



Specifications			
Model		ZPS40	ZPS60
Input Voltage range	-	90 - 264VAC (47 - 440Hz) or 120 - 370VDC	
Inrush Current (132/265VAC)	A	25 / 50 (cold start)	
Input Current (115/230VAC)	A	1.6 / 1.0	
Temperature Coefficient	-	±0.05%/°C	
Voltage Accuracy	%	±1%	
Minimum Load	A	None	
Load Regulation	%	±1%	
Line Regulation	%	±0.5%	
Ripple & Noise (1)	mV	1% or 50mV whichever is greater	
Short Circuit Protection	-	Continuous - hiccup mode	
Oversoltage Protection	V	Typically 110-130% of nominal	
Hold Up Time (Typ)	ms	8ms at 115VAC input	
LED Indicator	-	Green LED = OK	
Operating Temperature (2)	-	0 to +70°C, derate linearly to 50% load from 50°C to 70°C	
Storage Temperature	-	-20 to +85°C	
Humidity (non condensing)	-	10 - 95% RH	
Cooling	-	Convection	
Withstand Voltage		Input to Ground 1.5kVAC, Input to Output 3kVAC, Output to Ground 500VAC for 1 min.	
Isolation Resistance		>100M at 25C & 70%RH, Output to Ground 500VDC	
Vibration (non operating)		23.52m/s ² (10 - 55Hz: constant sweep 1 min X, Y, Z for 1 hour)	
Shock	-	< 196.1 m/s ² (20G)	
Safety Agency Approvals	-	UL60950, CSA60950, EN60950, CE Mark (LVD)	
Conducted & Radiated EMI	-	EN55022-B, FCC Class B	
Immunity	-	EN61000-4-2,-3,-4,-5,-6,-8	
Weight (Typ)	g (oz)	170g (6oz)	
Size (WxLxH)	in	2 x 4 x 1.2 (including underside components)	
Warranty	yrs	Two Year	

Notes:

(1) Measured with 0.1uF ceramic & 10uF electrolytic at 20MHz BW

(2) ZPS40 (3.3V to 9V models), ZPS60 (3.3V to 12V models) derate linearly to 25% load from 40°C to 70°C

2 Output Module Codes


Model	O/P(V)	Max. O/P(A)	Peak (A)(3)	Output Pwr(W)	Eff. (%)	
Single Output						
ZPS40-3R3	V1	3.3	6.0	7.2	20.0	74
ZPS60-3R3	V1	3.3	8.0	8.5	26.0	74
ZPS40-5	V1	5.0	6.0	7.2	30.0	78
ZPS60-5	V1	5.0	8.0	9.0	40.0	78
ZPS40-9	V1	9.0	4.45	5.34	40.0	82
ZPS60-9	V1	9.0	6.67	8.0	60.0	82
ZPS40-12	V1	12.0	3.34	4.0	40.0	84
ZPS60-12	V1	12.0	5.0	6.0	60.0	84
ZPS40-15	V1	15.0	2.67	3.2	40.0	85
ZPS60-15	V1	15.0	4.0	4.8	60.0	85
ZPS40-24	V1	24.0	1.67	2.0	40.0	86
ZPS60-24	V1	24.0	2.5	3.0	60.0	86
ZPS40-30	V1	30.0	1.33	1.6	40.0	86
ZPS60-30	V1	30.0	2.0	2.4	60.0	86
ZPS40-36	V1	36.0	1.11	1.33	40.0	87
ZPS60-36	V1	36.0	1.67	2.0	60.0	87
ZPS40-48	V1	48.0	0.834	1.0	40.0	88
ZPS60-48	V1	48.0	1.25	1.5	60.0	88

Note: (3) Average not to exceed max power, <30s, 10% duty cycle

Other Industrial Products

SC40/60	40 to 80W, 3x5", 1 - 3 outputs
NV175	175W, 3x5", 1-5 outputs
ZWS	5 to 240W, single output

ZPS Outline Drawing

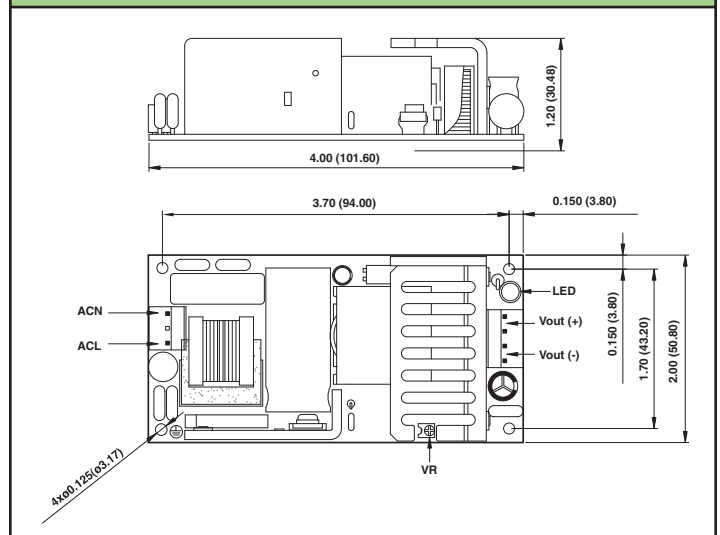

For Additional Information, please visit us.tdk-lambda.com/lp/products/zp-series.htm



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [tdk](#) manufacturer:

Other Similar products are found below :

[VLF5012ST-1R0N2R5](#) [SWS1000L-24/BL](#) [CXA-2115](#) [MCZ1210AH301L2T](#) [78P7200-IH/F](#) [MLP2012S1R5TT](#) [ACH3218-682-TD01](#)
[ACT45B-KIT](#) [NL565050T-822J-PF](#) [C1005JB1H471K050BA](#) [C1608CH1H151J080AA](#) [C2012JB1H105K125AB](#) [C4532NP01H154J250KA](#)
[SD1209T5-A1](#) [SLF12565T-152MR37-H](#) [CD75-B2GA331KYGKA](#) [CLF10040T-221M](#) [CLF12555T-220M](#) [R22095*REPAIRED](#)
[MLF1005LR12K](#) [MLP2520S1R5MT](#) [C0603C0G1E330J030BA](#) [VLS252015T-3R3M1R0](#) [VLS4012T-150MR65](#) [ZCAT-KIT](#) [MPZ2012-KIT](#)
[NLV32T-R27J-EFD](#) [CGA3EANP02A682J080AC](#) [CKCM25C0G2A101K060AK](#) [CLF10040T-4R7N](#) [WTM505090-10K2-5V-G1](#)
[VLS252010HBX-R24M-1](#) [CGJ2B2X7R1C222K](#) [CGA9M1X7T2J334K](#) [CGA8P3X7T2E105M/SOFT](#) [CGA6J4C0G2J392J](#)
[CGA6M3X7R2E154K](#) [CGA3E3C0G2E181J](#) [CGA2B2C0G1H331J](#) [C-WPTX01-E6-KIT](#) [CEU-AC01-E6-KIT](#) [CERB3UX5R0G105M](#)
[RLF12545T-100M5R1-PF](#) [PFE500F28/T](#) [CCT406393-600-36-02](#) [PFC3819QM-181K09B-00](#) [VLF3010AT-100MR49](#) [MMZ0603D330C](#)
[MPZ2012S102ATD25](#) [MLG0603P-2-KIT](#)