


© MPE-GARRY


Standard pin headers 2,54 mm pitch and 0,64 mm square pins. Different plating options and different insulators as standard. Any pin length available on request. Customized connectors are possible for smaller quantities as well.

| | |
|-------------------------|---|
| Pitch (mm) | 2,54 |
| Mating contact size | sq. 0,64 |
| No of contacts | 50 |
| Polarising | No |
| Locking | No |
| Material contact | Copper alloy |
| Plating contact | Au |
| Material insulator | High temp. thermoplast UL94V-0 |
| Rated current | 3,0 A |
| Rated voltage | 250 V _{RMS} / V _{DC} Please consider air- and creepage distances |
| Withstand voltage | 500 V _{RMS} for 1 minute |
| Operating temperature | -40°C to +105°C |
| Max. processing temper. | 260°C for 10 seconds |
| Packaging | Standard |
| A (Length) | 12,60 |
| B (Mating) | 6,80 |
| C (PCB side) | 3,30 |
| L | 2,50 |

Single row pinheader.

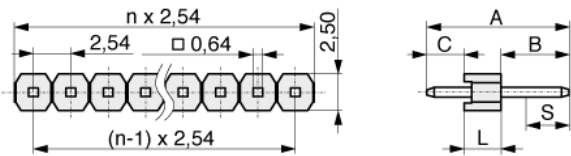

Footprint



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [MPE Garry](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)