

Data Sheet

Type Number:	55750	
Sytem:	Nickel Metal Hydride/ KOH Electrolyte	
Nominal Voltage [V]:	1.2	
Nominal Capacity C [mAh]:	500	
Typical Capacity C [mAh]:	510	
	at 100 mA / 1.00 V	
Weight, approx. [g]	14.0	
Dimensions [mm]:	min.	max.
Length [l]:	24.0	24.2
Width Facing [w]:	33.9	34.1
Height [h]:	6.3	6.5

UL Recognition:	MH13654	
Coding:	Manufacturing 5 digit code (123 = day/4 = year/ 5 = version)	

Temperature Ranges [°C]	min.	max.
Storage: less than 30 days	-40	85
Discharge:	-20	85
Charge:	0	85

Charging Method:	
Normal Charging:	50 mA for 14 – 16 h
Accelerated Charging (20°C):	150 mA for 4 h
	Time controlled, voltage control recommended
Fast Charging (20°C):	500 mA for h *
Trickle Charging:	5 - 15 mA

Overcharge (20°C):	15 mA continuous
	50 mA up to 1 year

Charge Retention [%] at 20°C:	80
	Capacity available after 1 month Storage at 20°C


Internal Resistance [Ohm]:	0.1
	at charged cells, 20°C, DC: 0.2 CA/2 CA, (IEC 61951-2)

Impedance [Ohm]:	0.015
	at charged cells, 20°C, AC: 1kHz, (IEC 61951-2)

Typical Capacities [mAh]:	
at 500 mA / 0.9 V	400
at 1500 mA / 0.9 V	200

Max. Discharge Current (cont.) [mA]:	1500
---	------

Life Expectancy (typical):	
IEC Cycle:	1000 Cycles (IEC 61951-2)
Trickle Charge:	up to 5 years (20°C)
Trickle Charge:	up to 3 years (45°C)

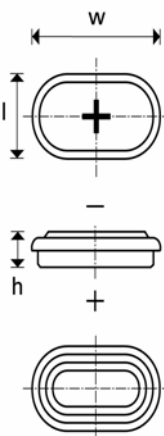

* (-dv = 5-10 mv/ cell; dT/dt=0.7°C/min)

Capacities based on normal charging

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Battery Packs](#) category:

Click to view products by [Varta](#) manufacturer:

Other Similar products are found below :

[2280309-1](#) [R101-B](#) [4114 210 501](#) [4120 210 501](#) [4600 726 406](#) [4610 726 406](#) [312G-U1](#) [55615703012](#) [3LR12](#) [4103 210 392](#) [4103 210 394](#)
[4106 210 392](#) [4106 210 394](#) [4223 210 501](#) [4606 726 406](#) [4607 726 406](#) [ZA13](#) [LR03/AAA/MN2400\(K4\)](#) [LR03 MAXELL S4](#) [LR1130](#)
[MAXELL B10](#) [LR14-MN1400-C K2](#) [LR1/910A](#) [LR41 MAXELL B10](#) [LR43](#) [LR43 MAXELL B10](#) [LR6 MAXELL S4](#) [11012](#) [E23A](#) [E90](#)
[625302](#) [625304](#) [637871](#) [638006](#) [6LF22/9V/MN1604\(K1\)C&B](#) [6LF22/9V/MN1604 PLUS](#) [6LR61](#) [SR626SW MAXELL](#) [SR920SW](#)
[MAXELL](#) [7K67 J](#) [55615303059](#) [GP14A S2](#) [GP15E](#) [GP1604GLF-2UE1](#) [GP 1604 ULTRA PLUS](#) [23733](#) [10 ET](#) [675 ET](#) [11A B5](#) [A544](#) [A76-](#)
[U10](#)