


# LAN Cable

Category 7e

**HELUKAT® 600**

S-STP



## Cable structure

Inner conductor diameter:  
Conductor material:  
Core insulation:  
Core colours:  
Shielding 1:  
Screen over stranding element:  
Screen 1 over stranding:  
Screen 2 over stranding:  
Outer sheath material:  
Outer diameter:  
Outer sheath colour:

## S-STP 4x2xAWG 23/1 FRNC

0,57 mm  
Copper, bare  
Foam-skin-PE  
wh/bu, wh/og, wh/gn, wh/bn  
-  
Polyester foil, aluminium-lined  
Cu braid  
-  
FRNC  
approx. 7,5 mm  
Blue Lilac similar to RAL 4005

## Electrical data

Characteristic impedance:

100 Ohm ± 15 ohm at 1 to 100 MHz  
100 Ohm ± 20 ohm at 101 to 1000 MHz  
130 Ohm/km max.


Loop resistance:

43 nF/km nom.

Mutual capacitance:

Rel. propagation velocity:

79 %

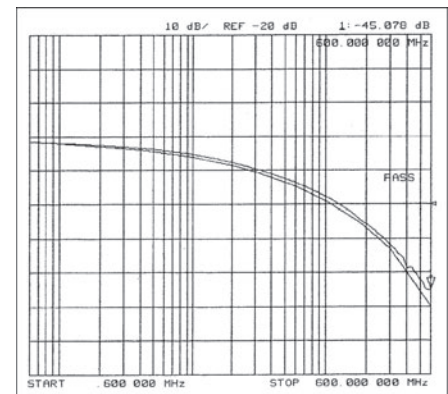


## Typical values

Frequency (MHz)	10	16	62,5	100	200	300	600	900	1000
Attenuation (dB/100m)	5,6	7,1	13,9	17,5	25,2	32,1	44,9	55,0	58,0
Next (db)	100,0	100,0	96,0	94,0	88,0	84,0	73,0	71,0	69,0
ACR (db)	94,4	92,9	82,1	76,5	62,8	51,9	28,1	16,0	9,0

## Technical data

Weight: approx. 60 kg/km  
Min. bending radius for laying: 60 mm  
Operating temperature range min.: -20°C  
Operating temperature range max.: +60°C  
Caloric load, approx. value: 0,60 MJ/m  
Copper weight: 30,00 kg/km

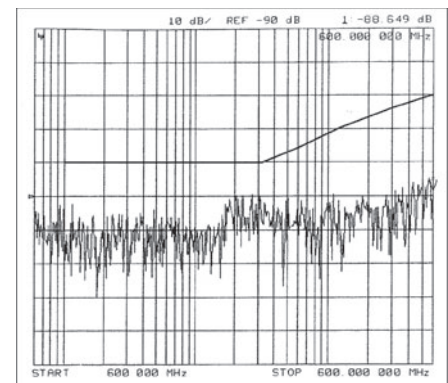

## Norms

Acc. to ISO/IEC 11801, Acc. to EN 50173, Acc. to EIA/TIA 568-A, Category 7e,  
Flame-retardant acc. to IEC 60332-3, Smoke density acc. to IEC 61034, Halogen-free acc. to 60754-2, Corrosiveness acc. to EN50267-2-3

## Application

HELUKAT®600 data cables are used in the tertiary, but also in the secondary level of a network. They are characterized by large performance reserves and outstanding performance. They can be used to implement services such as Gigabit Ethernet, Fast Ethernet, Ethernet, ATM155, FDDI, token ring 4/16 Mbit/s or ISDN absolutely trouble-free. Likewise, the mechanical characteristics are perfectly suited for the application in tight cable channels and platforms due to their optimized construction.

## Part no.

**80810**, S-STP 4x2xAWG 23/1 FRNC (S/FTP)

Dimensions and specifications may be changed without prior notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ethernet Cables / Networking Cables](#) category:*

*Click to view products by [Helukabel](#) manufacturer:*

Other Similar products are found below :

[0152660053](#) [603020002](#) [73-7797-25](#) [73-8890-10](#) [73-8890-14](#) [73-8891-14](#) [73-8891-25](#) [73-8892-50](#) [73-8894-10](#) [73-8894-3](#) [73-8895-14](#) [73-8896-7](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [9QA0-111-12-3.00](#) [1200650742](#) [1200700174](#) [1200860368](#) [1200650013](#) [1201080008](#) [1-21919-1](#) [1300500373](#) [1300101844](#) [1300101845](#) [130050-0004](#) [1300500014](#) [1410147](#) [E16A06002M030](#) [E200102-009-S1](#) [MT14-187L](#) [17-103530](#) [NK5EPC18RDY](#) [NK5EPC18VLY](#) [NK5EPC18YLY](#) [NK5EPC1GRY](#) [NK5EPC30BLY](#) [NK5EPC30VLY](#) [NK5EPC30YLY](#) [NK5EPC4Y](#) [NK5EPC6YLY](#) [NK5EPC8BLY](#) [NK5EPC9YLY](#) [NK6PC30BUY](#) [NK6PC30GRY](#) [NK6PC30RDY](#) [NK6PC30Y](#) [NK6PC30YLY](#) [1969343-6](#) [C501100010](#) [C501106002](#)