


## W-Series WDK 2.5/TR-DU/ø TNHE

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

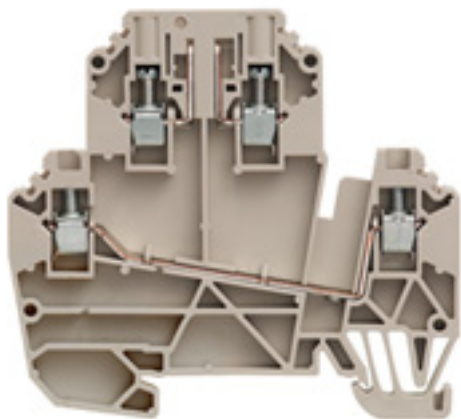

The new space-saving WDK 2.5 DU PE TR series enables you to wire up signal circuits using only one terminal block. The signal can be fed through the upper level of the terminal block so that the lower connection level still has room for the neutral conductor. The accompanying shield connection can save space by connecting to the integrated PE connection. This means that additional PE terminal blocks or other connection mechanisms in the electrical cabinet are no longer required. Depending on the type of signal and requirement, the upper connection level can be fitted with a disconnect lever or pluggable SIHA safety lever. The WDK 2.5 DU PE TR – with a width of only 5.1 mm – currently offers the highest wiring density of all screw terminal blocks for signal routing, and it does this without compromising on versatility or functionality.

### General ordering data

Type	WDK 2.5/TR-DU/ø TNHE
Order No.	<a href="#">183360000</a>
Version	W-Series, Test-disconnect terminal, Rated cross-section: 2.5 mm <sup>2</sup> , Screw connection
GTIN (EAN)	4032248996926
Qty.	50 pc(s).

**W-Series**  
**WDK 2.5/TR-DU/ø TNHE**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Dimensions and weights**

Length	72.5 mm	Width	5.1 mm
Height	66 mm	Height of lowest version	67 mm
Net weight	16 g		

**Temperatures**

Operating temperature		Storage temperature	
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

**Additional technical data**

Explosion-tested version	No	Open sides	right
Type of mounting	Snap-on	Version	Screw connection, One end without connector

**CSA ratings data**

Certificate No. (CSA)	200039-1057876	Voltage size C (CSA)	300 V
Current size C (CSA)	20 A	Wire cross section max. (CSA)	12 AWG
Wire cross section min. (CSA)	30 AWG		

**Clampable wires (rated connection)**

Type of connection	Screw connection	Blade size	0.6 x 3.5 mm
Connection direction	on side	Number of connections	4
Clamping range, rated connection, min.	0.5 mm <sup>2</sup>	Clamping range, rated connection, max.	4 mm <sup>2</sup>
Clamping screw	M 3	Tightening torque, min.	0.5 Nm
Tightening torque, max.	0.6 Nm	Gauge to IEC 60947-1	A2
Wire connection cross section, solid core, max. rated connection	0.5 mm <sup>2</sup>	Wire connection cross section, solid core max. rated connection	4 mm <sup>2</sup>
Wire connection cross section, stranded, rated connection, min.	1.5 mm <sup>2</sup>	Wire connection cross section, stranded, rated connection, max.	4 mm <sup>2</sup>
Wire connection cross section, finely stranded, max.	4 mm <sup>2</sup>	Wire connection cross-section, finely stranded, min.	0.5 mm <sup>2</sup>
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm <sup>2</sup>	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	2.5 mm <sup>2</sup>
Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	0.5 mm <sup>2</sup>	Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	2.5 mm <sup>2</sup>

**Disconnect terminals**

Tightening torque, max.	0.6 Nm	Tightening torque, min.	0.5 Nm
-------------------------	--------	-------------------------	--------

**Rated data**

Rated cross-section	2.5 mm <sup>2</sup>	Rated voltage	690 V
Rated impulse withstand voltage	8 kV	Rated current	24 A
Pollution severity	3		

**W-Series**  
**WDK 2.5/TR-DU/ø TNHE****Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com**Technical data****UL ratings data**

Certificate No. (UR)	E60693VOL1SEC68	Voltage size C (UR)	300 V
Current size C (UR)	20 A	Conductor size Factory wiring max. (UR)	12 AWG
Conductor size Factory wiring min. (UR)	30 AWG	Conductor size Field wiring max. (UR)	12 AWG

**Material data**

Material	Wemid	Colour	Dark Beige
UL 94 flammability rating	V-0		

**System specifications**

Product family	W-Series	Type of connection	Screw connection
Connection direction	on side	Number of levels	2
Number of connections	4	No. of clamping points per level	2
Levels cross-connected internally	No	Mounting rail	TS 35
End cover plate required	Yes		

**Classifications**

eClass 6.2	27-14-11-20	eClass 7.1	27-14-11-20
------------	-------------	------------	-------------

**Approvals**

Approvals



ROHS

Conform

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [weidmuller](#) manufacturer:*

Other Similar products are found below :

[56956](#) [0133660000](#) [68676](#) [69718](#) [EXO24CH](#) [7940000218](#) [8005181001](#) [8008180000](#) [8432240000](#) [8463580000](#) [8545830000](#) [8689870000](#)  
[8705640000](#) [9001080000](#) [9003720000](#) [9004250000](#) [9004780000](#) [9013260000](#) [9014100000](#) [9019040000](#) [9026010000](#) [9028630000](#) [903708](#)  
[9037350000](#) [9046290000](#) [9129643500](#) [913155](#) [919656](#) [919764](#) [9202230000](#) [9202850000](#) [9204260000](#) [9456750000](#) [9457913000](#) [980811](#)  
[980826](#) [9912800003](#) [9916080000](#) [9916280012](#) [9918380000](#) [9919371224](#) [9925710000](#) [9926252005](#) [9927480024](#) [1166660000](#) [11751](#)  
[1222550000](#) [ACT20X-2HDI-2SDO-RNC-S](#) [ACT20X-HUI-SAO-S](#) [ACT20X-SAI-HAO-S](#)