
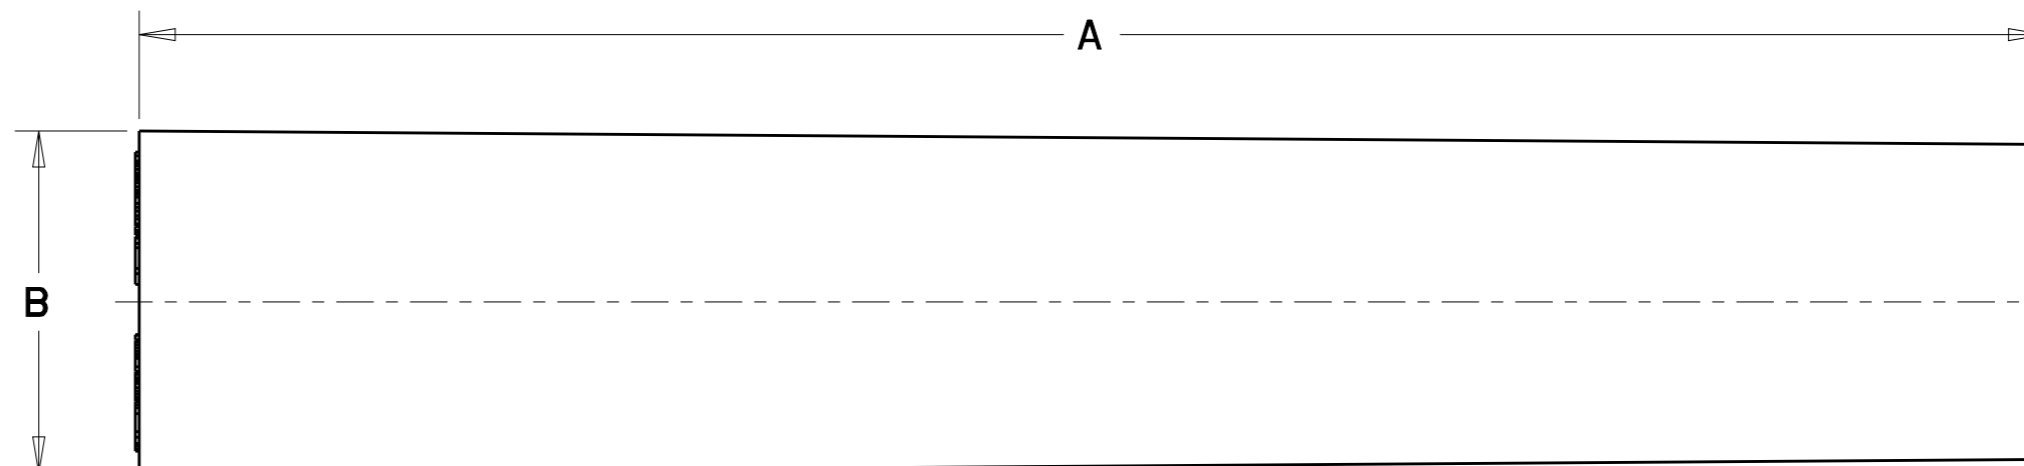


THIS DRAWING IS UNPUBLISHED  
RELEASED FOR PUBLICATION 2016  
© COPYRIGHT 1976 BY TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REDRAWN-REVISED PER E.O. P15306	12JUN1997	DM	AY
	F	REVISED PER E.O. P20435	22FEB2010	JA	RDR
	G	REVISED PER E.O. P20841	09MAR2011	JA	RDR
	H	REVISED PER ECO-16-007298	12MAY2016	JA	DM

PART NUMBER	A ±.100	B MAX
JS-16-00	2.465 [62.61]	.385 [9.78]
JS-12-00	2.500 [63.50]	.500 [12.70]
JS-04-00	3.437 [87.30]	.765 [19.43]

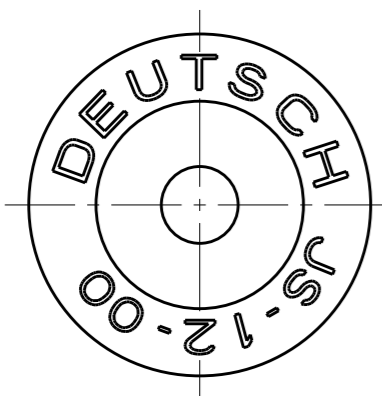

TE INTERNAL PN	DEUTSCH PN
JS-16-00	JS-16-00
JS-12-00	JS-12-00

CONTACT SIZE	MIN. INSUL. O.D. [mm]	MAX. INSUL. O.D. [mm]	WIRE RANGE [mm <sup>2</sup> ] REF ONLY
16	.100 [2.54]	.134 [3.40]	14-20 AWG [2.0-0.5]
12	.134 [3.40]	.170 [4.32]	12-14 AWG [3.0-2.0]
4	.280 [7.11]	.292 [7.42]	6 AWG [13.0]

SEE DTHD04-1-4P AND DTHD06-1-4S FOR REPLACEMENT

- 3 MATERIAL - VMQ (RED-ORANGE)
- 2 FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS, SEE ENVELOPE DRAWING 0425-015-0000.

1. JS-12-00 SHOWN FOR REFERENCE ONLY.

NOTES: UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. QUESADES 28AAPR1997	TE Connectivity	
DIMENSIONS: in [mm]		CHK D. MEYER 09MAR2011		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. REED 09MAR2011	NAME JIFFY SPLICE SIZES 16, 12, AND 4 ENVIRONMENTAL	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.025 [0.64] 4 PLC ± ANGLES ±0° 30' 0"		PRODUCT SPEC -	RESTRICTED TO -	
MATERIAL		APPLICATION SPEC -	SIZE A3	CAGE CODE 4AFU8
FINISH		WEIGHT -	DRAWING NO JS-XX-XX	
3		CUSTOMER DRAWING		SCALE 4:1
		SHEET 1 OF 1		REV H