


# PCB TERMINAL BLOCKS

## 3.81mm Pitch Pluggable Rising Clamp Terminal


- 2-20 pole solid block
- Pluggable male-female connectors
- Closed headers
- Horizontal & vertical female plug styles
- Polarised mouldings
- Moulded in green UL94-V0 flame retardant PA
- Professional rising clamp terminals
- 0.2-10mm<sup>2</sup> (30-16AWG) solid & stranded cable
- Anti solder wicking
- Captive screws
- Guided pin alignment
-  approved

### SPECIFICATION

Rating	10A/200V UL=8A/300V, VDE&IMQ=10A/200V
Dielectric strength	≥1.25kV
Impulse withstand voltage	2.5kV
Working temperature	110°C
Moulding	UL94-V0 flame retardant PA
Pin/terminal	Tinned phosphor bronze
Rising clamp	Nickel copper flash brass
Screw/torque	M2 steel zinc plated, 0.3Nm
Recommended PCB hole size	ø1.2mm


### Female connector

TYPE NO.	POLES	LENGTH	TYPE NO.	POLES	LENGTH
CTB92HE/2	2	8.4mm	CTB92HE/12	12	46.5mm
CTB92HE/3	3	12.2mm	CTB92HE/13	13	50.3mm
CTB92HE/4	4	16mm	CTB92HE/14	14	54.1mm
CTB92HE/5	5	19.8mm	CTB92HE/15	15	57.9mm
CTB92HE/6	6	23.7mm	CTB92HE/16	16	61.8mm
CTB92HE/7	7	27.5mm	CTB92HE/17	17	65.6mm
CTB92HE/8	8	31.3mm	CTB92HE/18	18	69.4mm
CTB92HE/9	9	35.1mm	CTB92HE/19	19	73.3mm
CTB92HE/10	10	38.9mm	CTB92HE/20	20	77mm
CTB92HE/11	11	42.7mm			

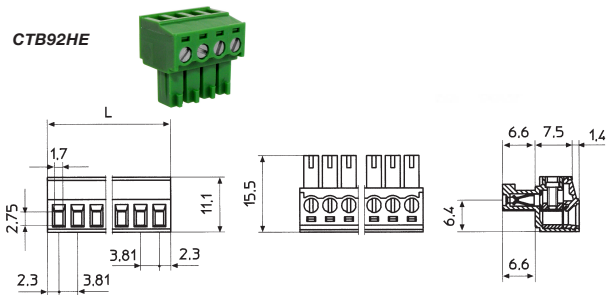


### Female connector vertical (standard)

TYPE NO.	POLES	LENGTH	TYPE NO.	POLES	LENGTH
CTB92VE/2S	2	8.4mm	CTB92VE/12S	12	46.5mm
CTB92VE/3S	3	12.2mm	CTB92VE/13S	13	50.3mm
CTB92VE/4S	4	16mm	CTB92VE/14S	14	54.1mm
CTB92VE/5S	5	19.8mm	CTB92VE/15S	15	57.9mm
CTB92VE/6S	6	23.7mm	CTB92VE/16S	16	61.8mm
CTB92VE/7S	7	27.5mm	CTB92VE/17S	17	65.6mm
CTB92VE/8S	8	31.3mm	CTB92VE/18S	18	69.4mm
CTB92VE/9S	9	35.1mm	CTB92VE/19S	19	73.3mm
CTB92VE/10S	10	38.9mm	CTB92VE/20S	20	77mm
CTB92VE/11S	11	42.7mm			

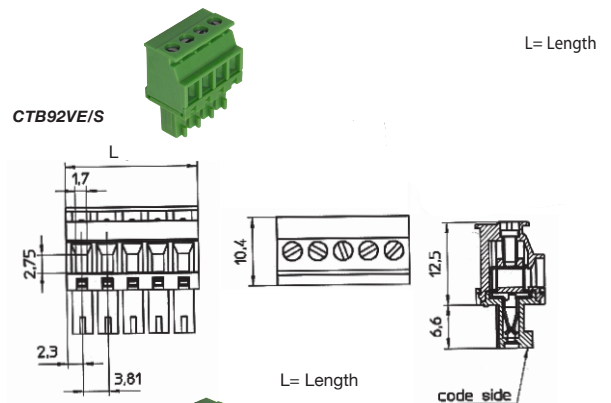

### Female connector vertical (reversed)

TYPE NO.	POLES	LENGTH	TYPE NO.	POLES	LENGTH
CTB92VE/2R	2	8.4mm	CTB92VE/12R	12	46.5mm
CTB92VE/3R	3	12.2mm	CTB92VE/13R	13	50.3mm
CTB92VE/4R	4	16mm	CTB92VE/14R	14	54.1mm
CTB92VE/5R	5	19.8mm	CTB92VE/15R	15	57.9mm
CTB92VE/6R	6	23.7mm	CTB92VE/16R	16	61.8mm
CTB92VE/7R	7	27.5mm	CTB92VE/17R	17	65.6mm
CTB92VE/8R	8	31.3mm	CTB92VE/18R	18	69.4mm
CTB92VE/9R	9	35.1mm	CTB92VE/19R	19	73.3mm
CTB92VE/10R	10	38.9mm	CTB92VE/20R	20	77mm
CTB92VE/11R	11	42.7mm			

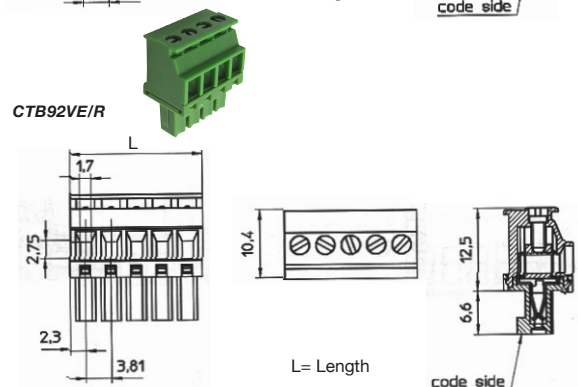

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [camden manufacturer](#):*

Other Similar products are found below :

[412689X](#) [CTBP92HE/10](#) [CTBP92VE/12R](#) [CTBP9350/12](#) [IND515205-240-T/GRN](#) [IND515205-240-T/RD](#) [IND5032405-240-T/GRN](#)  
[CE10.00.EI](#) [C192SHAND](#) [RTM5006/16-PAT](#) [CNMB/6ST/2](#) [CNMB/4ST/2](#) [CSACST004](#) [CTBP9200/9](#) [CIME/M/BE2250SS](#) [CHH64E1BL](#)  
[CIM/15W-DMFS](#) [CHHBAT2GY](#) [CFTBN/2](#) [CCB2S1/04](#) [CHDX6-222C](#) [CHDX8-224](#) [CHDASMP29](#) [CHDASMP34](#) [CHDX810DD](#)  
[CHDX811DD](#) [CCTTM40LR](#) [CTBP92VJ/5S](#) [CTBP92VJ/8R](#) [CTSN431/12/M](#) [CTSN433/12/M](#) [CUABOX006](#) [IND513113-LED-RD](#)  
[CE10.00.FM](#) [CBRPH-BLK](#) [RX2008/S-5-WH](#) [CBARD-CAR](#) [CRDCG0007](#) [CNMB/4/KIT](#) [CTB5050/5](#) [CTBP92HE/11](#) [CTBP9358/10AO](#)  
[CHH66C2GY](#) [CHH456PBK](#) [CHH451ABK](#) [CIM/9W-DMFS](#) [CIM/25W-DMFS](#) [RTM5004/14-NC-BLK](#) [RTM5006/16-NC-BLK](#)  
[IND5032405-125-T/AMB](#)