

## Proximity Switch - Reed Switch based - Rectangular - Normally Open Contacts

Part Number : CTC012


Suggested Magnet: CTCM

### Product Data Sheet

#### PICTURE



#### DIMENSIONS

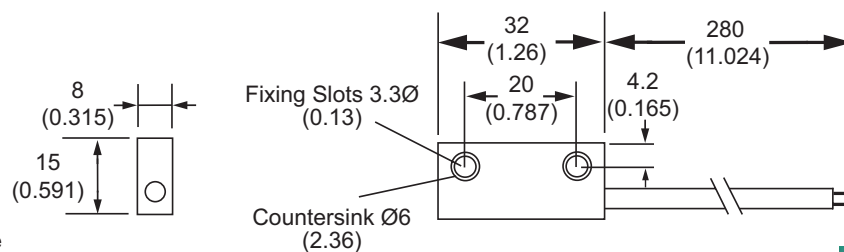

Drawings not to scale  
All dimensions in mm nominal

✓ RoHS Compliant

#### SPECIFICATION

Contact Form / Style	Normally Open
Switching Voltage	200 Vac
Switching Current	0.5 A
Switching Capacity (Resistive)	10 VA
Switching Distance	10.0 mm Minimum
Operating Temperature - Continuous	-20°C +85°C
Operating Temperature - Intermittent	-25°C +85°C
Storage temperature	-25°C +85°C
Case Material	Aluminium
Cable	2 x 0.14mm <sup>2</sup> PVC Covered

#### Applications Include

- Position and limit sensing.
- Linear actuators.
- Security system switch.
- Door Switch.

#### Options

- Custom cable lengths, strip lengths, cable types, terminations.
- Higher Switching Voltage available.
- If you do not see what you need, just ask, as there is a strong possibility we can do it !

#### Did you know we also sell?



#### Rev. No.

1

#### Revision Note

First Issue

#### Date

19-07-06

#### Signature

NG

FORM AE043 ISS.2



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone : +44 (0)1255 862236

www.assemtech.co.uk

Fax: +44 (0)1255 862014

©2006 Copyright Assemtech Europe Ltd, Unit 7, Rice Bridge Industrial Estate, Thorpe - Le - Soken, Essex, CO16 0HL, ENGLAND.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Proximity Sensors](#) category:*

*Click to view products by [Comus](#) manufacturer:*

Other Similar products are found below :

[01.001.5653.1](#) [70.340.1028.0](#) [70.360.2428.0](#) [70.364.4828.0](#) [70.810.1053.0](#) [72.360.1628.0](#) [73.363.6428.0](#) [9221350022](#) [980659-1](#) [QT-12](#)  
[E2EX10D1NN](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2EX2ME2N](#) [E2E-X3D1-N](#) [10M](#) [E2E-X4MD1-G](#) [E2FMX1R5D12M](#) [E2K-F10MC1](#) [5M](#)  
[EI1204TBOSL-6](#) [EI5515NPAP](#) [BSA-08-25-08](#) [IC08ANC15PO-K](#) [IMM2582C](#) [25.161.3253.0](#) [25.332.0653.1](#) [25.352.0653.0](#) [25.352.0753.0](#)  
[25.523.3253.0](#) [9151710023](#) [922FS1.5C-A4P-Z774](#) [SC606ABV0S30](#) [SM952A126100LE](#) [A1220EUA-T](#) [F3S-A162-U](#) [CL18](#) [QT-08L](#)  
[34.110.0010.0](#) [TL-C2MF1-M3-E4](#) [IMM32188C](#) [IS2](#) [IS31SE5000-UTLS2-TR](#) [34.110.0021.0](#) [34.110.0022.0](#) [CA150-120VACDC](#)  
[VM18VA3000Q](#) [XS508BSCBL2](#) [XS512BLNAM12](#) [XS512BLNBL2](#) [XS512BLPAL5](#) [XS518B1MBU20](#)