



5mm Pitch **High Current 90°** Rising Clamp Terminal

Features

- 2 & 3 pole double interlocking mechanism for increased strength
- 4-12 pole pre-assembled
- Moulded in green UL94-V0 flame retardant PA66
- Professional rising clamp terminals
- 4mm² cable entry
-  & CE approved VDE pending
- Guided pin alignment
- Captive screw




CTB0750

Type No.	Poles	Length
CTB0750/2	2	10mm
CTB0750/3	3	15mm
CTB0750/4	4	20mm
CTB0750/5	5	25mm
CTB0750/6	6	30mm
CTB0750/7	7	35mm
CTB0750/8	8	40mm
CTB0750/9	9	45mm
CTB0750/10	10	50mm
CTB0750/11	11	55mm
CTB0750/12	12	60mm

Specification


Rating	24A/450V
Dielectric strength	≥ 2.5kV/60sec
Insulation resistance	≥ 5MΩ
Working temperature	-20°C to 125°C
Short period	160°C
Moulding	UL94-V0 flame retardant PA66
Pin/terminal	5μ tinned, nickel plated brass
Wire clamp	Nickel plated brass
Screw/torque	M3 steel, 6μ zinc colour passivated and tropicalised/0.5Nm
Recommended PCB hole size	ø1.3mm




For other dimensions see CTB0700

5mm Pitch **36 Pole** Rising Clamp Terminal


Features

- Unique 36 pole strip
- Easily cut to required number of poles
- Can be supplied pre-cut
- Anti solder wicking
- Moulded in grey UL94-V0 flame retardant Lexan
- Professional rising clamp terminals
- 4mm² cable entry
- , UL, VDE & CE approved
- Guided pin alignment
- Captive screw

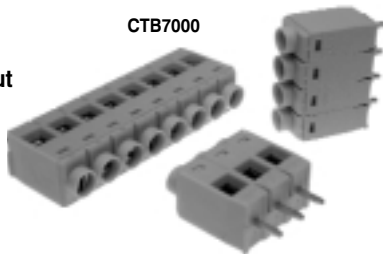

CTB7000

Type No.	Poles	Length
CTB7000/1	1	5mm
CTB7000/2	2	10mm
CTB7000/3	3	15mm
CTB7000/4	4	20mm
CTB7000/5	5	25mm
CTB7000/6	6	30mm
CTB7000/7	7	35mm
CTB7000/8	8	40mm
CTB7000/9	9	45mm
CTB7000/10	10	50mm
CTB7000/11	11	55mm
CTB7000/12	12	60mm
CTB7000/18	18	90mm
CTB7000/36	36	180mm

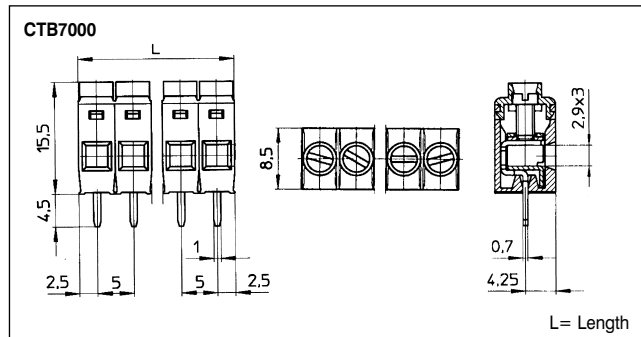

Specification

Rating	17.5A/380V
Dielectric strength	≥ 2.5kV
Insulation resistance	≥ 5MΩ
Working temperature	-20°C to 125°C
Short period	160°C
Moulding	UL94-V0 flame retardant Lexan
Pin/terminal	5μ tinned, nickel plated brass
Rising clamp	Zinc plated steel
Screw/torque	M2.5 steel, 6μ zinc colour passivated and tropicalised/0.4Nm
Recommended PCB hole size	ø1.3mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [camden manufacturer](#):

Other Similar products are found below :

[412689X](#) [CTBP92HE/10](#) [CTBP92VE/12R](#) [CTBP9350/12](#) [IND515205-240-T/GRN](#) [IND515205-240-T/RD](#) [IND5032405-240-T/GRN](#)
[CE10.00.EI](#) [C192SHAND](#) [RTM5006/16-PAT](#) [CNMB/6ST/2](#) [CNMB/4ST/2](#) [CSACST004](#) [CTBP9200/9](#) [CIME/M/BE2250SS](#) [CHH64E1BL](#)
[CIM/15W-DMFS](#) [CHHBAT2GY](#) [CFTBN/2](#) [CCB2S1/04](#) [CHDX6-222C](#) [CHDX8-224](#) [CHDASMP29](#) [CHDASMP34](#) [CHDX810DD](#)
[CHDX811DD](#) [CCTTM40LR](#) [CTBP92VJ/5S](#) [CTBP92VJ/8R](#) [CTSN431/12/M](#) [CTSN433/12/M](#) [CUABOX006](#) [IND513113-LED-RD](#)
[CE10.00.FM](#) [CBRPH-BLK](#) [RX2008/S-5-WH](#) [CBARD-CAR](#) [CRDCG0007](#) [CNMB/4/KIT](#) [CTB5050/5](#) [CTBP92HE/11](#) [CTBP9358/10AO](#)
[CHH66C2GY](#) [CHH456PBK](#) [CHH451ABK](#) [CIM/9W-DMFS](#) [CIM/25W-DMFS](#) [RTM5004/14-NC-BLK](#) [RTM5006/16-NC-BLK](#)
[IND5032405-125-T/AMB](#)