



OPTICALLY COUPLED BILATERAL SWITCH NON-ZERO CROSSING TRIAC



APPROVALS

- UL recognised, File No. E91231 under Package System 'KK'

'X' SPECIFICATION APPROVALS

- VDE 0884 in 3 available lead forms : -
- STD
- G form
- SMD approved to CECC 00802

DESCRIPTION



The MOC302_ series are optically coupled isolators consisting of a Gallium Arsenide infrared emitting diode coupled with a light activated silicon bilateral switch performing the functions of a triac mounted in a standard 6 pin dual-in-line package.

FEATURE

- Options :-
10mm lead spread - add G after part no.
Surface mount - add SM after part no.
Tape&reel - add SMT&R after part no.
- High Isolation Voltage (5.3kV_{RMS}, 7.5kV_{PK})
- 400V Peak Blocking Voltage
- All electrical parameters 100% tested
- Custom electrical selections available

APPLICATIONS

- CRTs
- Power Triac Driver
- Motors
- Consumer appliances
- Printers

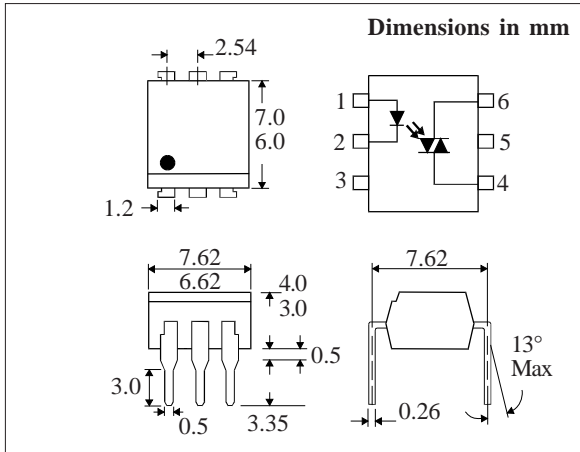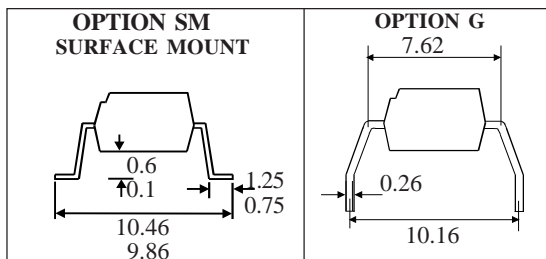

ABSOLUTE MAXIMUM RATINGS (25 °C unless otherwise noted)

Storage Temperature	-55°C - +150°C
Operating Temperature	-40°C - +100°C
Lead Soldering Temperature	260°C
(1.6mm from case for 10 seconds)	

INPUT DIODE

Forward Current	50mA
Reverse Voltage	6V
Power Dissipation	70mW
(derate linearly 0.93mW/°C above 25°C)	

OUTPUT PHOTO TRIAC

Off-State Output Terminal Voltage	400V
Forward Current (Peak)	1A
Power Dissipation	300mW
(derate linearly 4.0mW/°C above 25°C)	

POWER DISSIPATION

Total Power Dissipation	330mW
(derate linearly 4.4mW/°C above 25°C)	

ISOCOM COMPONENTS 2004 LTD
Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, Cleveland, TS25 1UD
Tel: (01429) 863609 Fax: (01429) 863581

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)


PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F) Reverse Current (I_R)		1.2	1.5	V μA	$I_F = 10\text{mA}$ $V_R = 6\text{V}$
Output	Peak Off-state Current (I_{DRM}) Peak Blocking Voltage (V_{DRM}) On-state Voltage (V_{TM}) Critical rate of rise of off-state Voltage (dv/dt) (note 1) Critical rate of rise of commutating Voltage (dv/dt) (note 1)	400	1.5	100	nA V V $\text{V}/\mu\text{s}$ $\text{V}/\mu\text{s}$	$V_{\text{DRM}} = 400\text{V}$ (note 1) $I_{\text{DRM}} = 100\text{nA}$ $I_{\text{TM}} = 100\text{mA}$ (peak) $I_{\text{load}} = 15\text{mA}$, $V_{\text{IN}} = 30\text{V}$ (fig 1.)
Coupled	Input Current to Trigger (I_{FT}) (note 2) IS6015 IS6010 IS6005 MOC3023 Holding Current , either direction (I_H) Input to Output Isolation Voltage V_{ISO}			15 10 5	mA mA mA μA V_{RMS} V_{PK}	$V_D = 3\text{V}$ (note 2) See note 3 See note 3

Note 1. Test voltage must be applied within dv/dt rating.


Note 2. Guaranteed to trigger at an I_F value less than or equal to max. I_{FT} , recommended I_F lies between Rated I_{FT} and absolute max. I_{FT} .

Note 3. Measured with input leads shorted together and output leads shorted together.


FIGURE 1

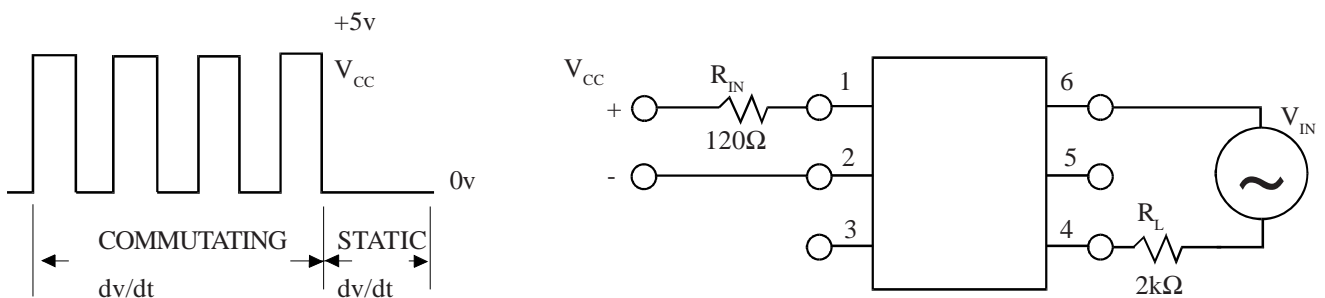


RMS On-state Current vs. Ambient Temperature

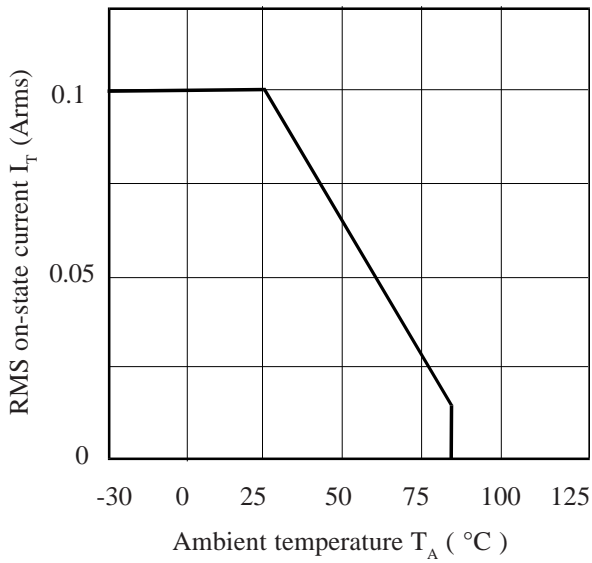


Normalised Repetitive Peak Off-state Voltage vs. Ambient Temperature

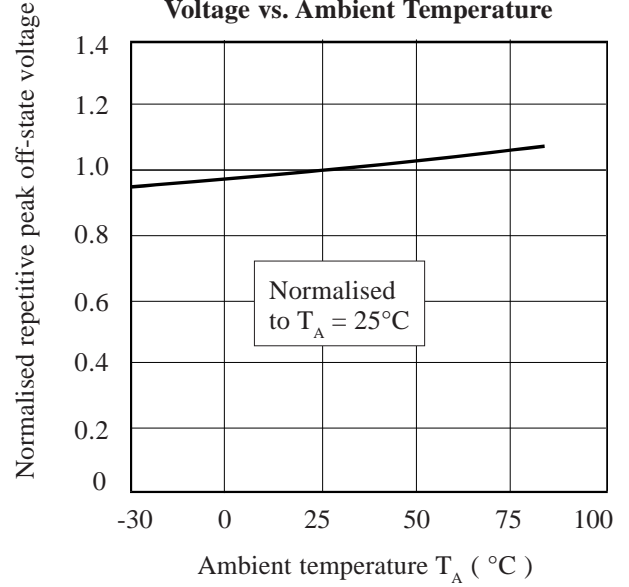


Forward Current vs. Ambient Temperature

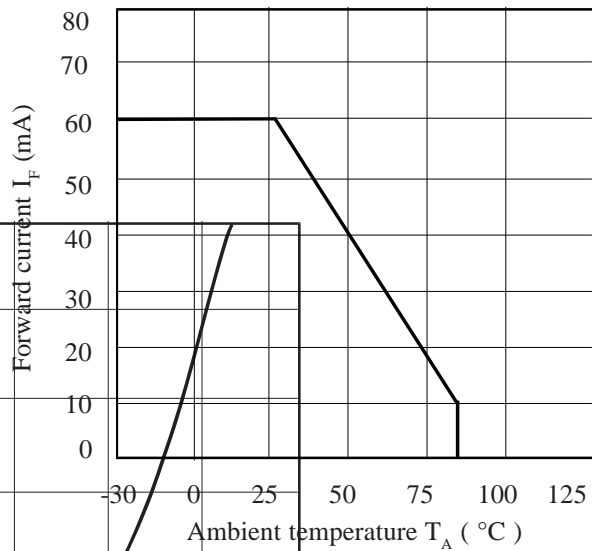


On-state Voltage vs. Ambient Temperature

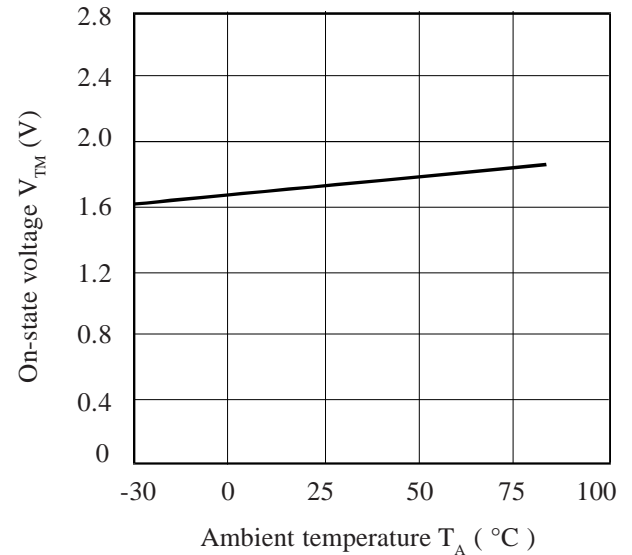

Normalised Input Trigger Current vs. Ambient Temperature

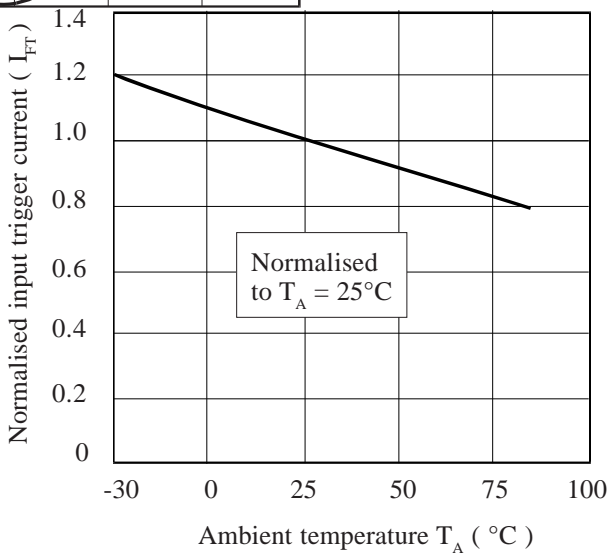

On-state Current vs. On-state Voltage

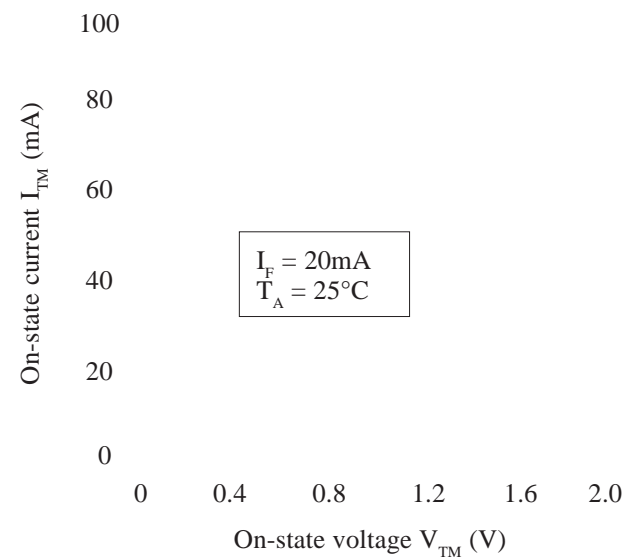

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [isocom](#) manufacturer:

Other Similar products are found below :

[SFH615A-2SM](#) [H11A1](#) [MOC3021M](#) [ISD74X](#) [IS60SM](#) [MOC3043X](#) [ICPL4503SM](#) [PS2505-4](#) [MOC3021XSM](#) [MOCD207](#) [ISP620-1X](#)
[4N26X](#) [IS60SMT&R](#) [MOC3083](#) [MOC3081M](#) [ICPL2531SM](#) [PS2502-2](#) [IS341W](#) [SFH617A-4X](#) [MOC3043M](#) [PS2502-2SM](#) [ILQ74X](#)
[MOC3021X](#) [ICPL2601](#) [IS181C](#) [PS2502-4SM](#) [ICPL2530SM](#) [MOC3041SM](#) [ISQ74X](#) [4N25X](#) [CNY17-2XSM](#) [CNY17-1XSM](#) [MOC3023M](#)
[H11AA1XSM](#) [ISQ2X](#) [PS2505-4SM](#) [TIL199](#) [4N32FSM](#) [4N35X](#) [MOC3020X](#) [H21A3](#) [IS281C](#) [MOC3061X](#) [ISP817B](#) [MOC3041M](#)
[ICPL2631](#) [ILQ1XSM](#) [MOC3022X](#) [CNY17F-3X](#) [ICPL2631SM](#)