

1633ENS

Networking Cables
Datatwist® cable
CAT 5E SF/UTP LSNH
2012-07-11 v3


Applications

- Horizontal and building backbone cable
- Support current and future Category 5e applications, such as:
1000Base-T (Gigabit Ethernet), 100 Base-T, 10 Base-T, FDDI, ATM

General standards

- International standard: ISO/IEC 11801 2nd edition (2002) and ISO/IEC 11801 Amendment 2 (2010)
- European standard: EN 50173-1 (2002) and EN 50173-1 Amendment 1 (2009)
- U.S. Standards: ANSI/TIA/EIA 568-B.2-1 (2002)

Construction & Dimensions

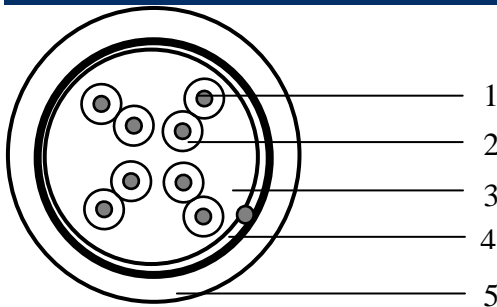

- | | | |
|--------------------------|---|---|
| 1. Conductor | Material
Diameter | Solid bare copper ETP
AWG 24 |
| 2. Insulation | Material
Nominal diameter over insulation | Polyethylene
1.05 mm |
| 3. Cable core | Pair
Number of pairs
Colour code pair 1
Colour code pair 2
Colour code pair 3
Colour code pair 4
Foil | 2 twisted insulated conductors
4, all twisted together
White / Blue & Blue
White / Orange & Orange
White / Green & Green
White / Brown & Brown
Overlapping polyester foil over cable core |
| 4. Foil shielding | Material
Position aluminium
Drain wire material
Drain wire diameter | Laminated Aluminium / Polyester
Facing outside, in contact with drain wire
Solid tinned copper
AWG 26 |

Mechanical characteristics

	Specification	Unit
Elongation at break of the conductors	8	%
Minimum elongation at break of the insulation	≥ 100	%
Minimum elongation at break of the sheath	≥ 100	%
Tensile strength of sheath	> 9	MPa

Environmental and overall characteristics

	Specification	Unit
Maximum operating voltage (for all temperatures cable is intended to be used)	72	V D.C.
Maximum continuous current per conductor (@25°C)	1.5	A
Temperature rating installation	0 / 50	°C
Temperature rating operation	- 30 / 60	°C
Total cable weight	45	kg/km
Minimum bending radius (during operation and installation)	24 / 48	mm
Maximum pulling strength	72	N
Burning load	440	kJ/m
Smoke density acc. to IEC 61034-1/2 & EN50268-1/2; transmittance	> 60	%
Amount of halogen acid gas acc. to IEC 60754-1/2 & EN50267-1/2; pH	> 4.3	
Amount of halogen acid gas acc. to IEC 60754-1/2 & EN50267-1/2; Conductivity	< 10	µS/mm
Fire performance according IEC 60332-1	Pass	



Belden declares this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [belden manufacturer](#):

Other Similar products are found below :

[HIPWP2LA](#) [8916-BRN-100](#) [8916-GRN/YEL-500](#) [8916-YEL-500](#) [8918-GRY-1000](#) [8919-DK-BLU-100](#) [5T00UP 008500](#) [7810A-BLK-500](#)
[7860NBH](#) [7934A-BLK-1000](#) [7937A-BLK-1000](#) [8019-100](#) [8058](#) [8080](#) [8108-060-1000](#) [8125-CHR-100](#) [8132-CHR-1000](#) [8133-CHR-1000](#)
[8155-CHR-1000](#) [8162-060-1000](#) [8162-CHR-1000](#) [8164-CHR-100](#) [8164-CHR-1000](#) [8185-CHR-100](#) [8205-CHR-1000](#) [8221-BLK-1000](#) [8233-](#)
[010-1000](#) [8233-BLK-1000](#) [8237-BLK-500](#) [8238-BLK-500](#) [8241A-BLK-1000](#) [8241F-RED-MATTE-1000](#) [8263-BLK-U1000](#) [8279-BLK-](#)
[1000](#) [8281-003-1000](#) [8281 010500](#) [83002 0101000](#) [83003-006-500](#) [83007 0081000](#) [83008 0091000](#) [83010-RED-100](#) [83029 0021000](#) [8302-](#)
[CHR-500](#) [8303 060500](#) [8307-CHR-100](#) [8310-060-1000](#) [8310-CHR-1000](#) [83305E 009100](#) [83347E 009100](#) [8348-060-500](#)