
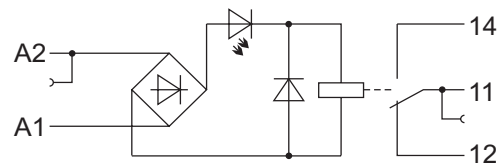


# Electronic Terminal Block with Miniature Switching Relay

1/2

1 changeover contact

Data sheet

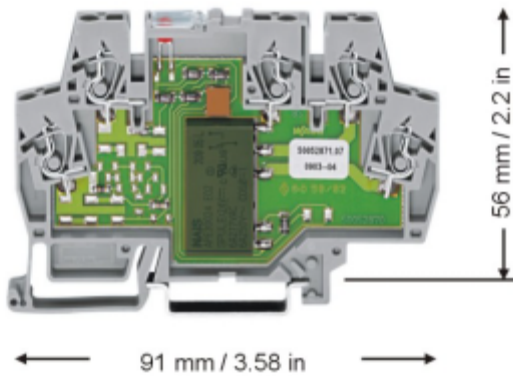

Description	Item-No.	Pack.-unit pcs																																																		
Switching relay terminal block	859-354	1																																																		
<ul style="list-style-type: none"> <li>Switching relay terminal block with miniature switching relay 1 changeover contact for medium switching powers.</li> <li>Safe electrical isolation meets DIN VDE 0140, DIN EN 61140.</li> <li>Mounting on DIN 35 rail.</li> </ul>	<b>Technical Data</b>																																																			
<p>DC-Load limiting value graph</p>	<table border="1"> <tbody> <tr><td>Contact material</td><td>AgSnO<sub>2</sub></td></tr> <tr><td>Input nominal voltage U<sub>N</sub></td><td>AC/DC 24 V</td></tr> <tr><td>Input voltage range</td><td>U<sub>N</sub> -15 %...+20 %</td></tr> <tr><td>Input nominal current I<sub>N</sub> (coil 20 °C)</td><td>8 mA / 6 mA</td></tr> <tr><td>Max. switching voltage</td><td>AC 250 V</td></tr> <tr><td>Max. continuous current (terminal blocks in a row)</td><td>5 A</td></tr> <tr><td>Max. switching power (resistive)</td><td>AC 1250 VA</td></tr> <tr><td>(resistive)</td><td>DC see load limiting value graph</td></tr> <tr><td>Making capacity</td><td>10 A at max. 4 s and 10 % relative cyclic duration factor</td></tr> <tr><td>Recommended min. load</td><td>≥ 100 mA / AC/DC 12 V</td></tr> <tr><td>Max. number of switching operations with/without load</td><td>6 min<sup>-1</sup> / 20 s<sup>-1</sup></td></tr> <tr><td>Operating power</td><td>&lt; 300 mW</td></tr> <tr><td>Pull-in/dropout/bounce time t<sub>vp</sub></td><td>5 ms / 6 ms / 5 ms</td></tr> <tr><td>Operation at normal rating</td><td>100 % continuous duty</td></tr> <tr><td>Dielectric strength contact/coil</td><td>4 kV</td></tr> <tr><td>Surge voltage strength contact/coil (1.2/50 μs)</td><td>6 kV</td></tr> <tr><td>Open contact</td><td>1 kV</td></tr> <tr><td>Nominal voltage acc. to VDE 0110 Part1/ 4.97</td><td></td></tr> <tr><td>IEC 60664-1</td><td>250 V / 4 kV / 3</td></tr> <tr><td>Mechanical life at max. load (resistive)</td><td>5 x 10<sup>6</sup> switching operations / 3 x 10<sup>4</sup> switching operations</td></tr> <tr><td>Ambient operating temperature at 0.85 x U<sub>N</sub></td><td>-25 °C...+40 °C</td></tr> <tr><td>at U<sub>N</sub></td><td>-25 °C...+50 °C</td></tr> <tr><td>at 1.2 x U<sub>N</sub></td><td>-25 °C...+40 °C</td></tr> <tr><td>Storage temperature</td><td>-40 °C...+70 °C</td></tr> <tr><td>Terminal block width</td><td>6 mm / 0.236 in</td></tr> </tbody> </table>		Contact material	AgSnO <sub>2</sub>	Input nominal voltage U <sub>N</sub>	AC/DC 24 V	Input voltage range	U <sub>N</sub> -15 %...+20 %	Input nominal current I <sub>N</sub> (coil 20 °C)	8 mA / 6 mA	Max. switching voltage	AC 250 V	Max. continuous current (terminal blocks in a row)	5 A	Max. switching power (resistive)	AC 1250 VA	(resistive)	DC see load limiting value graph	Making capacity	10 A at max. 4 s and 10 % relative cyclic duration factor	Recommended min. load	≥ 100 mA / AC/DC 12 V	Max. number of switching operations with/without load	6 min <sup>-1</sup> / 20 s <sup>-1</sup>	Operating power	< 300 mW	Pull-in/dropout/bounce time t <sub>vp</sub>	5 ms / 6 ms / 5 ms	Operation at normal rating	100 % continuous duty	Dielectric strength contact/coil	4 kV	Surge voltage strength contact/coil (1.2/50 μs)	6 kV	Open contact	1 kV	Nominal voltage acc. to VDE 0110 Part1/ 4.97		IEC 60664-1	250 V / 4 kV / 3	Mechanical life at max. load (resistive)	5 x 10 <sup>6</sup> switching operations / 3 x 10 <sup>4</sup> switching operations	Ambient operating temperature at 0.85 x U <sub>N</sub>	-25 °C...+40 °C	at U <sub>N</sub>	-25 °C...+50 °C	at 1.2 x U <sub>N</sub>	-25 °C...+40 °C	Storage temperature	-40 °C...+70 °C	Terminal block width	6 mm / 0.236 in
Contact material	AgSnO <sub>2</sub>																																																			
Input nominal voltage U <sub>N</sub>	AC/DC 24 V																																																			
Input voltage range	U <sub>N</sub> -15 %...+20 %																																																			
Input nominal current I <sub>N</sub> (coil 20 °C)	8 mA / 6 mA																																																			
Max. switching voltage	AC 250 V																																																			
Max. continuous current (terminal blocks in a row)	5 A																																																			
Max. switching power (resistive)	AC 1250 VA																																																			
(resistive)	DC see load limiting value graph																																																			
Making capacity	10 A at max. 4 s and 10 % relative cyclic duration factor																																																			
Recommended min. load	≥ 100 mA / AC/DC 12 V																																																			
Max. number of switching operations with/without load	6 min <sup>-1</sup> / 20 s <sup>-1</sup>																																																			
Operating power	< 300 mW																																																			
Pull-in/dropout/bounce time t <sub>vp</sub>	5 ms / 6 ms / 5 ms																																																			
Operation at normal rating	100 % continuous duty																																																			
Dielectric strength contact/coil	4 kV																																																			
Surge voltage strength contact/coil (1.2/50 μs)	6 kV																																																			
Open contact	1 kV																																																			
Nominal voltage acc. to VDE 0110 Part1/ 4.97																																																				
IEC 60664-1	250 V / 4 kV / 3																																																			
Mechanical life at max. load (resistive)	5 x 10 <sup>6</sup> switching operations / 3 x 10 <sup>4</sup> switching operations																																																			
Ambient operating temperature at 0.85 x U <sub>N</sub>	-25 °C...+40 °C																																																			
at U <sub>N</sub>	-25 °C...+50 °C																																																			
at 1.2 x U <sub>N</sub>	-25 °C...+40 °C																																																			
Storage temperature	-40 °C...+70 °C																																																			
Terminal block width	6 mm / 0.236 in																																																			
<p><b>Note:</b> Inductive loads have to be attenuated by an appropriate protective circuit in order to protect relay coils and contacts !</p>																																																				

# Electronic Terminal Block with Miniature Switching Relay

2/2

1 changeover contact

**Data sheet**

	Wire connection	CAGE CLAMP®		
		0.08-2.5 mm <sup>2</sup> / AWG 28-14		
	Stripped length	5-6 mm / 0.22 in		
	Standards / prescriptions	VDE 0435 Part 201, DIN EN 61810-1		
		VDE 0140, DIN EN 61140		
	Approvals	cUL <sub>us</sub>		
		UL508 / CSA22.2		
		E175199		
		<b>CB scheme</b>		
		IEC 60947-1 / IEC 60947-5-1		
		DEMKO DK-7574		
		AC15	3 A	AC 250 V
		DC13	0.5 A	DC 24 V
	Accessories			
	End and intermediate plate	859-525		
	Comb type jumper bar 2-way	859-402		
		3-way	859-403	
	4-way	859-404		
	5-way	859-405		
	10-way	859-410		
Test pin 1 mm Ø	859-500			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [General Purpose Relays](#) category:*

*Click to view products by [Wago](#) manufacturer:*

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)  
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)  
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)  
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)  
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)  
[7-1393144-5](#) [7-1393767-8](#)