


APHC-07107-S

Peltier cooler module

Data sheet

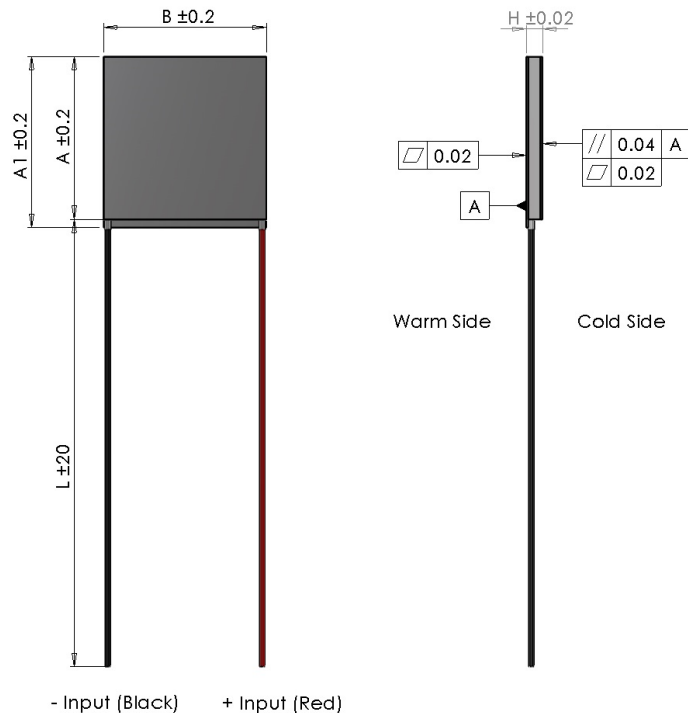

Features

- RoHs and Reach 161 compliant
- Solid-state reliability
- Built with high temperature solder with the ability to withstand <200°C assembly processing temperatures for short periods of time
- High integrity nickel diffusion barriers on elements
- High strength for rugged environments
- Porched style for enhanced leadwire strength
- Sealed & lapped for multi-module applications

I _{max}	[A]	7.4
V _{max}	[Vdc]	8.2
P _c max	[W]	39
ACR	[Ω]	0.9
ΔT _{max}	[°C]	65
A	[mm]	30
A1	[mm]	30
B	[mm]	34
H	[mm]	3.53
L	[mm]	100
Wire	AWG	20





- (At hot side temperature $T_h = 27^\circ\text{C} / 300\text{K}$, under dry N_2)
- $P_c \text{ max}$ = Cooling power at $\Delta T = 0$ and $I = I_{\text{max}}$
- ΔT_{max} = Temperature difference at $I = I_{\text{max}}$ and $P_c = 0$
- Max hot side temperature $T_h = 200^\circ\text{C}$ for best long term performance
- Max mounting pressure: 1.5MPa



APHC-07107-S

Peltier cooler module





Data sheet - At hot side temperature 25°C

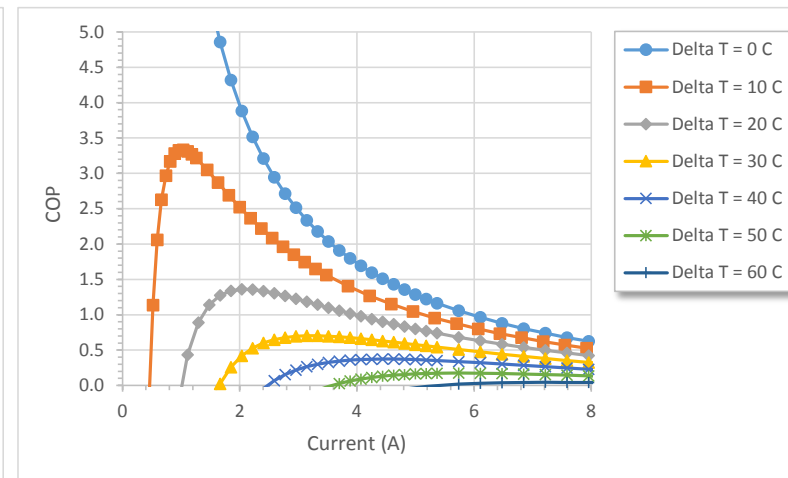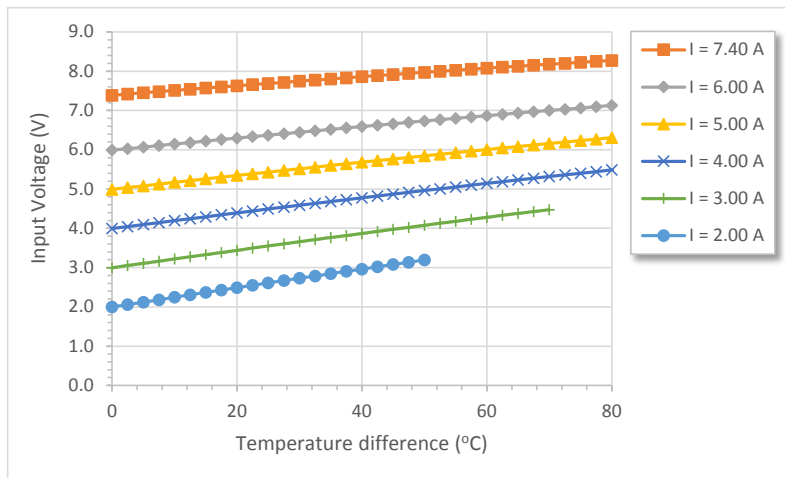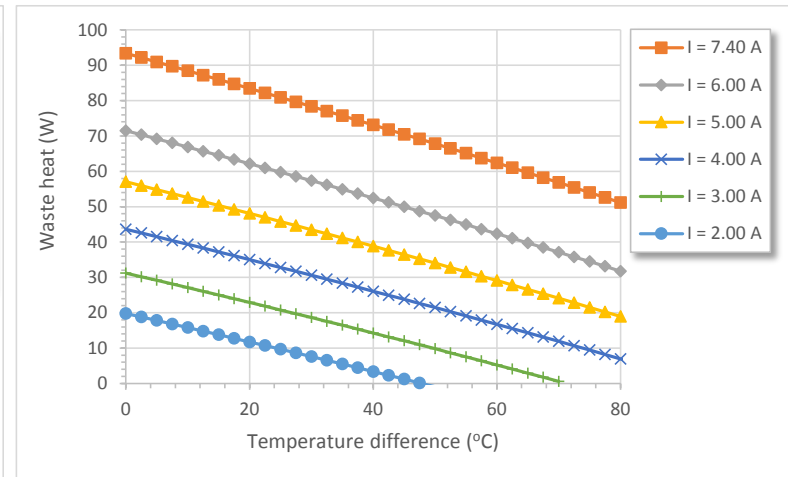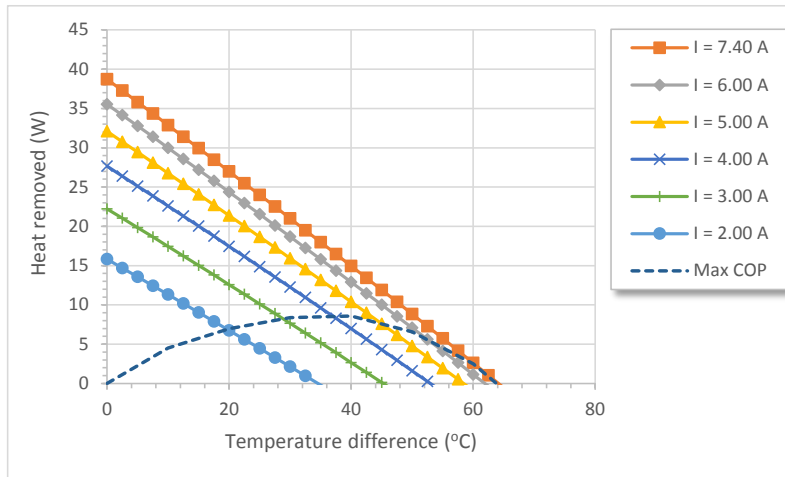

APHC-07107-S

Peltier cooler module





Data sheet - At hot side temperature 50°C

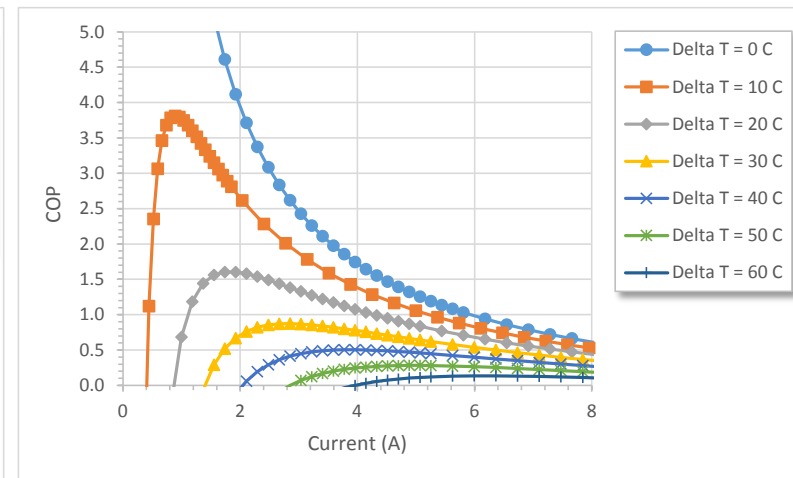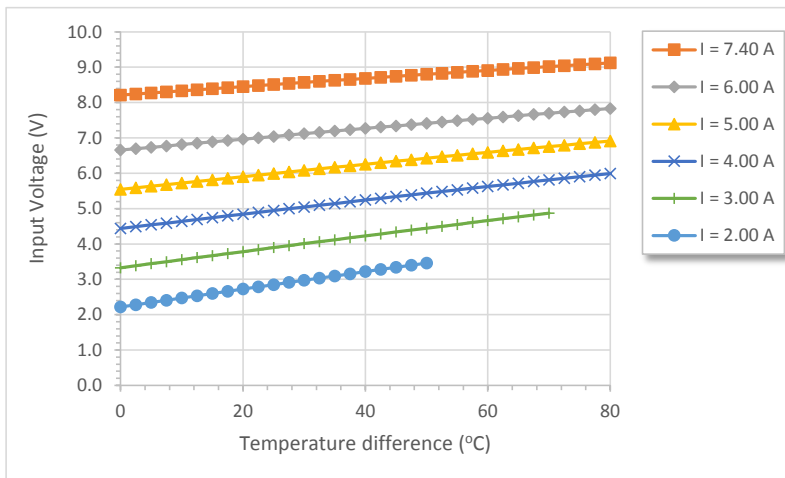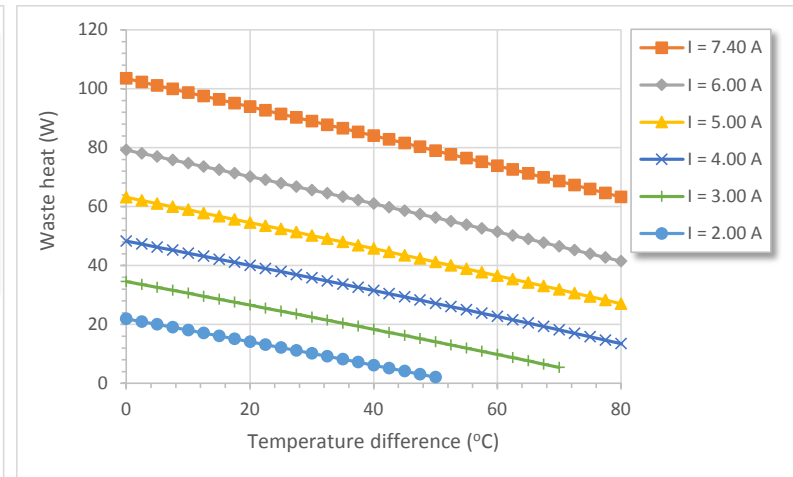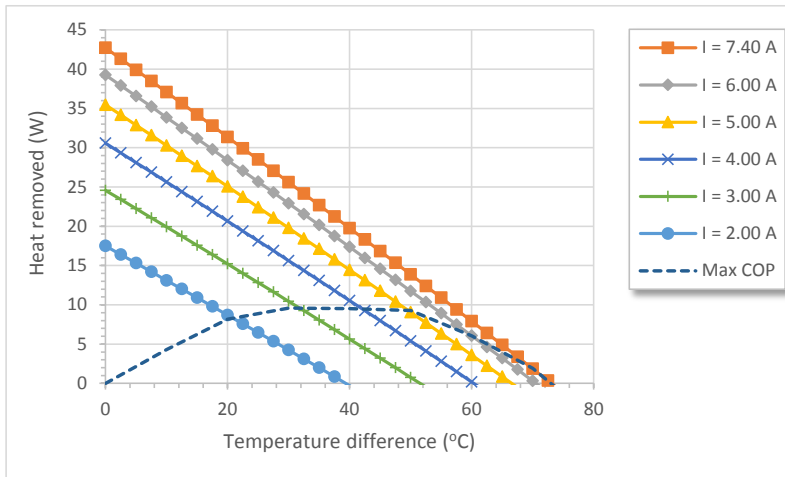

APHC-07107-S

Peltier cooler module

Data sheet - At hot side temperature 75°C

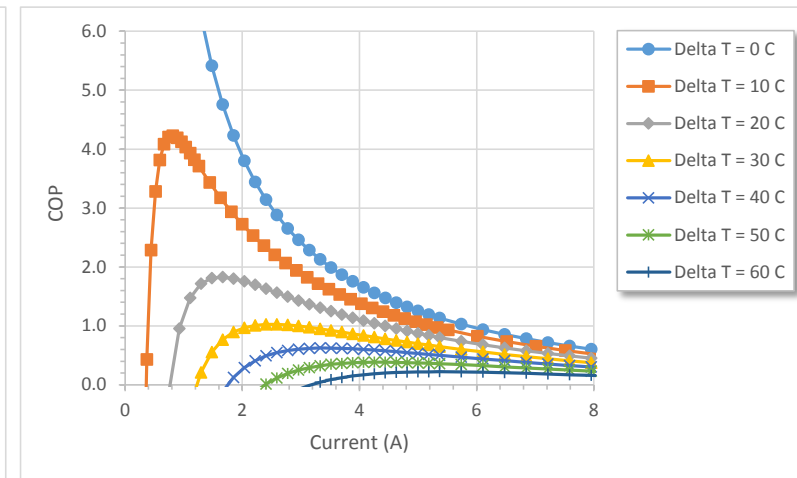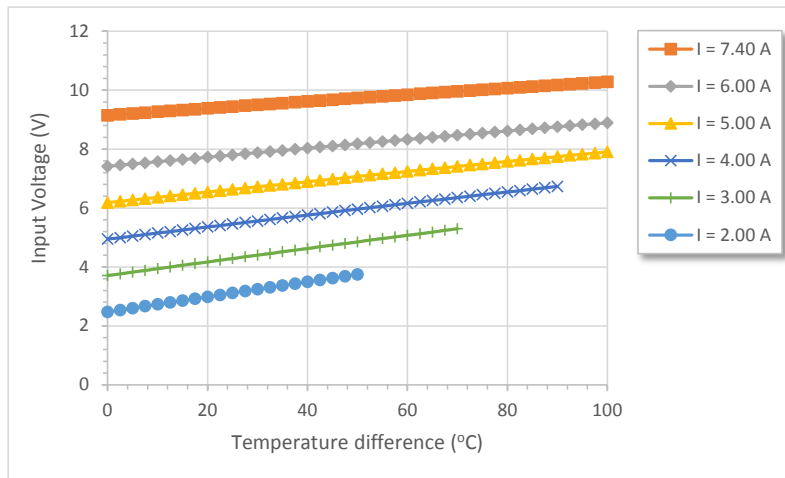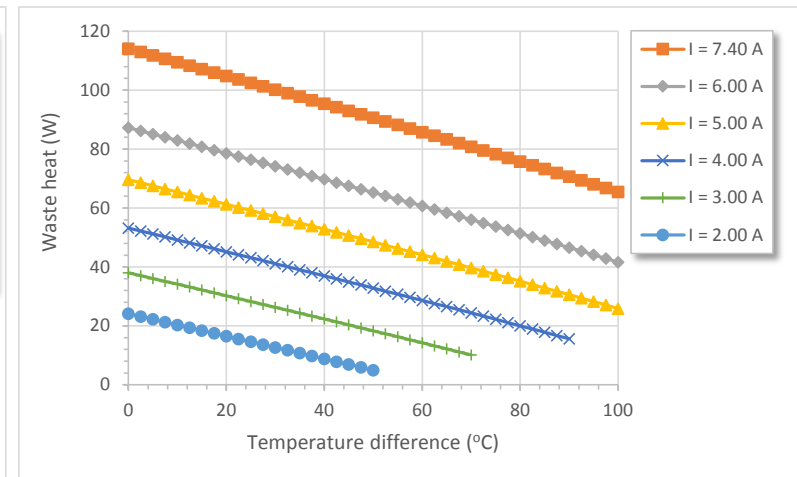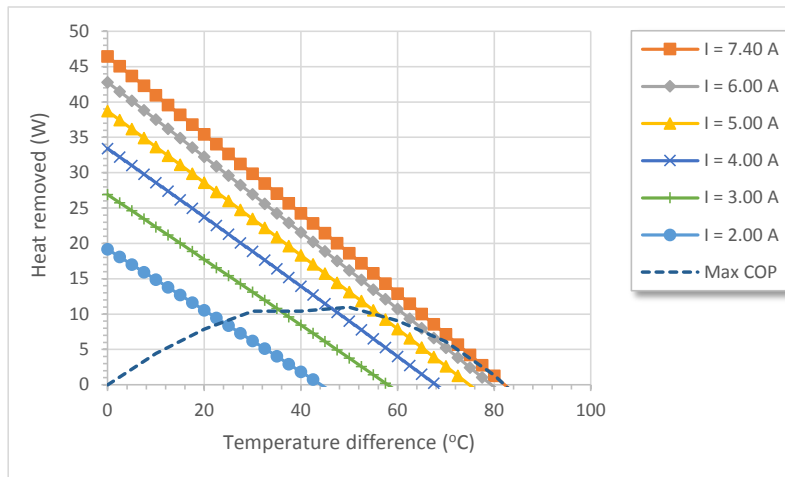

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [european thermodynamics manufacturer](#):

Other Similar products are found below :

[AP3-070-20-25](#) [APHC-12706-S](#) [SF-06-150-S](#) [APH-031-10-13-S](#)