

Vis à tête cyl. large fendue (Pan-Head) (CLS) **DIN 85 A¹⁾**

4.8


Slotted pan head machine screws

~ISO 1580
~NFE 25-128

BN 1362 brute/plain
BN 344 zinguées/zinc plated
BN 346 zinguées-jaunes/zinc yellow dich.

Paquets / Packages

IP paquets industriels / industry packages

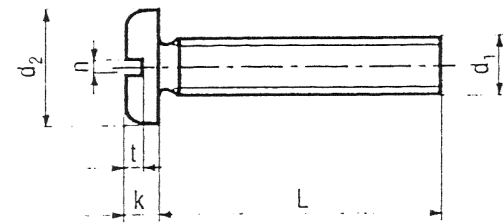

Matière: acier
Material: steel
Limite d'élasticité: 320 N/mm²
Yield strength:

Classe de résistance: **4.8**
Property class:
Allongement après rupture: min. 14%
Elongation after fracture:

Résistance à la traction: 400 N/mm²
Tensile strength:
Toutes les longueurs avec filetage ~ sous tête
all lengths fully threaded

d ₁	M2,5 ²⁾	(M2,6) ²⁾	M3	(M3,5)	M4	M5	M6	M8
d ₂	5	5	6	7	8	10	12	16
k max.	1,5	1,5	1,8	2,1	2,4	3	3,6	4,8
n	0,6	0,6	0,8	1	1,2	1,2	1,6	2
t min.	0,6	0,6	0,7	0,8	1	1,2	1,4	1,9
Charge d'épr. en N	990	1250	1560	2100	2720	4400	6230	11400
Proof load N								

Valeurs indicatives pour le poids voir page 5.002
Standard values for weight see page 5.002

d ₁	M2,5				(M2,6)			
	<input type="checkbox"/> BN 1362		<input type="checkbox"/> BN 344		<input checked="" type="checkbox"/> BN 346		<input type="checkbox"/> BN 344	
L	3	•	•	•	•			
	4	•	•	•	•			
	5	•	•	•	•	•	•	•
	6	•	•	•	•	•	•	•
	8	•	•	•	•	•	•	•
	10	•	•	•	•	•	•	•
	12			•	•	•	•	•
	(14)			•	•			
	16			•	•	•	•	
	(18)			•	•			
	20			•	•	•	•	
	(22)			•	•			
	25			•	•			
	30			•	•			
	200	IP	200	IP	200	IP	200	IP

¹⁾ Norme abrogée et remplacée dans le cadre de la normalisation européenne par la norme ISO correspondante.
Standard withdrawn and replaced under European standardization by the corresponding ISO standard.

²⁾ Ne sont pas dans DIN 85A
Not included in DIN 85A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [nettlefolds](#) manufacturer:

Other Similar products are found below :

[SEM03030006FA](#) [SEM03040012FA](#) [SEM03040006FA](#)