HUBBELL USB Charger 4 Port Outlet

More Power - Charge Faster

5 Amps of USB Capacity

Charge Multiple Smart Devices
Simultaneously

4 Stainless Steel Ports

- More Capacity
- Rated for 10,000 insertions and removals

Green Power Enabled

- Port Door Switch
- Shuts Off Power When Not-in-Use

FEATURES

- Four USB ports 5 Amp, 5V DC, type A, class 2.0
- Switch activated port door; when opened delivers power, when closed shuts off power
- Green LED indicator to show USB power available
- Heavy duty stainless steel USB ports; rated for 10,000 cord insertions and removals
- Solid or stranded wire use:
 - Hot + Neutral: back wire compression clamp
 - Ground: back or side wire

SPECIFICATIONS

- USB 5 Amp, 5V DC
- Input voltage: 125V AC, 60Hz
- Zero no load power consumption when not-in-use
- Circuit feed-through 20 Amp, 125 Volt
- #14-10 AWG gauge wire terminals
- Dielectric withstand: 1500V AC for 1 minute
- Operating temperature: maximum continuous 75° C; minimum -40° C (without impact)
- Meets UL94 for 5V flammability rating
- Complies with battery charging specification USB BC1.2
- Compatible with USB 1.1/2.0/3.0 devices, including Apple products
- Complies with Part 15 of the FCC rules
- cETLus to UL 1310



Hubbell's USB 4 Port Charger provides USB power in a standard single gang electrical opening. Designed to provide maximum charging for personal electronics, the USB ports are capable of delivering a total of 5 amps to multiple electronics simultaneously. The outlet features a USB port door, which when opened enables power, when closed all power is switched off. This eliminates all current flow for a "zero" no load draw. Buildings looking to provide 100% green efficiency in power delivery will maximize LEED and energy design.

APPLICATIONS

Ideal for use in new construction and renovation to add capacity for USB charging. Especially suited for use in universities, dormitories, hotels, hospitals, medical labs, restaurants, airports, classrooms and homes.

Designed for use with:

Apple® Products

iPad®

iPod®

iPhone®

Digital Readers

Smart Watches

USB fans, lights and accessories

Tablet computers

Smart Phones

Mobile Phones

MP3 Players

GPS

Other USB compatible products







Apple, iPad, iPod and iPhone are registered trademarks of Apple Inc.

ORDERING INFORMATION

USB 4 PORT OUTLET		
Description	Color	Catalog Number
USB Charger 4 Port Outlet, Four USB Type 2.0 Ports, 5 Amp, 5 Volt DC, Style Line® Decorator	Black Brown Gray Ivory Light Almond White	USB4BK USB4 USB4GY USB4I USB4LA USB4W




Energy Information					
120V AC	Energy consumed when USBs are not in use		Energy consumed when USBs are fully used		
Input Power	No Load Current	"0"	Full Load Current	0.46A	
	No Load Watts	"0"	Full Load Watts	29.3W	

This outlet is capable of delivering up to 5 amps 5V DC of USB power. If multiple smart devices are plugged in the individual ports will allocate power as determined by the smart devices.

Suitable for use on circuits with AFCI and GFCI protection.

DIMENSIONS Inches (mm)

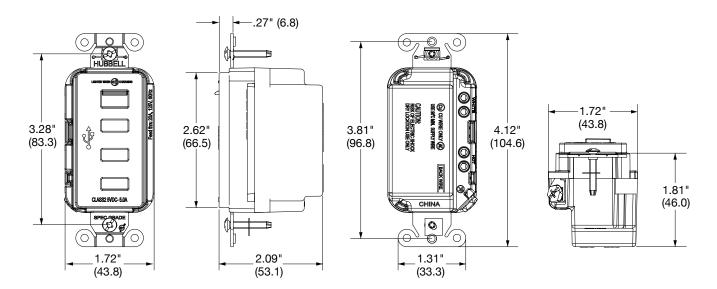

Note: For use with boxes deeper than 1.5" with internal AC/MC clamps.





X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for hubbell manufacturer:

Other Similar products are found below:

CFB7TALU 03301045 02216024 03301047 5369VY 5461 WSS1P 00322005LPK50 01304055 M001SG000 M001SG00P M11MSP 01301013 02201005 02202008 02203007 02203064 02206012 02211003 02211019 02402005 02406006 02407008 CS1223GY CS6360C CS6370 7310 MCMA14110 7485VBLK 7585 7716 7967 FF3I PF2004PA005 PFOLT312 PH2003PA010 PH2304PB050 PH6598W 9308 GFP2305 GFR5352IA GFR5362WTR GFR8300SNAPBKNA PM3004PA015 HBL13R12D HBL16LEDR HBL18201WCN HBL20GBA612IV HBL20IG606GY HBL23007