

# SPECIFICATION CONTROL DRAWING


55/1122

TITLE TWO CONDUCTOR CABLE, SHIELDED, JACKETED, OUTER SPACE, 600 VOLT

Date 12-8-06

Revision F

This specification sheet forms a part of the latest issue of Raychem Specification 55/.

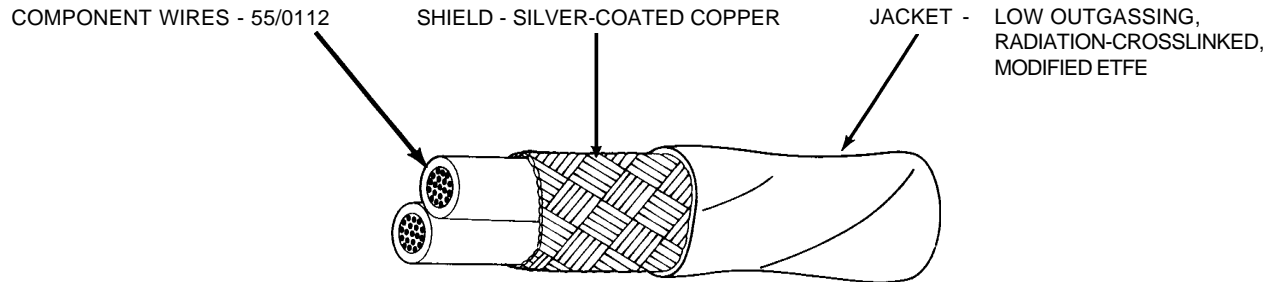

### CABLE CONSTRUCTION DETAILS

PART NUMBER 1/	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inches)		OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lb/1000 ft)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55/1122-28-*	28	38	.006	.008	.087	.092	6.3
55/1122-26-*	26	38	.006	.008	.097	.102	7.9
55/1122-24-*	24	38	.006	.008	.107	.112	9.8
55/1122-22-*	22	38	.006	.008	.119	.125	12.2
55/1122-20-*	20	38	.006	.008	.133	.140	16.2
55/1122-18-*	18	38	.006	.008	.153	.161	21.9
55/1122-16-*	16	38	.006	.008	.169	.177	26.6
55/1122-14-*	14	38	.006	.008	.203	.213	38.4
55/1122-12-*	12	38	.007	.009	.241	.253	55.1

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

**TEMPERATURE RATING: 200°C**

Maximum continuous conductor temperature  
**VOLTAGE RATING:** 600 volts (rms) at sea level  
**CROSSLINK VERIFICATION:** 300 ± 3°C for 1 hour  
**DIELECTRIC WITHSTAND:** 1500 volts (rms), 60 Hz  
**JACKET COLOR:** White preferred  
**JACKET ELONGATION:** 50% (minimum)  
**JACKET FLAWS:**  
 Spark Test, 1000 volts (rms)  
 Impulse Dielectric Test, 6.0 kV (peak)  
**RADIATION RESISTANCE:** 500 megarads  
**SHIELD COVERAGE:** 85% (minimum)

**VACUUM STABILITY:**

Total Mass Loss (TML), 1.00% (maximum)  
 Volatile Condensable Material, 0.10% (maximum)  
**VOLTAGE WITHSTAND TEST (Post Environmental):**  
 1500 volts (rms), 60 Hz, 1 minute

**PART NUMBER:**

The "\*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

1/ Example: AWG 24, black and white component wires;  
 white jacket: 55/1122-24-0/9-9

**NOTE:** Nominal values are for information only.  
 Nominal values are not requirements.

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx"). OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.  
 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multi-Conductor Cables](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[89182-010-1000](#) [6000FE-877-1000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [6502FE 8771000](#) [6541PA-008-U1000](#)  
[CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [82841-877-5000](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#) [83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469 060100](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-500](#) [877541-000](#) [8780-060-1000](#) [88444-002-1000](#) [9159-060-500](#) [939870-000](#) [9423 060U500](#) [9444 060U1000](#) [9497 0001000](#) [9515-060-1000](#) [9520-060-1000](#) [9524-060-1000](#) [9546-060-500](#) [9572-002-U500](#) [9774-060-1000](#) [1213F-D15-A1000](#) [1213F-009-A1000](#)