
# **Comus Group of Companies**

#### PRODUCT DATA SHEET

Manufactured in UK



Direction of acceleration to close contacts

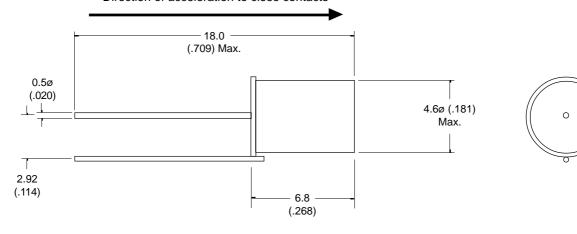

Drawings not to scale All dimensions in mm (inches) nominal

## **SPECIFICATION**

| CONTACT FORM/STYLE             |               | Normally open       |
|--------------------------------|---------------|---------------------|
| SWITCHING VOLTAGE              | Max. Vac      | 24                  |
| SWITCHING CURRENT              | Max. A        | 0.25                |
| SWITCHING CAPACITY (RESISTIVE) | Max. VA       | 5                   |
| CONTACT RESISTANCE             | Max. $\Omega$ | 10                  |
| OPERATING TEMPERATURE          | Deg. °C       | -20° + 85°          |
| STORAGE TEMPERATURE            | Deg. °C       | -25° + 90°          |
| ACTIVATION LEVEL               | G             | 10 - 14.9           |
| CASE MATERIAL                  |               | Steel - gold plated |

NOTE: When cutting or bending switch leads it is important that the glass seal is not damaged. The cutting or bending point should be no closer than 3mm (.118) to the glass to metal seal and the lead should be supported between the cutting or bending point and the glass to metal seal.

#### **ACCELERATION and SHOCK SWITCH**

PART NUMBER ASLS-10

Rev. No.Revision NoteDateSignatureBWeb Site 20011-2-01RG

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.

The Comus Group of Companies consist of:
Assemtech Europe Limited
E. Bachem GmbH
Comus International
W. Gunther GmbH
Gunther Belgium
Gunther France
S.T.G.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for comus manufacturer:

Other Similar products are found below:

WGA56D25Z WG660D110Z WG280A25Z PGN-SP-003 WG660D10Z WGA316D25R WG660D90Z S1456 S1366 S1355 WGA316D45R

3570.1331.121 WG280D90Z WGA312D25Z WG280D10R 3572.1220.051 WG660D125Z WGA56A10Z CTC 012 CTI 302

RF3002A/HFS30 WG280D90R WG280A10Z WGA012D25 WG660D25Z MS24 PPS24 3570.1411.053 WG280D45R VFS30

WG480D75Z WG660D75Z WGA56D25R PGN-SP-002 WGA56D40Z WG660D50Z WG280D50Z WGA56A25Z WG280D75Z PSM

S1747 WG480D90Z WG480D40Z WG280A45Z MMPSA 240/30 LH PSSM MPSM 3563.1231.053 WGA56D10Z WG280D45Z