


Premium cable ties with steel locking barb  
 Product reference structure for  
 standard ties



To the standard Product Reference, you can add special order codes for: material, packaging size, material properties and colours.

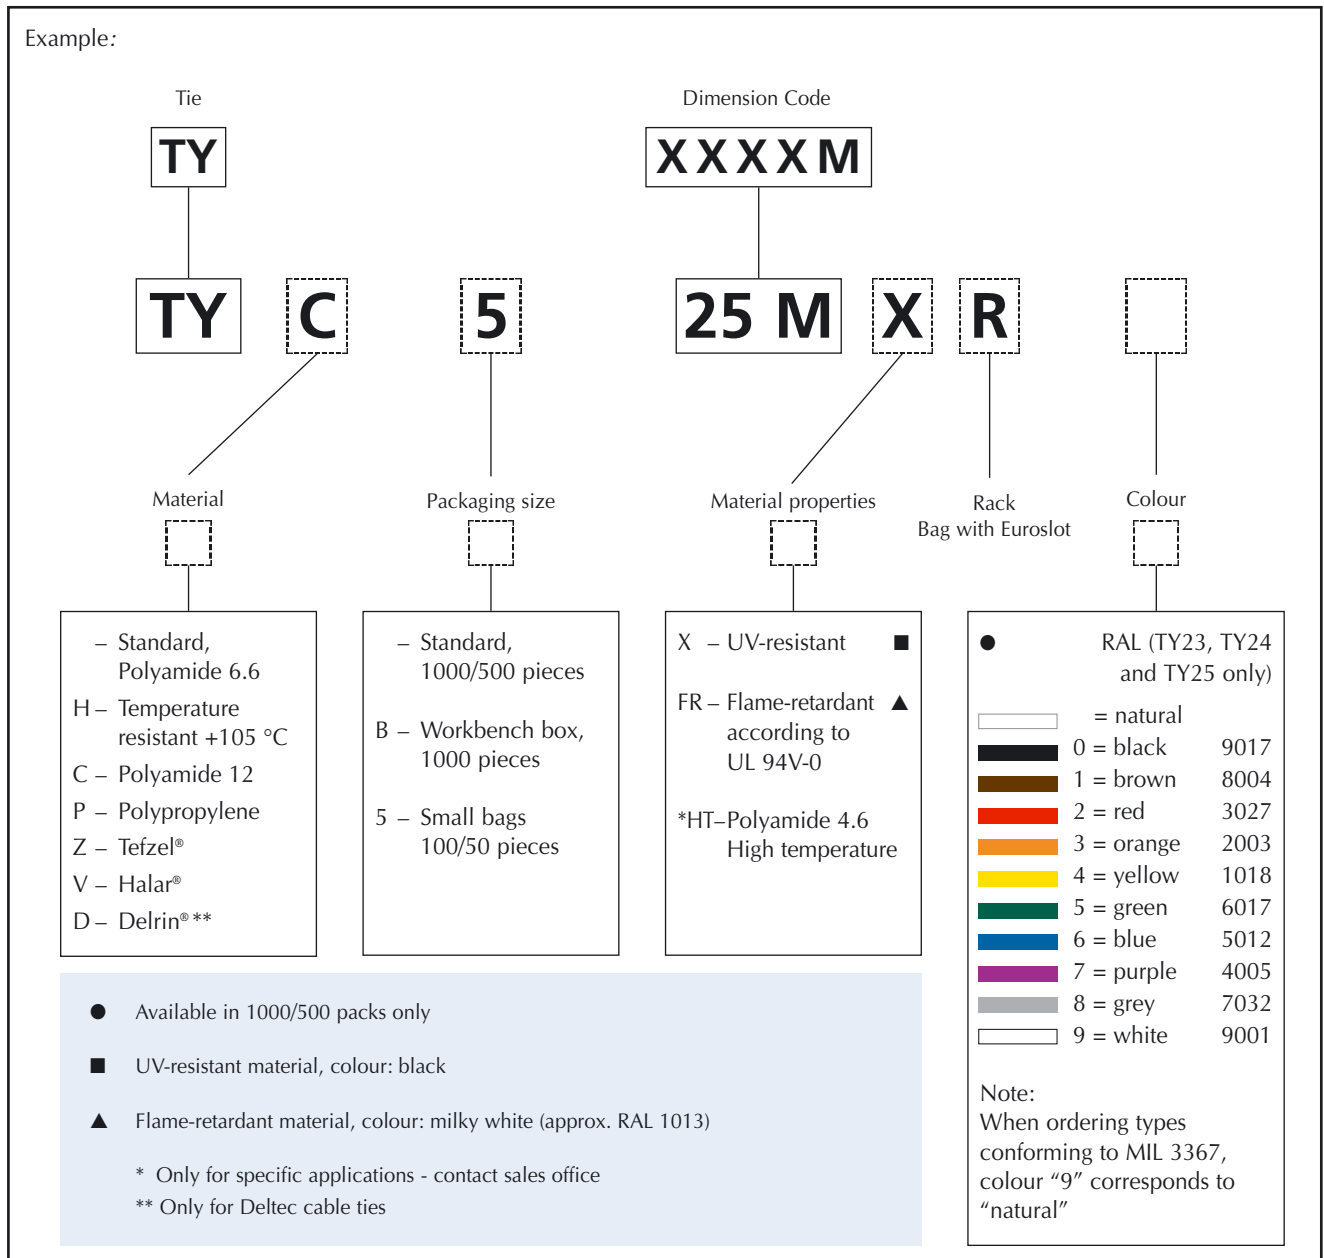

Tefzel® and Delrin® are registered trademark of DuPont de Nemours  
 Halar® is a registered trademark of Solvay Solexis

# Ty-Rap®

## Premium cable ties with steel locking barb Standard ties

### Product overview

The main characteristics of the Ty-Rap® cable ties are shown on pages 8 and 9.

To cover the most demanding applications, the standard Ty-Rap® cable ties are available in:


- Several lengths
- 6 typical widths, with a tensile strength up to 780N
- 6 different materials, with a total of 9 different grades (see pages 102 to 109 for material specifications & selection)
- Several colours and packaging sizes (see page 10)



### Approvals



E49405



### Technical Information

Material	Polyamide 6.6
Temperature range	-40°C to +85°C
Colour	Natural
Flammability rating	UL 94 V-2
Other properties	Halogen free, Silicone free

### Ordering Information: Standard Polyamide 6.6 cable ties

PRODUCT REF.	MIL SPEC.	LENGTH	WIDTH	THICKNESS	BUNDLE DIAMETER FROM ... TO	MINIMUM TENSILE	QUANTITY	TOOLING
		L [mm]	W [mm]			STRENGTH [N]		
TY23M / TYB23M	MS-3367-4	92	2.4	1.0	2 - 16	80	1000	
TYB2315M	-	178	2.4	1.0	2 - 32	80	1000	
TY232M	-	203	2.4	1.0	2 - 50	80	1000	ERG299
TY234M	-	356	2.4	1.0	2 - 102	80	1000	WT193A
TY24M / TYB24M	MS-3367-5	140	3.6	1.1	2 - 29	180	1000	TR227
TY242M	-	208	3.6	1.1	2 - 50	180	1000	
TY26M	-	284	3.6	1.1	2 - 76	130	1000	
TY244M	-	368	3.6	1.1	2 - 103	130	1000	
TY25M / TYB25M	MS-3367-1	186	4.8	1.1	3.5 - 45	220	1000	ERG299, ERG297
TY253M	MS-3367-7	290	4.8	1.1	3.5 - 78	220	1000	WT193A
TY28M	MS-3367-2	360	4.8	1.1	3.5 - 102	220	1000	TR227
TY271M	-	150	7.6	1.5	6 - 31	540	500	
TY272M	-	222	7.6	1.6	6 - 50	540	500	
TY27M	MS-3367-3	340	7.0	1.6	6 - 90	540	500	L-500-EU
TY275M	-	457	7.0	1.6	6 - 127	540	500	ERG297
TY277M	-	617	7.0	1.6	6 - 177	540	500	
TY29M	MS-3367-6	771	7.6	1.6	6 - 229	540	500	
TY53510M	-	889	8.1	1.7	to 254	780	50	WT3D
TY54513M	-	1143	8.1	1.7	to 330	780	50	L-500-EU

Available in other colours: see page 10 for description of colours and packaging sizes

Description of materials and properties: see pages 102 to 109

For tooling specifications, see pages 92 to 99



# Ty-Rap<sup>®</sup>


## Premium cable ties with steel locking barb Standard ties



### Approvals



E49405



### Technical Information

Material	Polyamide 6.6
Temperature range	-40°C to +85°C
Colour	Black
Flammability rating	UL 94 V-2
Other properties	UV-resistant, Halogen free, Silicone free

### Ordering Information: Polyamide 6.6 UV-stabilised cable ties

PRODUCT REF.	MIL SPEC.	LENGTH	WIDTH	THICKNESS	BUNDLE DIAMETER	MINIMUM TENSILE STRENGTH	QUANTITY	TOOLING
		L [mm]	W [mm]					
TY23MX / TYB23MX	MS-3367-4	92	2.4	1.0	2 - 16	80	1000	
TYB2315MX	-	178	2.4	1.0	2 - 32	80	1000	
TY232MX	-	203	2.4	1.0	2 - 50	80	1000	
TY234MX	-	356	2.4	1.0	2 - 102	80	1000	ERG299
TY24MX / TYB24MX	MS-3367-5	140	3.6	1.1	2 - 29	130	1000	WT193A
TY242MX	-	208	3.6	1.1	2 - 50	130	1000	TR227
TY26MX	-	284	3.6	1.1	2 - 76	130	1000	
TY244MX	-	368	3.6	1.1	2 - 103	130	1000	
TY25MX / TYB25MX	MS-3367-1	186	4.8	1.1	3.5 - 45	220	1000	ERG297
TY253MX	MS-3367-7	290	4.8	1.1	3.5 - 78	220	1000	ERG299
TY28MX	MS-3367-2	360	4.8	1.1	3.5 - 102	220	1000	WT193A, TR227
TY271MX	-	150	7.6	1.5	6 - 31	540	500	
TY272MX	-	222	7.6	1.6	6 - 50	540	500	
TY27MX	MS-3367-3	340	7.0	1.6	6 - 90	540	500	L-500-EU
TY275MX	-	457	7.0	1.6	6 - 127	540	500	ERG297
TY277MX	-	617	7.0	1.6	6 - 177	540	500	
TY29MX	MS-3367-6	771	7.6	1.6	6 - 229	540	500	
TY53510MX	-	889	8.1	1.7	to 254	780	50	WT3D
TY54513MX	-	1143	8.1	1.7	to 330	780	50	L-500-EU

Description of packing sizes: see page 10

Description of materials and properties: see pages 102 to 109

For tooling specifications, see pages 92 to 99

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Wire Identification category](#):*

*Click to view products by [ABB manufacturer](#):*

Other Similar products are found below :

[CU6337-000](#) [CU6342-000](#) [FCA-410-12](#) [11631010](#) [1-1768037-1](#) [1-1768037-2](#) [1-1768050-0](#) [PXLK-VI](#) [Q62184-1](#) [A64304-000](#) [QMT221](#)  
[HK032WE1NF038B](#) [1330-0519-10](#) [1395199-1](#) [1395200-1](#) [1395202-1](#) [DMVF050WE-300S6](#) [D-SCE-1K-2.4-50-4-CS7834](#) [1538738-1](#)  
[E90935-000](#) [EC1238-000](#) [EC1465-000](#) [EC1855-000](#) [EC1859-000](#) [EC1863-000](#) [EC5415-000](#) [EC7277-000](#) [EC7352-000](#) [EC7603-000](#)  
[EC7707-000](#) [EC7735-000](#) [EC7768-000](#) [EC7828-000](#) [EC7854-000](#) [EC7952-000](#) [EC8128-000](#) [1768037-8](#) [1768041-7](#) [NC-127191-10-9](#)  
[HS048WE2NF038B](#) [C03232-000](#) [HTCM-SCE-14-4H-9](#) [HTMS-3/16-9](#) [HT-SCE-1/4-2.0-4](#) [HT-SCE-3/16-2.0-4](#) [HTTMS-1/2-1.50-9](#) [HTTMS-](#)  
[CM-1/2-4H-9](#) [HX-SCE-19.0-50-9](#) [HX-SCE-6.4-50-4](#) [C25254-000](#)