


► General data

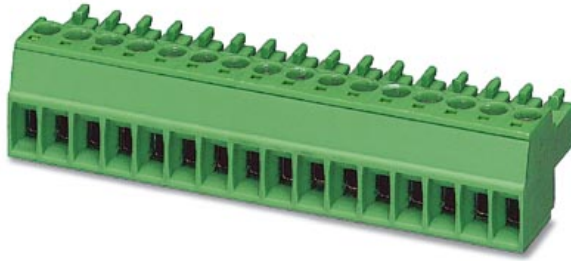

Plug component, nominal current: 8 A, rated voltage: 160 V, pitch: 3.5 mm, no. of positions: 7, type of connection: Screw connection

Order number	1840418
Type	MC 1,5/ 7-ST-3,5

Barcode number	4017918111595
Unit pack	50 Pcs.
Customs tariff	85369010000

► Technical data

Dimensions / positions

Height	11.1 mm
Pitch	3.5 mm
Dimension a	21 mm
Number of positions	7
Screw thread	M 2
Tightening torque	0.22 Nm

Technical data

Insulating material group	I
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/2)	160 V
Rated voltage (II/2)	320 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	8 A
Nominal voltage U_N	160 V
Nominal cross section	1.5 mm ²
Maximum load current	8 A (with 1.5 mm ² conductor cross section)
Insulating material	PA
Inflammability class acc. to UL 94	V0
Internal cylindrical gage	A 1
Stripping length	7 mm

Connection data

Min. conductor cross section, rigid	0.14 mm ²
Conductor cross section, rigid max.	1.5 mm ²
Conductor cross section flexible min.	0.14 mm ²
Max. conductor cross section, flexible	1.5 mm ²
Min. conductor cross section, flexible, with ferrule with plastic sleeve	0.25 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve max.	1.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve min.	0.25 mm ²
Max. conductor cross section, flexible, with ferrule with plastic sleeve	0.5 mm ²
Min. conductor cross section AWG/kcmil	28
Conductor cross section AWG/kcmil max	16
2 conductors with same cross section, solid min.	0.08 mm ²
2 conductors with same cross section, solid max.	0.5 mm ²
2 conductors of the same cross section, flexible, min.	0.08 mm ²
2 conductors with same cross section, flexible max.	0.75 mm ²
2 conductors of the same cross section, flexible, ferrules without plastic sleeve, min.	0.25 mm ²
2 conductors with identical cross section, flexible, ferrules with plastic sleeve, max.	0.34 mm ²
2 conductors of the same cross section, flexible, TWIN ferrules with plastic sleeve, min.	0.5 mm ²
2 conductors with identical cross section, flexible TWIN ferrules with plastic sleeve, max.	0.5 mm ²

► Certificates

UL


Nominal voltage U_N	300 V
Nominal current I_N	8 A
AWG/kcmil	30-14

CSA

Comments	all numbers of positions are accepted
Nominal voltage U_N	300 V
Nominal current I_N	8 A
AWG/kcmil	28-16

▶ Drawings

Dimensioned drawing



Approval logo



► Accessories

Item	Designation	Description
General		
1834398	KGK-MC 1,5/ 7	Cable housing, for cable diameters of 4 - 11 mm, clamp, marker strips and transparent label carrier are included, color: green, no. of positions: 7

Marking		
0804073	SK 3,5/2,8:FORTL.ZAHLEN	Marker card, printed horizontally, self-adhesive, 10-section marker strip, 14 identical decades marked 1-10, 11-20 etc. up to 91-100, sufficient for 140 terminal blocks

Tools		
1205037	SZS 0,4X2,5	Screwdriver, bladed, matches all screw terminal blocks up to 1.5 mm ² connection cross section, blade: 0.4 x 2.5 mm

► Additional products

Item	Designation	Description
General		
1897144	EMC 1,5/ 7-G-3,5	Header, nominal current: 8 A, rated voltage: 160 V, pitch: 3.5 mm, no. of positions: 7, mounting: press in
1911062	EMCV 1,5/ 7-G-3,5	Header, nominal current: 8 A, rated voltage: 160 V, pitch: 3.5 mm, no. of positions: 7, mounting: press in
1844265	MC 1,5/ 7-G-3,5	Header, nominal current: 8 A, rated voltage: 160 V, pitch: 3.5 mm, no. of positions: 7, mounting: Soldering
1843651	MCV 1,5/ 7-G-3,5	Header, nominal current: 8 A, rated voltage: 160 V, pitch: 3.5 mm, no. of positions: 7, mounting: Soldering

► Address

Phoenix Contact GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 3 00
Fax +49 5235 3 1200
<http://www.phoenixcontact.com>

© Phoenix Contact
Technical modifications reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [phoenix contact manufacturer](#):

Other Similar products are found below :

[1203259](#) [3240366](#) [1893300](#) [2867076](#) [3006564](#) [2800741](#) [1582539](#) [1623633](#) [3069708](#) [1582223](#) [1431461](#) [1586976](#) [0311647](#) [1460160](#)
[1771338](#) [2814605](#) [0309086](#) [1513716](#) [0202219](#) [1730667](#) [0311634](#) [1730696](#) [0311579](#) [5449843](#) [3240098](#) [0311566](#) [0201391](#) [CRIMPFOX 16](#)
[S CRIMPSET 25](#) [7001438](#) [ETD-BL-1T-F-300S](#) [MCR-1CLP-I-I-00](#) [MCR-4CLP-I-I-00](#) [MCR-DAC 8-I- 4-BUS](#) [FL EPA WMS](#) [FLK 50/EZ-](#)
[DR/ 400/KONFEK/S](#) [FLS PB M12 DO 8 M12-2A](#) [PPS CD BLADE](#) [PR1-RSC3-LV-120AC/21](#) [PSI-MOS-DNET CAN/FO 660/BM](#) [PSM-ME-](#)
[RS232/RS232-P](#) [PSM PTK-4](#) [PSM-SET-FSMA/4-KT](#) [PSR-SCP- 24DC/TS/SDI8/SDIO](#) [PSR-SCP- 24DC/URD3/4X1/2X2](#) [PT 2X2- 5DC-ST](#)
[1202580](#) [1203534](#) [1205985](#) [1206308](#)