







FV110 B

Screw-to-Tab
Terminal Block (3 poles)
with integrated earth bracket



TECHNICAL DATA


	IEC	American Standards
Ratings	450V - 40A	600V - 40A
Wire size	6.0 sqmm	22 ÷ 8AWG
Working Temperature	-5 ÷ 150 °C (short time 180 °C)	23 ÷ 221 °F
Nominal Temperature (Testing temperature)	T150 (180°C)	-
Plastic Material	Polyamide PA6.6 glass filled brown colour, UL94-V0, GWT960 °C	
Metal Parts	M5 zinc plated steel captive screw; 6.3 x 0.8 zinc plated steel tab insert; other parts made in zinc plated steel	
Marking	L - N - 	
Accessories	PA269	

Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	E2250	6.0 sqmm - 40A - 450V - T150	EN60998-1; EN60998-2-1; CEI 23-21
	E76048 vol. 1 sec. 4	22 ÷ 8AWG - 600V - 40A - 105 °C	UL 1059
	LR 40455-10	22 ÷ 8AWG - 600V - 40A	CSA C22-2 N.158-1987; E.C.N 584B

PACKAGING

Type	P-N	Pack.	Dim. Pack. (LxHxP)	Weight (Kg)
FV 110B	300801	400	40x20x40	15.0

DIMENSIONAL
DRAWING

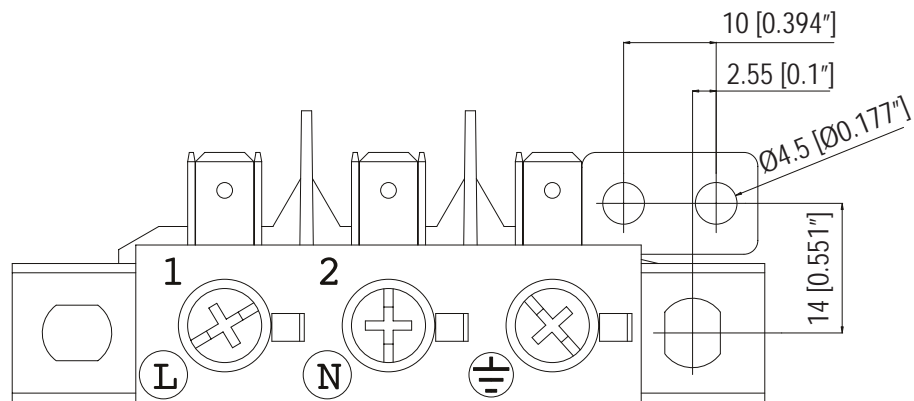

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [hylec manufacturer](#):

Other Similar products are found below :

[LN167001](#) [50.625 PA/3X7](#) [50.620 PA/R](#) [DESTB-1003](#) [THB.406.A1G](#) [THB.387.A4A.R](#) [K150-1032-00](#) [GHG9601955R0004](#) [K151-1032-00](#)
[HYKS-07612PP](#) [THB.382.A1A-KIT](#) [THB.390.A1AKIT](#) [THK.404.X2A00-F](#) [50.216 ES](#) [50.616M/EMVDL-F](#) [50.625 ES](#) [PA244SKIT](#)
[THB.387.A3A](#) [THB.405.A2A](#) [50.220 M-F](#) [HY435/12 FV](#) [THB110A6B-F](#) [50.216 M-F](#) [THB.387.B5A](#) [5625////1121](#) [THB.380.3ASSY](#)
[THB.405.A2G](#) [THA.209.A1A](#) [DESTB-1002](#) [THB.384.A1A](#) [K257-1012-00](#) [6000302CC](#) [TTK25BK-SD-F](#) [TTK20GY-SD-F](#) [DESTB-0403](#)
[THB.384.B1A](#) [50.625 PA/RSW](#) [HY508/3 V/3F](#) [5665/221](#) [THB.387.D4A](#) [THB.387.B4A](#) [THR.405.S5A](#) [THB.381.M2A](#) [THB.387.A5A](#)
[THB.387.C5A](#) [THB.387.D3A](#) [50.625 M/EMVDL-F](#) [THK.200.3T](#) [THB.381.A2A](#) [K160-1040-00](#)