

ATC 100 E Series Porcelain High RF Power Multilayer Capacitors

- Case E Size (.380" x .380")
- High Q
- Low ESR/ESL
- High RF Power
- Extended WVDC up to 7200 VDC
- Capacitance Range 1 pF to 5100 pF
- Ultra-Stable Performance
- High RF Current/Voltage
- High Reliability
- Available with Encapsulation Option*

ATC, the industry leader, offers new improved ESR/ESL performance for the 100 E Series RF Capacitors. This high Q multilayer capacitor is ultra-stable under high RF current and voltage applications. High density porcelain construction provides a rugged, hermetic package.

ATC offers an encapsulation option for applications requiring extended protection against arc-over and corona.

Typical functional applications: Bypass, Coupling, Tuning, Impedance Matching and DC Blocking.

Typical circuit applications: HF/RF Power Amplifiers, Transmitters, Antenna Tuning, Plasma Chambers and Medical (MRI coils).

*For leaded styles only

ENVIRONMENTAL TESTS

ATC 100 E Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A.

MOISTURE RESISTANCE:

MIL-STD-202, Method 106.

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:


MIL-STD-202, Method 108, for 2000 hours, at 125°C.

Voltage applied.

200% of WVDC for capacitors rated at 500 volts DC or less.

120% of WVDC for capacitors rated at 1250 volts DC or less.

100% of WVDC for capacitors rated above 1250 volts DC.

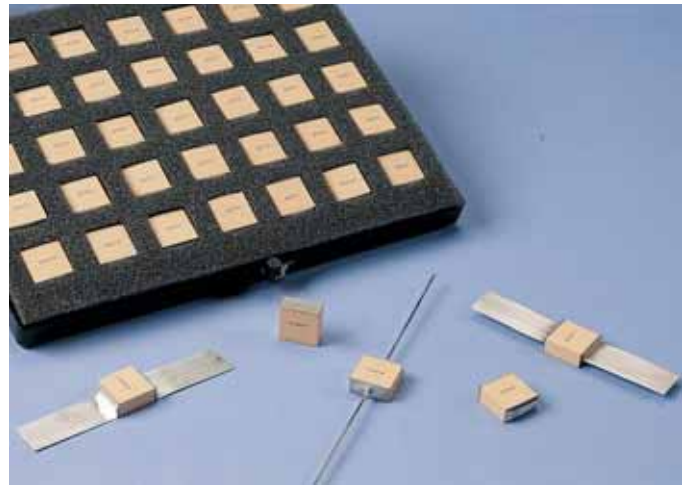

ELECTRICAL AND MECHANICAL SPECIFICATIONS

QUALITY FACTOR (Q):

Greater than 10,000 (1 pF to 1000 pF) @ 1 MHz.

Greater than 10,000 (1100 pF to 5100 pF) @ 1 KHz.

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):

+90 ±30 PPM/°C (-55°C to +125°C)

INSULATION RESISTANCE (IR):

1 pF to 5100 pF:

10⁵ Megohms min. @ +25°C at 500 VDC.

10⁴ Megohms min. @ +125°C at 500 VDC.

WORKING VOLTAGE (WVDC):

See Capacitance Values Table, page 2.

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

250% of WVDC for capacitors rated at 500 volts DC or less for 5 seconds.

150% of WVDC for capacitors rated at 1250 volts DC or less for 5 seconds.

120% of WVDC for capacitors rated above 1250 volts DC for 5 seconds.

RETRACE: Less than ±(0.02% or 0.02 pF), whichever is greater.

AGING EFFECTS: None

PIEZOELECTRIC EFFECTS: None

(No capacitance variation with voltage or pressure).

CAPACITANCE DRIFT: ±(0.02% or 0.02 pF), whichever is greater.

OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage).

TERMINATION STYLES:

Available in various surface mount and leaded styles.

See Mechanical Configurations, page 3.

TERMINAL STRENGTH: Terminations for chips and pellets

withstand a pull of 10 lbs. min., 25 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
+1-631-622-4700
sales@atceramics.com

ATC Europe
+46 8 6800410
sales@atceramics-europe.com

ATC Asia
+86-755-2386-8759
sales@atceramics-asia.com

 THE
ENGINEERS'
CHOICE®
ISO 9001 REGISTERED

www.atceramics.com

ATC # 001-809 Rev. K 3/10

ATC 100 E Capacitance Values


CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		
			STD.	EXT.				STD.	EXT.				STD.	EXT.				STD.	EXT.	
1R0	1.0				5R6	5.6				470	47				391	390		3600		
1R1	1.1			EXTENDED VOLTAGE	6R2	6.2				510	51				431	430				
1R2	1.2				6R8	6.8	B, C				560	56				471	470			
1R3	1.3				7R5	7.5	D				620	62				511	510			
1R4	1.4				8R2	8.2					680	68				561	560		2500	
1R5	1.5				9R1	9.1					750	75				621	620			
1R6	1.6				100	10					820	82				681	680			
1R7	1.7				110	11					910	91				751	750			
1R8	1.8				120	12					101	100				821	820	F, G, J,		
1R9	1.9				130	13					111	110				911	910	K, M		
2R0	2.0	B, C	3600		150	15			3600	7200	121	120	F, G, J,	3600		102	1000			
2R1	2.1	D		160	16					131	130	K, M			112	1100				
2R2	2.2			180	18					151	150				122	1200		1000		
2R4	2.4			200	20	F, G, J				161	160				152	1500				
2R7	2.7			220	22	K, M				181	180				182	1800				
3R0	3.0			240	24					201	200				222	2200				
3R3	3.3			270	27					221	220				272	2700				
3R6	3.6			300	30					241	240				302	3000				
3R9	3.9			330	33					271	270				332	3300	G, J,			
4R3	4.3			360	36					301	300				392	3900	K, M	500		
4R7	4.7			390	39					331	330				472	4700				
5R1	5.1			430	43					361	360				512	5100				

VRMS = 0.707 X WVDC

• SPECIAL VALUES, TOLERANCES, MATCHING, AND CAPACITOR ASSEMBLIES ARE AVAILABLE. • ATC'S CUSTOM POWER CAPACITOR ASSEMBLY CATALOG, ATC # 001-900 LISTS ASSEMBLY OPTIONS. • EXTENDED WORKING VOLTAGES ARE AVAILABLE FOR COMMERCIAL ORDERS ONLY. • ENCAPSULATION OPTION AVAILABLE. PLEASE CONSULT FACTORY.

CAPACITANCE TOLERANCE								
Code	B	C	D	F	G	J	K	M
Tol.	±0.1 pF	±0.25 pF	±0.5 pF	±1%	±2%	±5%	±10%	±20%

ATC PART NUMBER CODE

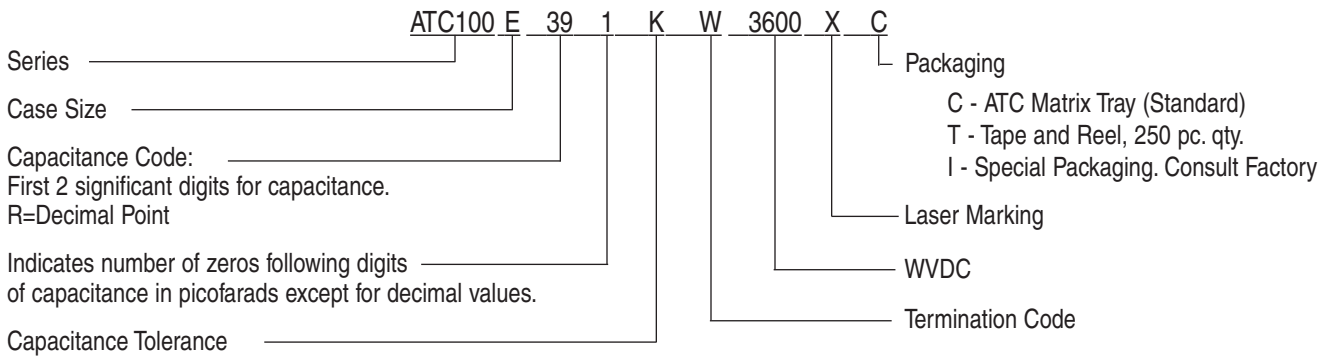

The above part number refers to a 100 E Series (case size E) 390 pF capacitor,
K tolerance (±10%), 3600 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and Waffle-packaging.

ATC accepts orders for our parts using designations **with** or **without** the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.
Consult factory for additional performance data.

















A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
+1-631-622-4700 • sales@atceramics.com

ATC Europe
+46 8 6800410 • sales@atceramics-europe.com

ATC Asia
+86-755-2396-8759 • sales@atceramics-asia.com

ATC 100 E Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPECASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS			
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS		
100E	W	 Solder Plate		.380 +.015 -.010 (9.65 +0.38 -0.25)			.040 (1.02) max.	Tin/Lead, Solder Plated over Nickel Barrier Termination		
100E	P	 Pellet		.380 +.040 -.010 (9.65 +1.02 -0.25)				Heavy Tin/Lead Coated, over Nickel Barrier Termination		
100E	T	 Solderable Nickel Barrier		.380 +.015 -.010 (9.65 +0.38 -0.25)				RoHS Compliant Tin Plated over Nickel Barrier Termination		
100E	CA	 Gold Chip		.380 +.015 -.010 (9.65 +0.38 -0.25)				RoHS Compliant Gold Plated over Nickel Barrier Termination		
100E	MS	 Microstrip			.380 ±0.10 (9.65 ±0.25)		.170 (4.32) max.	High Purity Silver Leads $L_L = .750$ (19.05) min. $W_L = .350 \pm 0.010$ (8.89 ±0.25) $T_L = .010 \pm 0.005$ (0.25 ±0.13) Leads are Attached with High Temperature Solder.		
100E	AR	 Axial Ribbon						.380 +.035 -.010 (9.65 +0.89 -0.25)	N/A	Silver-plated Copper Leads Dia. = $.032 \pm 0.002$ (.813 ±.051) $L_L = 2.25$ (57.2) min.
100E	AW	 Axial Wire								Silver-plated Copper Leads Dia. = $.032 \pm 0.002$ (.813 ±.051) $L_L = 1.0$ (25.4) min.
100E	RW	 Radial Wire								

Custom lead styles and lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
+1-631-622-4700 • sales@atceramics.com

ATC Europe
+46 8 6800410 • sales@atceramics-europe.com

ATC Asia
+86-755-2396-8759 • sales@atceramics-asia.com

ATC 100 E Capacitors: Non-Magnetic Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS				
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS			
100E	WN	E Non-Mag Solder Plate		.380 +.015 -.010 (9.65 +0.38 -0.25)			.040 (1.02) max.	Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination			
100E	PN	E Non-Mag Pellet		.380 +.040 -.010 (9.65 +1.02 -0.25)				Heavy Tin/Lead Coated, over Non-Magnetic Barrier Termination			
100E	TN	E Non-Mag Solderable Barrier		.380 +.015 -.010 (9.65 +0.38 -0.25)				RoHS Compliant Tin Plated over Non-Magnetic Barrier Termination			
100E	MN	E Non-Mag Microstrip		.380 +.015 -.010 (9.65 +0.38 -0.25)	.380 +.015 -.010 (9.65 +0.38 -0.25)	.170 (4.32) max.	N/A	High Purity Silver Leads $L_L = .750$ (19.05) min. $W_L = .350 \pm .010$ (8.89 \pm 0.25) $T_L = .010 \pm .005$ (0.25 \pm 0.13) Leads are Attached with High Temperature Solder.			
100E	AN	Non-Mag Axial Ribbon						.380 +.035 -.010 (9.65 +0.89 -0.25)	.380 +.035 -.010 (9.65 +0.89 -0.25)	.380 +.035 -.010 (9.65 +0.89 -0.25)	Silver-plated Copper Leads Dia. = .032 \pm .002 (.813 \pm .051) $L_L = 2.25$ (57.2) min.
100E	BN	Non-Mag Axial Wire									.380 +.035 -.010 (9.65 +0.89 -0.25)
100E	RN	Non-Mag Radial Wire									

Custom lead styles and lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.

Suggested Mounting Pad Dimensions

Horizontal Electrode Orientation

Vertical Electrode Orientation

Case E

	Pad Size	A Min.	B Min.	C Min.	D Min.
Vertical Mount	Normal	.185	.050	.325	.425
	High Density	.165	.030	.325	.385
Horizontal Mount	Normal	.405	.050	.325	.425
	High Density	.385	.030	.325	.385





A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
+1-631-622-4700 • sales@atceramics.com

ATC Europe
+46 8 6800410 • sales@atceramics-europe.com

ATC Asia
+86-755-2396-8759 • sales@atceramics-asia.com

ATC 100 E Performance Data

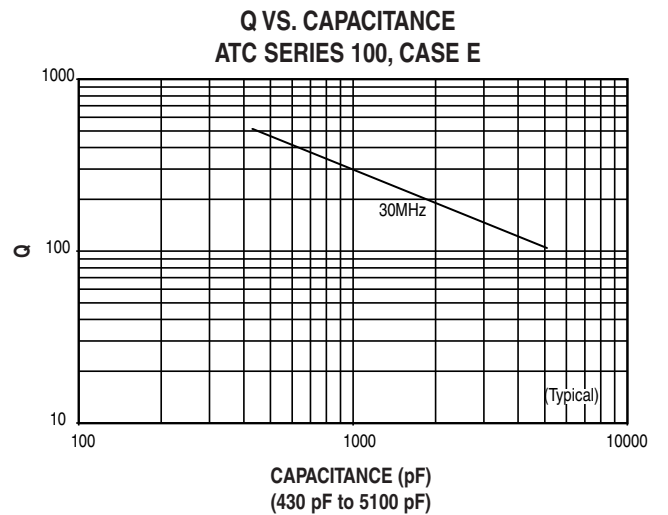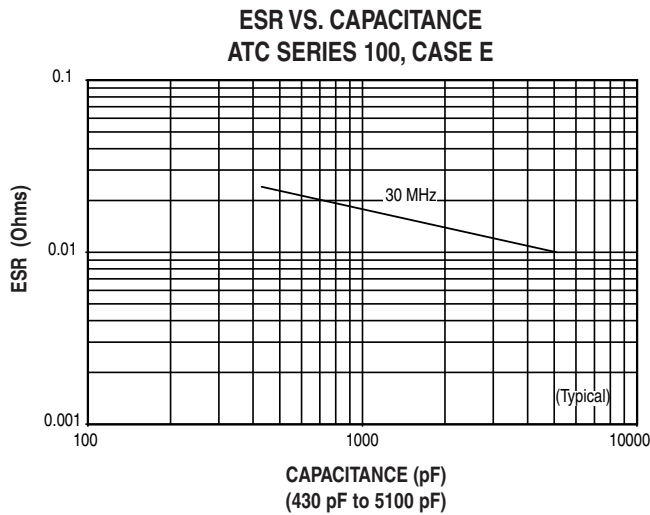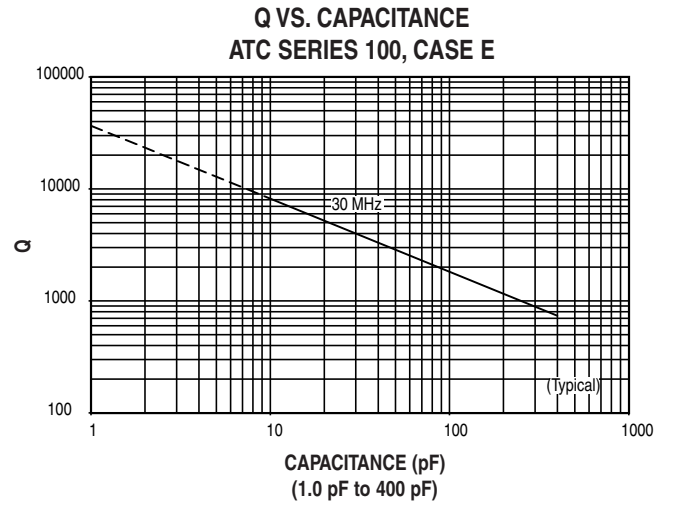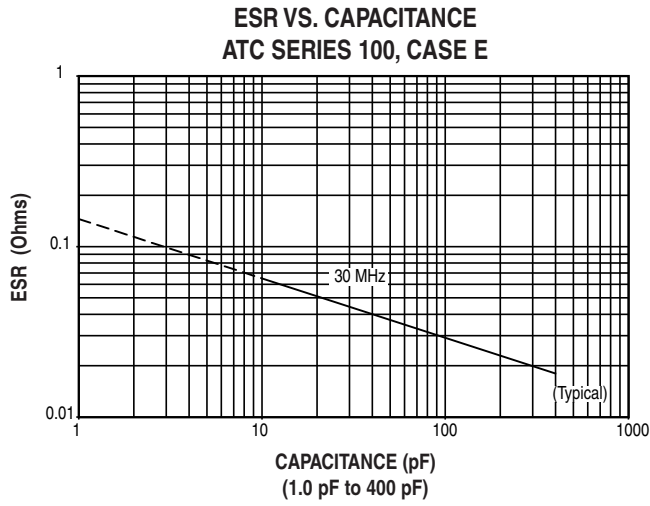

A M E R I C A N T E C H N I C A L C E R A M I C S


ATC North America
+1-631-622-4700 • sales@atceramics.com

ATC Europe
+46 8 6800410 • sales@atceramics-europe.com


ATC Asia
+86-755-2396-8759 • sales@atceramics-asia.com

ATC 100 E Performance Data


**SERIES RESONANCE VS. CAPACITANCE
ATC SERIES 100, CASE E**

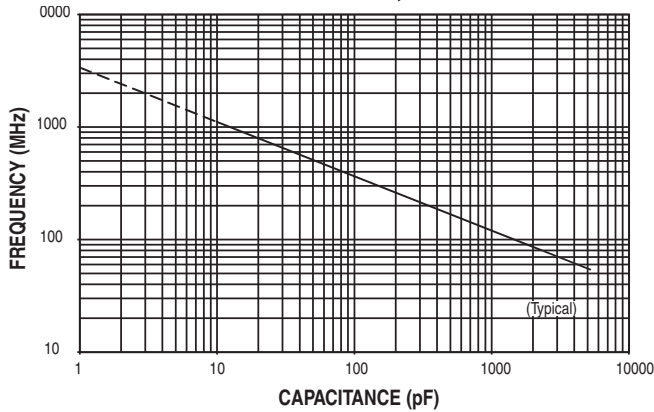


**CAPACITANCE CHANGE VS. TEMPERATURE
ATC SERIES 100, CASE E**

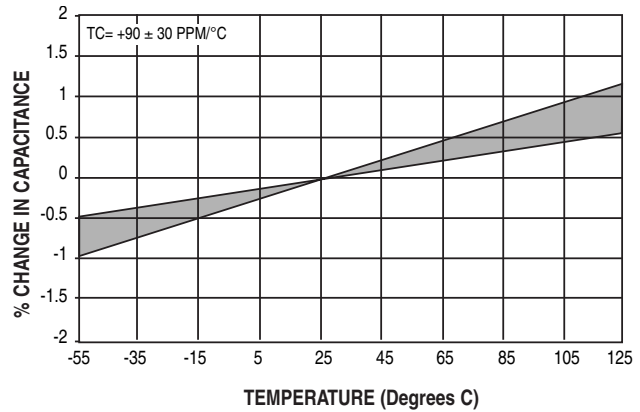


**CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE E**

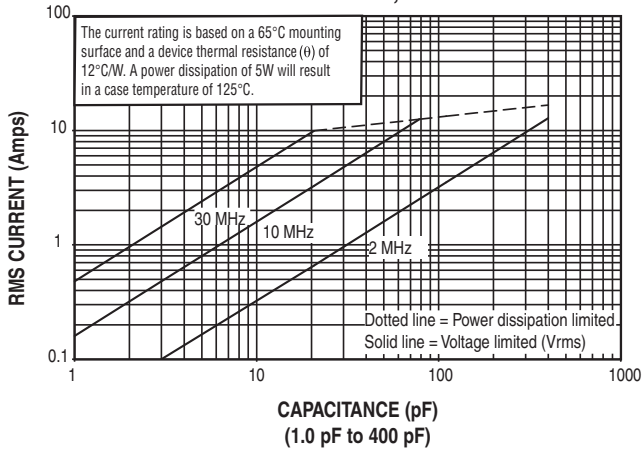

**CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE E**

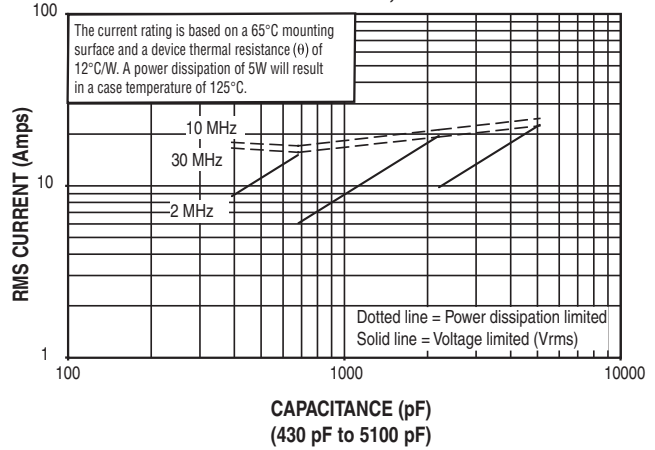

**CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE E, EXTENDED VOLTAGE**

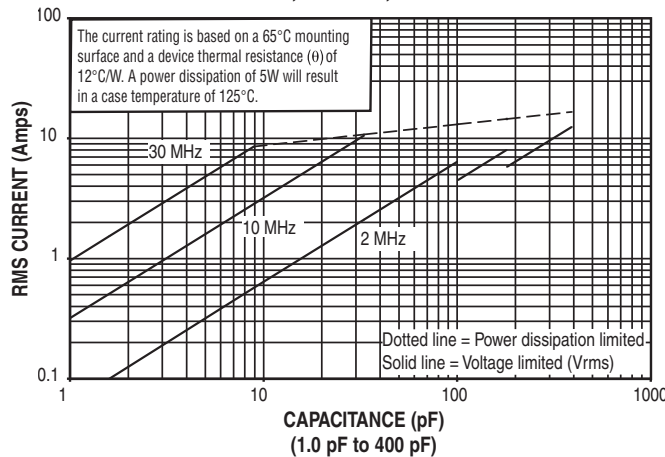

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B; 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 1996 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-809 Rev. K 3/10



AMERICAN TECHNICAL CERAMICS

ATC North America
+1-631-622-4700
sales@atceramics.com

ATC Europe
+46 8 6800410
sales@atceramics-europe.com

ATC Asia
+86-755-2386-8759
sales@atceramics-asia.com



www.atceramics.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multilayer Ceramic Capacitors MLCC - Leaded](#) category:

Click to view products by [American Technical Ceramics](#) manufacturer:

Other Similar products are found below :

[010-007220-002REV A](#) [M39014/01-1210V](#) [M39014/01-1281V](#) [M39014/01-1335V](#) [M39014/01-1571V](#) [M39014/01-1578V](#) [M39014/01-1593](#)
[M39014/02-1265V](#) [M39014/02-1347](#) [M39014/02-1350](#) [M39014/02-1356VTR1](#) [M39014/22-0167](#) [M39014/22-0734](#) [87043-49](#) [Q52-DK](#)
[AR215F103K4RTR2-3323](#) [C0603C309C5GACTU-CUT-TAPE](#) [C410C221K1G5TATR](#) [C420C102J1G5TATR](#) [C430C104M1U5TATR](#)
[SL155C222MAB](#) [FK26X7R2E104KN006](#) [CCR06CG183GRV](#) [CFB1/2C101J](#) [CFB1/2C102J](#) [CN20C102K](#) [M39014/01-1317](#) [M39014/01-](#)
[1572V](#) [M39014/01-1594V](#) [M39014/02-1236](#) [M39014/02-1321V](#) [M39014/02-1345V](#) [M39014/22-0351](#) [M39014/22-0695](#) [M39014/220767](#)
[M39014/220788](#) [M39014/22-1005](#) [MA405E334MAA](#) [MD015A103KAB](#) [SL301E105MAB](#) [CCR05CG242FRV](#) [KTD101B684M32A0B00](#)
[CCR07CG473KR](#) [CCR05CG820JP](#) [TKC-TMC1206-05-1501-J??](#) [TKC-TMC1206-05-1801-J](#) [TKC-TMC1206-05-20R0-F](#) [TKC-](#)
[TMC1206-05-3901-J](#) [TKC-TMC1206-05-44R2-F](#) [TKC-TMC1206-05-4703-J??](#)