

Keyword:
 Standard Use and Stand-By

Model: SL-360

Performance Data **Size AA**
 (Typical values for batteries stored at 25°C for one year)


System	Li/SOCl ₂
Nominal voltage	3.6 V
Nominal capacity	2.4 Ah
Nominal current	2 mA
Max. continuous discharge current	20 mA
Anode surface area	14 cm ²
Lithium content	0.65 g
Weight	18 g
Volume	8.0 cm ³
Temperature range	-55...+85 °C

WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety



Typical Discharge Curves at +25°C

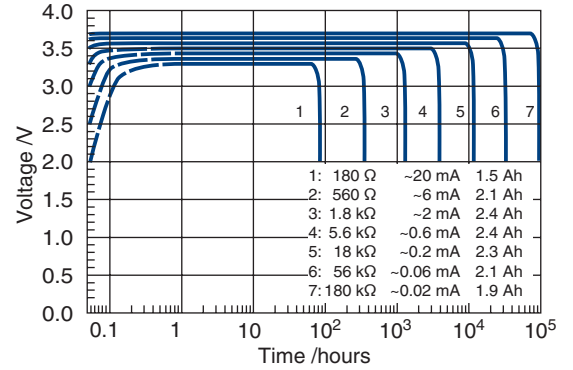

Available Capacity

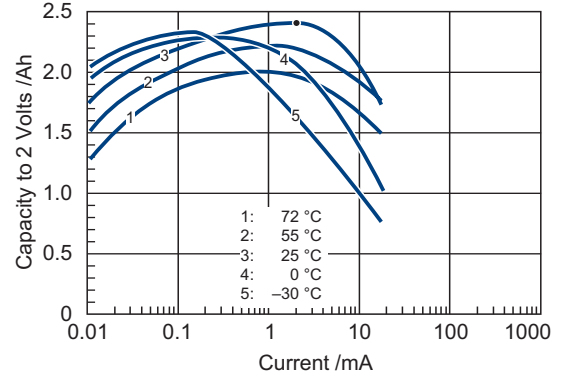

Operating Voltage

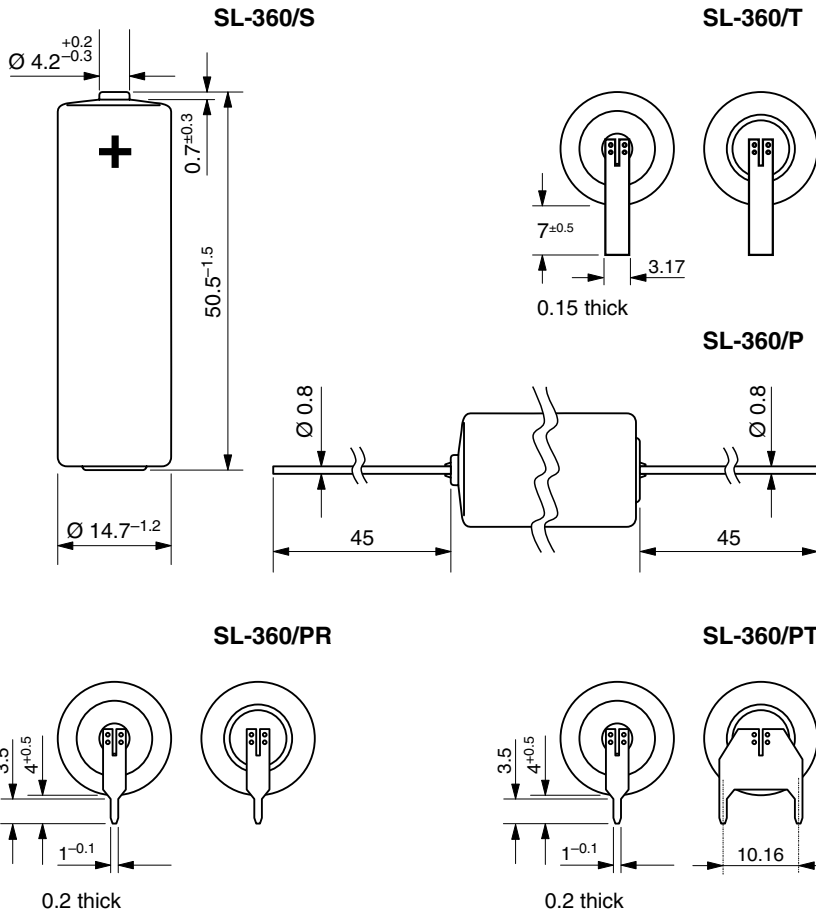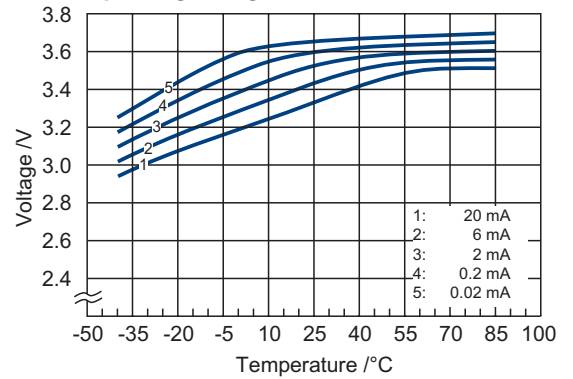

Available Terminations

SL-360/S	Standard
SL-360/T	Tags
SL-360/P	Pins
SL-360/PR	Pins Radial
SL-360/PT	Polarized Tags

Catalogue No.

11 1 03601 00
11 1 03602 00
11 1 03603 00
11 1 03606 00
11 1 03608 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [tadiran](#) manufacturer:

Other Similar products are found below :

[TL-5242](#) [TL-5104/SBP](#) [TL5902/T](#) [TL-5903/P](#) [TL-5930/F](#)