



**marathon**<sup>™</sup>  
Special Products

Product Data Sheet

**145X613**

Replace "x" with 1, 2, or 3 for number of poles

Power Terminal Block

## 475 Amps 600 Volts AC/DC

### Wire Range

- Line: (2) 3/8 - 16 X 1 7/16 studs
- Load: (1) 3/8 - 16 X 1 7/16 stud

### Electrical Ratings

- 475 Amps
- 600V per UL 1059 & CSA 22.2 No.158, Class B & C requirements
- SCCR of 10,000 A (default for terminal blocks).
- Factory & Field Wiring


### Agency Compliance

- UR - UL Recognized Terminal Block, Evaluated to UL 1059, File No.XCFR2.E62806
- CSA - certified to C22.2 No. 158, File No. LR19766 (Wire classes B & C only)
- CE compliant to IEC 60947-7-1

### Material Information

- Insulator base:
  - Phenolic
  - Flammability rating of insulator base UL94V0
  - Insulator base temperature rating: -40°C to 150°C (UL RTI)
- Connector: copper, tin plated
- Threaded stud: brass, tin plated
- Hex nut: brass, nickel plated
- Connector mounting screws: steel, zinc plated
- Spacer stud: nylon
- RoHS compliant

## Termination Specifications


Line & Load Side	Termination Type	Torque	Stud Length	Maximum Lug/Bar Width
	Listed lugs on 3/8 - 16 stud	21.7 N·m (192 lbf·in)	1 7/16" (37mm)	2.25" (57mm)

- For use with conductors prepared with listed connectors such as single hole compression/crimp lugs or listed ring, fork or spade terminals.
- Conductor size, ampacity, temperature rating and type are dictated by the ratings of the listed lugs utilized and applicable code requirements.
- Hex nut provided: 9/16 across flat.

## Installation & Accessories

- Mounting (Panel):
  - For use with 1/4 fastener.
  - Torque mounting fastener to 30-40 lbf·in (3.4 - 4.5 N·m).
- Covers:
  - Flat covers available upon request
  - Catalog Number: CH145x (replace "x" with number of poles)
  - Covers are clear polycarbonate
  - Accessory covers are not intended to provide insulation for electrical spacings.
- Marker Strip: white vinyl strip with mounting screws available.
- Printing options available, consult customer service for specifications.

**Drawing**

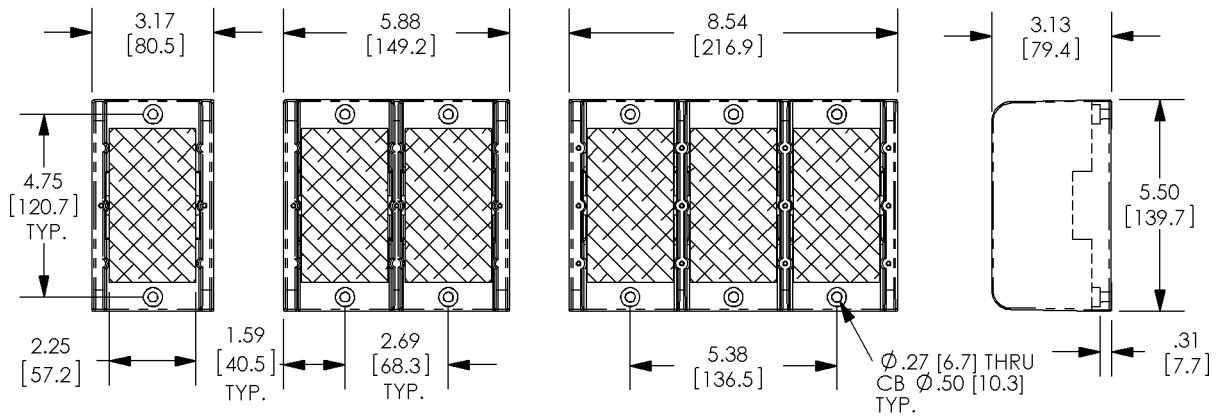

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [marathon manufacturer](#):*

Other Similar products are found below :

[104](#) [599-GP-2004-10](#) [600-2004-3-SP](#) [600-GP-20](#) [600TS-10](#) [601-GP-2102-02](#) [601-GP-3/4ST-12](#) [601-GPYSY-03](#) [602-GPYSY-22](#) [603-2302-04](#) [603-JJ-04](#) [603-JJ-07](#) [604-JJ-06](#) [605-GP-03SLB](#) [605-JJ-02](#) [651-XPR-13](#) [670-3/4ST-9](#) [670A-GP-3000-18](#) [670A-GP-3000-25](#) [670A-GP-3000-27](#) [670A-GP-3/4ST-10](#) [670-GP-19](#) [CW205-01C](#) [671-RZ-25](#) [672-GPY-05](#) [672-RZ-24](#) [699-GP-2102-08](#) [699-GP-2120-12](#) [6F30A3S](#) [6H38-TSKK-C](#) [6R30A3SP](#) [F600A1B](#) [F600A3B](#) [F60A1B](#) [799-6-KT28](#) [799-7-KT28](#) [FPB33588](#) [8TBJ02](#) [R30A1B](#) [RF400A3B](#) [1321970](#) [1322970CH](#) [1320972](#) [1331955](#) [1332270](#) [1332554CH](#) [1333280CH](#) [1333575CH](#) [1353701](#) [1353701CH](#)