

T&B Cable Ties®



Low profile contoured head compared with the profile of the traditional T&B® Cable Tie.

Low-Profile Cable Ties

This fastener design from Thomas & Betts is ideal for use where precision bundling is required and clearance is a necessity. A unique saddle back design curves to form a snug fit around the bundle, and allows for easy pull-through in bulkheads and any other tight spaces. Our contoured head eliminates snagging and sharp edges are reduced by our safe-guard walls.

Features


- Low-profile, contoured head reduces clearance required for the bundle and enhances the appearance of your harness
- The safe-guard wall eliminates exposure to sharp edges
- The saddle back fits snug against the contour of the wiring harness
- Sizes and colours available to accommodate varying requirements
- High-quality nylon strength

Cat. No.	Bundle Range Dia.		Tie Length		Strap Width		Strap Thick		Tensile Strength		Std. Pkg.	Bulk Pkg.
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	lb.	kg		
Cable Ties Ordering Information												
SF100-18	0.125 - 1.00	3.17 - 25.4	4.65	118.11	0.95	2.41	0.043	1.09	18	8.16	100	1,000
SF150-18	0.125 - 1.50	3.17 - 38.1	6.45	163.83								
SF200-18	0.125 - 2.00	3.17 - 50.8	8.10	205.74								
SF175-50	0.187 - 1.75	4.74 - 44.4	7.70	195.58	0.187	4.74	0.48	1.21	50	22.68		
SF300-50	0.187 - 3.00	4.74 - 76.2	11.33	287.78			0.52	1.32				
SF400-50	0.187 - 4.00	4.74 - 101.6	14.53	369.06	0.300	7.62	0.75	1.90	120	54.43		
SF600-120	0.375 - 6.00	9.52 - 152.4	21.00	533.40								
ERG120	Application tool for 50 lb. to 120 lb. tensile strength											
ERG50	Application tool for 18 lb. to 50 lb. tensile strength											

Material: Natural Nylon 6/6 in accordance with ASTM D4066 PA111. Also available in black outdoor weatherable (suffix "-X").
 Dimensions: Designed according to military standards (MS3367) except for the head length, which is slightly larger than MIL spec.
 Packaging: Standard package is 100 pieces.

Colour	Suffix No.
How to Order Colour Cable Ties	
Black (outdoor)	X
Brown	1
Red	2
Orange	3
Yellow	4
Green	5
Blue	6
Purple	7
Grey	8
White	9

Packaged for handling convenience.
 Natural nylon is standard. For coloured cable ties in-line fasteners add the following suffix numbers to catalogue numbers.
 Example: **SF175-50-2** (Red)
 For Distributor Packs (100), add suffix "-100".
 Example: **SF175-50-100**
 (Consult your Regional Sales Office for ordering information)

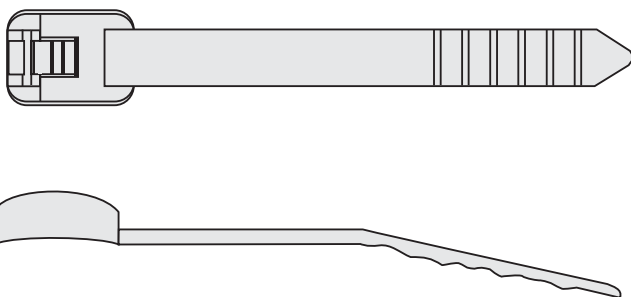

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wire Identification category](#):

Click to view products by [ABB manufacturer](#):

Other Similar products are found below :

[CU6337-000](#) [CU6342-000](#) [FCA-410-12](#) [11631010](#) [1-1768037-1](#) [1-1768037-2](#) [1-1768050-0](#) [PXLK-VI](#) [Q62184-1](#) [A64304-000](#) [QMT221](#)
[HK032WE1NF038B](#) [1330-0519-10](#) [1395199-1](#) [1395200-1](#) [1395202-1](#) [DMVF050WE-300S6](#) [D-SCE-1K-2.4-50-4-CS7834](#) [1538738-1](#)
[E90935-000](#) [EC1238-000](#) [EC1465-000](#) [EC1855-000](#) [EC1859-000](#) [EC1863-000](#) [EC5415-000](#) [EC7277-000](#) [EC7352-000](#) [EC7603-000](#)
[EC7707-000](#) [EC7735-000](#) [EC7768-000](#) [EC7828-000](#) [EC7854-000](#) [EC7952-000](#) [EC8128-000](#) [1768037-8](#) [1768041-7](#) [NC-127191-10-9](#)
[HS048WE2NF038B](#) [C03232-000](#) [HTCM-SCE-14-4H-9](#) [HTMS-3/16-9](#) [HT-SCE-1/4-2.0-4](#) [HT-SCE-3/16-2.0-4](#) [HTTMS-1/2-1.50-9](#) [HTTMS-](#)
[CM-1/2-4H-9](#) [HX-SCE-19.0-50-9](#) [HX-SCE-6.4-50-4](#) [C25254-000](#)