


Lead Lengths 40mm +5/-0mm

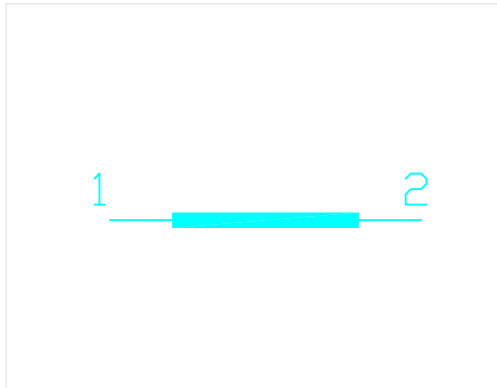

**TOR**

PART No	T68-40A	AL 47
SIZE (OD/ID/Ht)	17.5/9.4/6.35	
COATING	NA	
MATERIAL	IRON POWDER	
K VALUE	NA	

**Cu Wire**


PART No	COP207	WEIGHT (g) 4.5
SIZE (Dia)	0.28	
COATING	SOL 2	
COAT MATERIAL	NA	

**Winding**

No Turns	292
No Layers	CONTINUOUS
No Strands	ONE
Direction	AS PER SKETCH

TEST	Nom	Tolerance	Min	Max
Inductance (mH)	4	+20/-20%	3.2	4.8
Res (Ohm)	1.8	+15/-15%	1.53	2.07
Hi Pot (V AC)	NA			

ALL DIMENSIONS IN MM / ANGLES IN DECIMAL DEGREES



**ROXBURGH ELECTRONICS LTD**

**TITLE ASSEMBLY FOR SF1120**

**DrgNo SF1120-CHK**

**ISSUE 2**

**PROCUREMENT SPECIFICATION FOR SF1120-CHK**

**CUSTOMER REFERENCE**

Sheet 1 of 1 | Aprvd Date 15/08/00 | Aprvd By JRT | Drwn by BFS | SCALE NTS | CNN--- | Location N: \DWG\PS\CHK\CHK00094

© ROXBURGH ELECTRONICS LTD, FOXHILLS INDUSTRIAL PARK, SCUNTHORPE, NORTH LINCOLNSHIRE, DN15 8QJ TEL +44 1724 281770 F +44 1724 270230

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [roxburgh](#) manufacturer:*

Other Similar products are found below :

[RES20F06](#) [RES90F10](#) [KMF3100](#) [RIS0622H2](#) [XE12001](#) [SF1121](#) [RES5-FO8](#) [DRF10](#) [CMV10](#) [DVS24](#) [C225](#) [RES20F16](#) [RES20F10](#)  
[DVS240](#) [XEB01010](#) [DRF08](#) [RES5-F15](#) [RIP0642H2](#) [DRF06](#) [C215](#) [RES10F06](#) [RES30F03](#) [XE0475](#) [RID-0342-H](#) [RES5-F10](#) [RIR-0622-H](#)  
[XE01010](#) [SMV20](#) [SF1123](#) [CMV30](#) [RIR-0222-H](#) [SF1122](#) [SMV40](#) [RIQ-0442-H2](#) [RX730RC+CLIP](#) [SMV10](#) [3CRH30330](#) [CMV20](#) [XE1201](#)  
[RE1201](#)