SEM1000 LOOP ISOLATOR

>	Loop Powered		
>	(4 to 20) mA Output		
>	Galvanic Isolation 500 V DC Flash Tested 1 KV		
>	High Accuracy 0.05%		
>	12.5 mm Wide		



INTRODUCTION

The SEM1000 isolator is designed to be series connected into a new or existing (4 to 20) mA current loop and provide an isolated (4 to 20) mA signal capable of driving into 300 Ω maximum load. The output is powered from the input loop.

This isolator requires no user adjustment during commissioning. Minor adjustments can be made to the calibration of the device by means of the two front panel accessible calibration potentiometers.

Incorrect connection in the loop will not damage the device as long as the specified maximum currents/voltages are not exceeded.


SPECIFICATIONS @ 20 °C **MECHANICAL DETAILS** INPUT Current input 2 wire Loop powered Type Range (4 to 20) mA (30 mA MAX) Connection Captive clamp screws Protection Reverse connection Cable Size Maximum 4 mm sq solid / 2.5 mm sq stranded Voltage Drop 5.0 V typical, 5.5 V Maximum Case Material Grey Polyamide (Plus output load) 5.5 + (load * 0.02) To UL94-VO VDE 0304 Part 3, Level IIIA Flammability Max Loop Supply 35 Volts Dimensions (60 x 60 x 12.5) mm (67.5 above rail) OUTPUT Type (4 to 20) mA source (Powered from Mounting Snap on "top hat" rail (DIN EN 50022-35) input) 0 to 300 R Load (Open circuit limits at approximately 15'V) (All dimensions in mm) GENERAL SPECIFICATION ØØ 500 V DC (flash tested @ 1 kV) Isolation (Isolation method, opto coupler / transformer) BS EN61010-1 POLLUTION DEGREE 2; **Electrical Safety** 60 INSTALLATION CAT II ; CLASS I Ambient (0 to 70) °C ; (10 to 95) % RH non condensing 0.05 % full range output Accuracy 0.01 % / °C Stability Response Time Less than 100 mS to reach 63 % of final value. 60 EMC Tested to BS EN 61326 12.5 Adjustments Zero and Span Adjustment




PROCESS SIGNAL ISOLATORS

APPLICATIONS


SEM1000

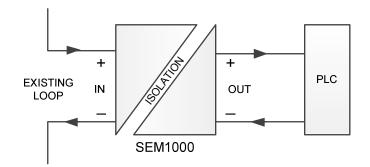

SEM1000

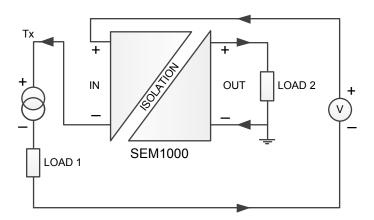

SCHEMATIC



ORDER CODE: SEM1000			

Status Instruments Ltd Green Lane Business Park Green Lane, Tewkesbury Gloucestershire, UK GL20 8DE Tel: +44 (0)1684 296818 Fax: +44 (0)1684 293746 Email: sales@status.co.uk Website: www.status.co.uk D2434-01-03 CN4956 SEM1000 Data Sheet



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for status manufacturer:

Other Similar products are found below :

 DM650PMBG001620
 DM650HMCB162000
 DM670/PM/1/3
 DM3600U/S1
 SEM1605/P
 SEM1605/TC
 DM650HMCA162000
 DM670/TM/J

 USB-CONFIG-MKII
 DM650HMBA001620
 SEM1630
 SEM1600F
 SEM1600VI
 SEM1000
 SEM206TC
 SEM1600B
 SEM206P