


General Purpose ELS -1100 Series Satisfies Most Applications

These polysulfone units are both compact and economical. They feature a variety of mountings, power requirements and electrical terminations to make it easy to find a perfect match for your application.

Specifications

Materials	
Housing and Prism	Polysulfone or Nylon
Operating Pressure	0 to 150 PSI, Maximum
Operating Temperature*	0°F to 176°F (-17.8°C +80°C)
Current Consumption	18 mA, Approximately
Output†	TTL/CMOS Compatible. Open Collector Output May Sink 40 mA UP TO 30 VDC.
Repeatability	±1 mm
EMI Susceptibility	Meets (MIL-STD-461B Part 2 Modified) Specification of 10 V/M for Frequency Range 30 to 1000 MHz (Except 609 MHz = 9 V/M and 679 MHz = 7.5 V/M).

* These switches are not for use in freezing liquid or steam/high condensation environments. Contact Gems for alternative solutions.

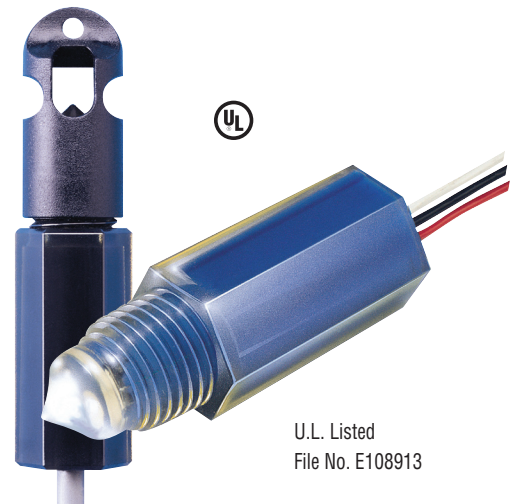

U.L. Listed
File No. E108913

LEVEL SWITCHES - SINGLE POINT

Dimensions

1/4" NPT Mounting	1/4" NPT Mounting with 3/8" Conduit	1/2" Straight Thread Mounting with O-Ring	M12x1-8g Straight Thread with O-Ring	"Fish" Pull Ring
Electrical Termination				
Lead Wires, 22 AWG, PVC Jacketed, 12" to 14" Extended				25' Cable, 22 AWG, PVC Jacketed

How To Order

Specify Part Number based on Mounting Type, Input Power and Output Condition required.

Input Power	Probe Condition at Current Sink	Mounting Type					
		1/4" NPT	1/4" NPT & 3/8" Conduit		1/2" Straight Thread	M12x1-8g Straight Thread	"Fish" Pull Ring
		Polysulfone	Polysulfone	Nylon	Polysulfone	Polysulfone	Polysulfone
5 VDC	Wet	138167 ⚡	144225	175631	144235	166541	—
10-28 VDC	Wet	142700 ⚡	143585 ⚡	157750	143580	169555	143577
	Dry	143570 ⚡	143590	175632	143575	169556	148973

⚡ - Stock Items.

Intrinsically-Safe Versions

GEMS ELS-1100 Switches may be rendered intrinsically-safe for Class I, Division 1, Group C & D when used with appropriate GEMS Zener Barriers. Call Gems Sensors for special ELS-1100-IS (intrinsically-safe) part numbers and Installation Bulletins 148745 and 148744, File No. E44570.

Extended Power and Switching Capabilities of 12 VDC Models with Gems.

Converts TTL output signal to 5 Amp relay output. Available as open circuit board or mounted in a NEMA 4X enclosure (pictured). See Page A-31.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [gems sensors manufacturer](#):

Other Similar products are found below :

[27051](#) [28196](#) [PS41-20-4MNB-C-FL18](#) [29608](#) [57143](#) [156268](#) [01750](#) [173250](#) [129660](#) [PS41-30-4MNB-C-HC](#) [42295](#) [01801](#) [165570](#) [35651](#)
[27A1D0](#) [173931-C](#) [70824](#) [160460](#) [106-P30 1A](#) [155481](#) [87480](#) [PS41-20-4MNB-C-HC](#) [26717](#) [164520](#) [142700](#) [79990](#) [01701](#) [70821](#) [22445](#)
[01755](#) [140620](#) [01950](#) [30288](#) [PS41-30-4MNB-C-FL18](#) [155421](#) [160450](#) [131100](#) [43765](#) [116826](#) [142505](#)