# Antimicrobial Switches - 1500 Standard & 1300 High Inrush





- Standard rocker switch
- Non-illuminated
- ▶ 1300 high inrush current
- Choice of switching circuits including 3 position
- Choice of bezel styles
- Choice of panel cut outs
- Matching indicator
- Single pole
- Splash resistant option
- BioCote antimicrobial option
- Panel cut out 'A' style: 27.3 x 12.3mm



1500 Series 16(4)A 250Vac T125

UL CSA 16A Non Ind 250Vac, (2 posn) 250Vac 1hp, 125Vac 1/2hp, (3 posn) 250Vac 1/2hp, 125Vac 1/4hp UL 10A 14Vdc 'T' (1500 and 1510 only) UL 85°C, file E45221, CSA file LR10990



AL A

10A 24Vdc

1300 series 16(6)A 250Vac T125 5E4 (50,000 Ops.) 150A Inrush to EN61058-1



UL CSA 20A 250Vac 1hp, 125Vac 1/2hp UL 85°C, file E45221, CSA file LR10990



st 20A 24Vdc



RoHS compliant




BioCote antimicrobial additive. Independently verified.


3mm contact gap except if marked  $\mu$ . Technical data on pages 4 & 5 (switches), 6 (indicators).

C 1300 A L--- B

TERMINAL FUNCTION ROCKER BODY PRINT, COLOUR, VOLTAGE ETC BioCote

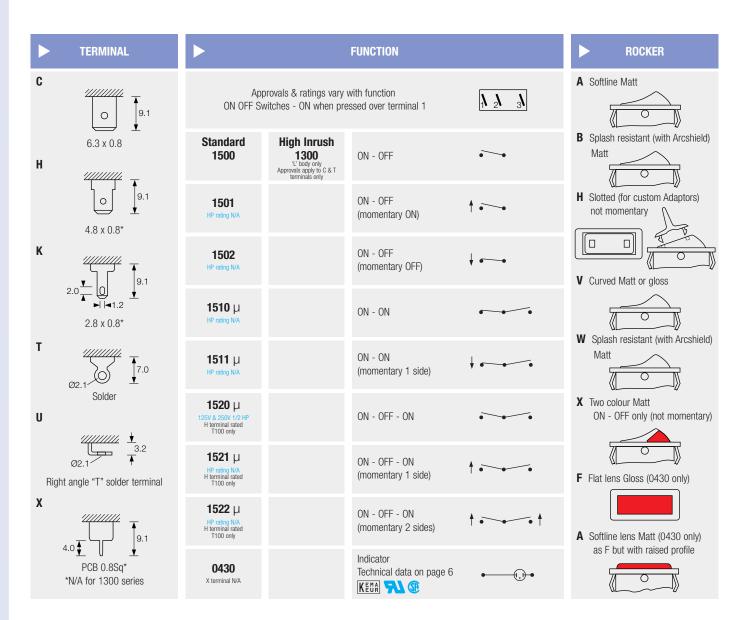

#### **Splash Resistant**













C1500XL ---













C0430AL ---

# Feather edge seals and a close fitting collar protect current carrying parts from moisture. B option has Hytrel collar/seals for enhanced protection.


1500 W and B splash resistant options

















#### OPTIONS

Finish Matt is standard.

**Colour** Call sales for custom colours. A full range is available for large orders.

**Legend printing** Select from the examples or call sales for custom legends.

Lamp voltage Call sales for details.

**Blanking plates A0434 - -** Dummy units to fill unused panel holes.

#### **Protective cover**

Snaps on to A, L, Q or T bodies (add G74 as a suffix). This reduces panel thickness by 1mm.



Panel sealing washer W46 is available for the same body sizes but reduces panel thickness by a further 0.8mm.


Covers are not suitable for momentary types.

### **BiCote Antimicrobial Additive**

Moulded components have antimicrobial properties using BioCote silver ion technology.

For all options call sales.

#### **DIMENSIONS** (mm)




#### **Panel thickness**

 $\begin{array}{lll} \mbox{A,Q} & \mbox{0.75 to 3.3mm} \\ \mbox{L,B,T} & \mbox{0.75 to 2.5mm} \\ \mbox{R} & \mbox{0.75 to 3.0mm} \end{array}$ 

\* For cut-out details on momentary switches call sales

#### 1300 High inrush, positive break switching

The 1300 series mechanism ensures contact welds formed at switch-on are positively separated by the plunger tube acting directly on the step in the moving contact.



#### **Examples of printing**







## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rocker Switches category:

Click to view products by Arcolectric manufacturer:

Other Similar products are found below:

VKD2GHNB-00000-000 VSD2GNNB-00000-000 6-1571986-5 6-1571986-9 632422-4B-KD 7036WWCDBX653+U622 8055K52Z7V

8138K20E6M50 FMC18A2200002 84206L 84312LX PREDD4-07F-BB0FW PREDD5-07F-BB0GW PRFDD1-16F-BB000 PRFDD3-16F-BB000 1-1634201-0 999-16702-001 A101J2ZQ004 A101J4ZQ004 A101J51CB0004 A107J51ZQ0004 A201J1AQ004 A201J1AV2Q004 A201J3ZB004 A201J50ZQ004 A203J51ZQ0004 A226L11YZQ A22L11A A435S1YZQ H8500XBBBBL-A H8653VBBG2577W

HB130CHNWWNAAC 1251.0303 AE205J60V3B004 RH110C2NBB 1352.0107 1363.0201 AML25GBF2AA03GR 1571099-3 1571987-4 1571987-5 1571989-7 B123J77V7B2 B226J50W4Q22P B433J37ZQ22M 160212E 1801.1164 1831.1102 1833.3402 1837.1118