

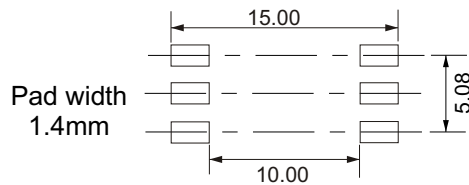


YY WW = date code
 YY = year of manufacture
 WW = week of manufacture

Part number

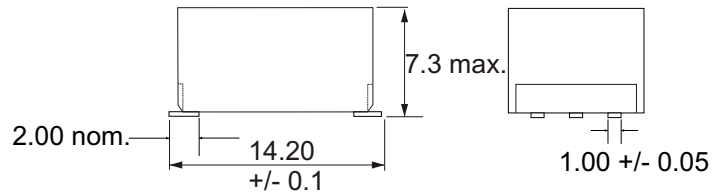

Suggested PCB layout

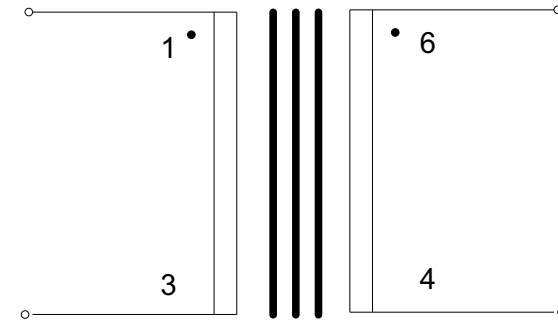

Electrical schematic


Electrical specification:

Ratio: 1 to 1
 DC resistance (sum of windings): 191 - 258
 Impedance matching: 600 ohms to 600 ohms
 Inductance (270mVrms, 100Hz parallel) Pins 1 - 3: 3.6H min.
 Leakage inductance: (10mVrms, 200Hz series) pins 1 - 3: 4.1mH nom.
 Return loss: (ref. 600 ohms) 200 to 4kHz: -18dB min.
 Insertion loss: (ref. 600 ohms, 2kHz): 2dB max.
 (ref. 430 ohms, 2kHz): 4dB max.
 Frequency response: 200 - 4kHz: +/- 0.2dB
 Longitudinal balance: 200Hz - 4kHz: 80dB min.
 Turns ratio (@ 6kHz, 0.1Vrms), pins 1 - 3 & 6 - 4: 1.00 +/- 1%
 Distortion: 600Hz, 0dBm: -89dBm nom.
 Saturation: <10Vrms, 65V peak, 50Hz
 Hi-pot, primary to secondary: 5500VDC, 1mA for 2 seconds
 Operating temperature range: -20 to +85°C
 Storage temperature range: -40 to +125°C

Certified to EN60950-1: 2001

RoHS process compliant.

Note: Do not pass DC current through windings.



Walters Group Holdings Ltd.
 Unit 5, Oxonian Park, Langford Locks,
 Kidlington, Oxfordshire. OX5 1FP
 Tel: (01865) 855085 Fax: (01865) 855075
 Website: www.oep.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
Specification for OEP8000	1	29/04/04	CS		OEP8000
	8	13/01/10	CS		
	9	21/10/10	CS		
	10	24/04/12	CS		

Scale: 2 to 1

All dimensions in mm unless stated otherwise

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [oep](#) manufacturer:

Other Similar products are found below :

[016608F](#) [PT4](#) [E187B](#) [PT42E](#) [PT8](#) [TF048](#) [Z1604](#) [P1200](#)