

SERIES H13

- **FEATURES**
 - LOW PROFILE
 - TIGHT TOLERANCE AND STABILITY TO ± 10 PPM
 - WIDE FREQUENCY RANGE


- **SPECIFICATIONS**

FREQUENCY RANGE	6.00 MHz TO 100.00 MHz
MODE OF OSCILLATION	(6.00 TO 50.00 MHz) FUNDAMENTAL (40.00 TO 100.00 MHz) THIRD OVERTONE
FREQUENCY TOLERANCE AT 25°C	± 50 PPM MAXIMUM (± 10 PPM, ± 30 PPM AVAILABLE)
FREQUENCY STABILITY OVER TEMPERATURE	± 50 PPM MAXIMUM (± 10 PPM, ± 30 PPM AVAILABLE)
OPERATING TEMPERATURE RANGE	-10°C TO +60°C STANDARD -30°C TO +85°C EXTENDED
STORAGE TEMPERATURE RANGE	-40°C TO +85°C
AGING	± 5 PPM PER YEAR MAX.
LOAD CAPACITANCE	12 pF TO 32 pF OR SERIES
EQUIVALENT SERIES RESISTANCE (ESR)	SEE TABLE
SHUNT CAPACITANCE	7.0 pF MAXIMUM
DRIVE LEVEL	1 μ W TO 100 μ W
REFLOW CONDITIONS	260° C FOR 10 s MAX 2 REFLAWS MAX




FREQUENCY (FUND)	ESR (OHM) MAX	FREQUENCY (FUND)	ESR (OHM) MAX	FREQUENCY (3OT)	ESR (OHM) MAX
6.00	100	23.040	35	40.00	65
7.60	60	24.00	35	40.320	65
8.00	60	24.576	35	44.2368	65
10.00	60	27.00	35	52.416	65
12.288	60	28.00	35	56.448	65
14.31818	45	28.63636	35	66.667	65
14.7456	45	29.4912	35	70.00	65
15.00	45	32.00	35	80.00	65
15.360	45	36.00	35	90.00	65
16.00	35	40.00	35	92.00	65
16.9344	35	40.320	35	98.304	65
18.432	35	48.00	35	100.00	65
19.6608	35	49.152	35		
20.00	35	50.00	35		


- **SOLDER REFLOW PROFILE**

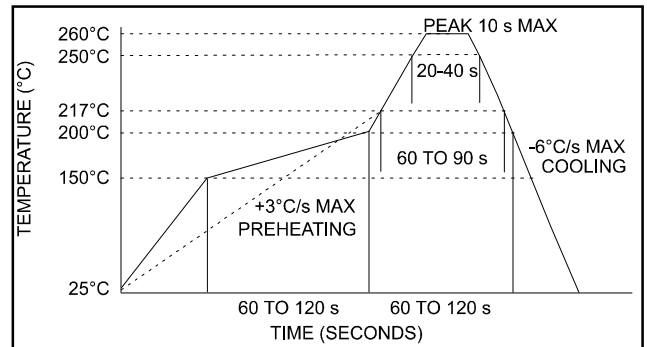

- **OUTLINE DRAWING**

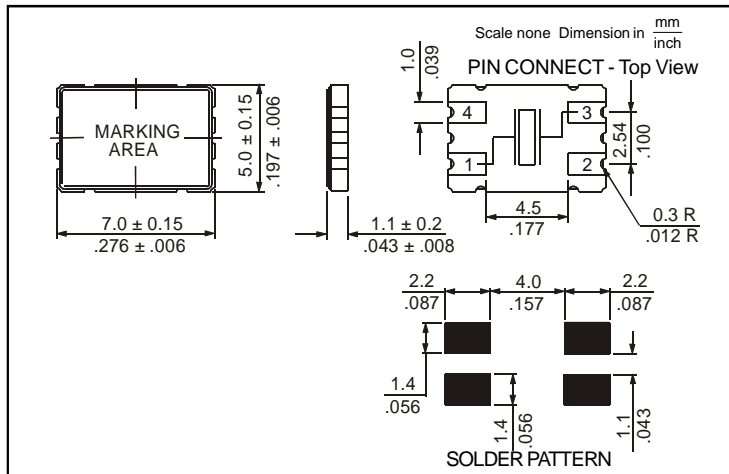

- **CARRIER TAPE DIMENSIONS**

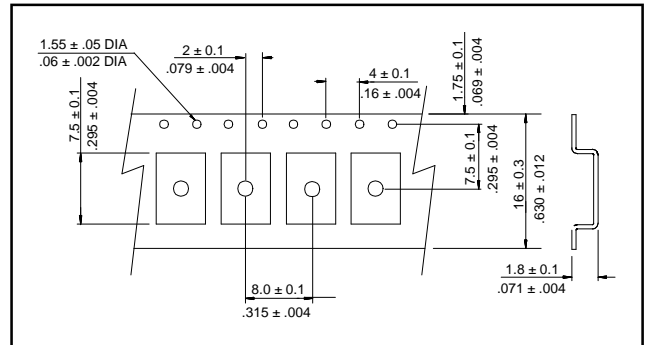

- **PACKAGING**

255mm REEL DIAMETER
16mm TAPE WIDTH, 8mm PITCH
QUANTITY: 1000 PIECES PER REEL

- **PART NUMBERING SYSTEM**

HOLDER TYPE	FREQUENCY	LOAD CAPACITANCE	MODE	TOLERANCE / STABILITY	EXTENDED TEMPERATURE	TAPE AND REEL
H13	IN MHz	12 TO 32 pF FOR PARALLEL S FOR SERIES	F 3OT FUNDAMENTAL THIRD OVERTONE	(PPM/PPM) EXAMPLES: 1030, 3030	EXT	TR

EXAMPLE: H13-32.000-18-1030-EXT-TR

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [raltron](#) manufacturer:

Other Similar products are found below :

[AS-24.576-18](#) [A-1.8432-18](#) [COM2305-25.000-EXT](#) [A-14.7456-18](#) [AS-4.000-20-SMD-TR](#) [RST-W2-P-N-E](#) [AS-27.000-18](#) [CO4605-125.000-EXT-T-TR](#) [CO2520-8.000-33-50-X](#) [CO4305-12.000-EXT](#) [AS-9.8304-18](#) [VC7250A-LZ-100](#) [RH100-10.000-18-3030-EXT](#) [H10S-25.000-18-F-3030-EXT](#) [CO4305-24.000-EXT-T-TR](#) [AS-14.31818-18](#) [H13-16.384-18-F-3030-EXT](#) [H13-24.000-18-F-3030-EXT](#) [R1612-27.120-8-F-3030-EXT](#) [RST-W1A4-17512-22M-H-001](#) [CO2016-10.000-3.3-50](#) [AS-12.000-18](#) [TU2045A-LZ-0.28-19.440-S3-3](#) [RH100-12.000-18-3030-EXT](#) [RST-MB-15338-22-G-001](#) [CO1100-32.000](#) [A-2.000-18](#) [AS-25.000-18](#) [H130B-24.000-18-3030-EXT](#) [CO43025-50.000-EXT-T-TR](#) [AS-4.000-18-SMD-TR](#) [RSE-32.768-12.5-C](#) [CE8450B-LZ-125.000-T-4](#) [AS-14.31818-18-SMD](#) [A-10.000-18](#) [AS-6.000-18](#) [A-24.000-18](#) [A-11.0592-18](#) [AS-12.000-20](#) [CO1100-10.000](#) [A-7.3728-18](#) [CO12100-16.000MHZ](#) [CO1100-7.3728](#) [CO1100-24.000](#) [A-2.4576-18](#) [AS-4.000-20](#) [AS-8.000-18](#) [AS-5.000-18-EXT-SMD-TR](#) [RPA-PB0-486392-1-G-001](#) [RPC-W2-P-35-70-G](#)