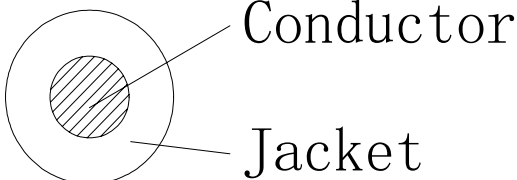


PAC

UL 1213 Cable (20 AWG) Specification

7/0.32 SPC

Part No.:P1213A20100

Cross Section		Performance	
		Electrical Characteristics:	
		Spark Test: AC-1.5KV Dielectric Strength : AC-500V/60sec Conductor Resistance: 37 OHM/KM At 20°C Insulation Resistance: DC-500V 10 Mohm/KM At 20°C	
Packing			
100M/reel			
Description			
Rated Temperature (°C)	-60~105		
Rated Voltage(V)	300		
Product Standard Certification	UL AWM Styles1213		
Flammability Test	FT1		
UL file Number	E300956		
Construction			
Conductor	Silver plated copper		
AWG	20		
Conductor Dia. (±0.005mm)	7/0.32		
Jacket	PTFE		
Average Thickness(mm)	0.25		
Outer Dia.(±0.05mm)	1.47		
Color		Mechanical Characteristics:	
As request		Test Object	Jacket
		Test Material	PTFE
		Before Tensile Strength (kgf/mm ²)	>=0.5
		Aging Elongation (%)	>=100
		Aging Condition ()	
		After Tensile Strength (%)	>=60
		Aging Elongation (%)	>=60
Marking			
E300956 兠 AWM 1213 20AWG 105 °C 300V PTFE VW-1 DONG GUAN HUA			
KUN ELECTRIC CO.,LTD C 兠 AWM 20AWG 105 °C 300V I A FT1 ROHS			
Revision History			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [pan-asia](#) manufacturer:

Other Similar products are found below :

[Pan-Asia](#)