

M12 Field Attachable Connectors (DUO)


RSC...DUO | RKC...DUO



Male, 4- and 5-Pole


Field attachable connector, M12 Duo male connector, 4- and 5-pole with threaded joint, for two cable connections, assembling with screw terminals.

RSC...DUO

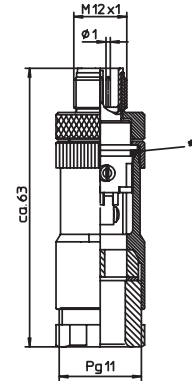

*a O-Ring

RKC...DUO



*a O-Ring




Female, 4- and 5-Pole

Field attachable connector, M12 Duo female connector, 4- and 5-pole with threaded joint, for two cable connections, assembling with screw terminals.


Pin Assignments

Face Views / M12, Male / Female

4 pole



5 pole





Be Certain with Belden

M12 Field Attachable Connectors (DUO)
RSC...DUO | RKC...DUO

Technical Data

Environmental

Degree of protection IP 67 / NEMA 6P
Operating temperature range -25°C (-13°F) / +90°C (+194°F)

Mechanical

Housing / Molded body PBT
Insert PBT
Contact CuZn, pre-coppered, CuSnZn
Receptacle shell CuZn, nickel plated
O-ring FKM
Mode of connection Screw terminals
Connectable conductor max. 0.75 mm²

Electrical

Contact resistance ≤ 5 mΩ
Nominal current at 40°C 4 A
Nominal voltage 4 poles 240 V
5 poles 60 V
Rated voltage 4 poles 250 V
5 poles 63 V
Test voltage 4 poles 2.0 kV eff. / 60 s
5 poles 1.5 kV eff. / 60 s
Insulation resistance > 10⁹ Ω
Pollution degree 3

Part Number		Pins	Cable Diameter Range	Characteristics
Male	Female			
RSC 4/DUO	RKC 4/DUO	4	2 x 3 mm / 2 x 5 mm	
RSC 5/DUO	RKC 5/DUO	5	2 x 3 mm / 2 x 5 mm	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [lumberg](#) manufacturer:

Other Similar products are found below :

[RK20-603/5M](#) [ASBSM 10/LED 3](#) [ASBS-R 8/LED 5-4](#) [ASBSV 8 5](#) [BTO 1 V ROT](#) [BTOR 1 SCHWARZ](#) [18315 0976 PMC 151](#) [KRE8](#) [SBS](#)
[4/LED 3](#) [SFV 80](#) [RK30/2M](#) [RKWT 4-07/5M](#) [ASBS-R 4 5-4](#) [ASBS-R 4/LED 5-4](#) [BTO 1 ROT](#) [BTO 1 SCHWARZ](#) [BTO 1 V SCHWARZ](#)
[BTOR 1 GELB](#) [BTOR 1 WEISS](#) [KB3](#) [KRES10](#) [KRESS8](#) [KS8](#) [KRM 07](#) [2480 01](#) [0103 03](#) [WKV 81](#) [RK 30-738/20F](#) [RKMV 4-225/10 M](#)
[RKT 5-644/2M](#) [RKT 4-679/5M](#) [HZ30](#) [ASBS 2 M12-S2326](#) [1614 16](#) [0985 706 100/10M](#) [RST 4-RKWT 4-602/1M](#) [WKV50](#) [RST 4-633/2M](#)
[RST 4-RKWT 4-602/3M](#) [RS-TU](#) [WSV 30](#) [0986 EMC 102](#) [0250 03](#) [RKWT 5-612/5M](#) [0980 ESL 393-121](#) [RST 5L-RKT 5L-949/5 M](#) [ASBM](#)
[6/LED 3-344/5 M](#) [RKT 4-646/2M](#) [RKHL 8/S 5,5](#) [0985 YM57530 100/20M](#)