


## 5mA test current Milliohm meter $1m\Omega$ -200 $\Omega$ 1% of range



#### Applications

- · Relay, switch and connector contacts
- PC-plated through holes
- PC track resistance
- Transformer and motor windings
- Ring circuit testing
- Earth conductor continuity
- Wire-wrapped and solder joints
- RFI shielding and coil resistance
- Network cabling
- Aircraft bonding check



One of the most important features of the milliohm meter is its low (5mA) test current. This ensures that the contact being tested is not 'cleaned' by the test current which can happen when higher test currents are used. This 'cleaning' of the contact under test leads to erroneous measurements.

The M210 set comprises; M210 milliohm meter, a set of spring clip connectors and leads, a leather case and an instructions leaflet.

• 0.1% accuracy

Only 5mA test current

Four terminal input


• Single push button operation

- Auto switch-off after three minutes
- 20 hours continuous operation (from standard PP3 battery)
- Complete with leather case
- Lightweight and portable


#### Specifications

• Auto-ranging

specifications	
Ranges	1.999Ω, 19.99Ω, 199.9Ω
Increments	0.001Ω, 0.01Ω, 0.1Ω
Accuracy	±0.1% of range
Zero offset	±0.001Ω
Maximum V	1.4V
Maximum A	5mA
Temperature drift	0.1%/ °C of lowest range
Display	31/2 digit L.C.D.
Battery	9V (PP3 MN1604 or equivalent)
Operating temperature	5°C to 35°C
Weight (including case and leads)	510gms
Dimensions (in case)	H:15cm, W:14.5cm, D:4.5cm
Dimensions (out of case)	H:15cm, W:8cm, D:3.8cm

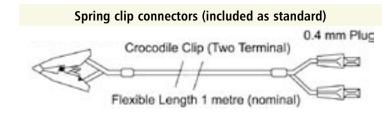

### Milliohm meter optional extras



### **Probe & contact connectors**

Part number	Order code
M210/9B Probe & contact connectors	H1Y92AQ

### M210/9A connectors

Part number	Order code
M210/9A Spring clip connectors	H1Y92AX

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Storage Boxes & Cases category:

Click to view products by Rhopoint manufacturer:

Other Similar products are found below :

 A812
 120Y
 120R
 DB613
 18090-2
 A221
 17800-2
 T221
 T600
 T824
 38803
 5712DP
 57/13512PK
 6777TF
 T1400
 V401
 SE230, BK
 T900

 3005C
 A101
 DB226
 DB216
 T4004
 T623
 T9100
 K801
 T5008
 DB211
 K818
 A208
 748-2
 A618
 50030
 6734PF
 T9501
 18192-2
 DB201

 6785TC
 T900BK
 A602
 A209
 5202CL
 T1408B
 1400
 PPK-29087
 6785TE
 SE520EM, BK
 SE520EM, GR
 SE52F, RD
 T200