



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE53000 thru NTE53004 Single Phase Bridge Rectifier 10 Amp

Features:

- Diffused Junction
- High Current Capability
- High Case Dielectric Strength
- High Surge Current Capability
- Ideal for Printed Circuit Board Applications

Maximum Ratings and Electrical Characteristics: ($T_A = +25^{\circ}\text{C}$ unless otherwise specified. Single Phase, Half Wave, 60Hz, Resistive or Inductive Load. For Capacitive Load, Derate Current by 20%)

Maximum DC Blocking Voltage, V_{RM}

NTE53000	200V
NTE53001	400V
NTE53002	600V
NTE53003	800V
NTE53004	1000V

Working Peak Reverse Voltage, V_{RWM}

NTE53000	200V
NTE53001	400V
NTE53002	600V
NTE53003	800V
NTE53004	1000V

Maximum Peak Recurrent Reverse Voltage, V_{RRM}

NTE53000	200V
NTE53001	400V
NTE53002	600V
NTE53003	800V
NTE53004	1000V

RMS Reverse Voltage, $V_{R(RMS)}$

NTE53000	140V
NTE53001	280V
NTE53002	420V
NTE53003	560V
NTE53004	700V

Thermal Energy (Rating for Fusing, $t < 8.3\text{ms}$, Note 1), I^2t 64 Amps²/Sec

Non-Repetitive Peak Forward Surge Current, I_{FSM}
 (Single Half-Sine Wave Superimposed on Rated Load, 8.3ms) 200A

Average Forward Rectified Current ($T_A = +50^{\circ}\text{C}$, Note 2), I_O 10A


Note 1. Non-repetitive, for $t > 1\text{ms}$ and $< 8.3\text{ms}$.

Note 2. Mounted on heatsink.

Maximum Ratings and Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified. Single Phase, Half Wave, 60Hz, Resistive or Inductive Load. For Capacitive Load, Derate Current by 20%)

Maximum Forward Voltage (Per Diode at 5A DC), V_{FM}	1.1V
Maximum Reverse Current (at Rated V_{RM}), I_{RM}	
$T_C = +25^\circ\text{C}$	10 μA
$T_C = +100^\circ\text{C}$	1mA
Typical Junction Capacitance (Note 3), C_J	110pF
Operating Junction Temperature Range, T_J	-65° to $+125^\circ\text{C}$
Storage Temperature Range, T_{stg}	-65° to $+120^\circ\text{C}$
Typical Thermal Resistance, Junction-to-Case (Per Diode), R_{thJC}	7.5K/W

Note 3. Measured at 1MHz and applied reverse voltage of 4VDC.

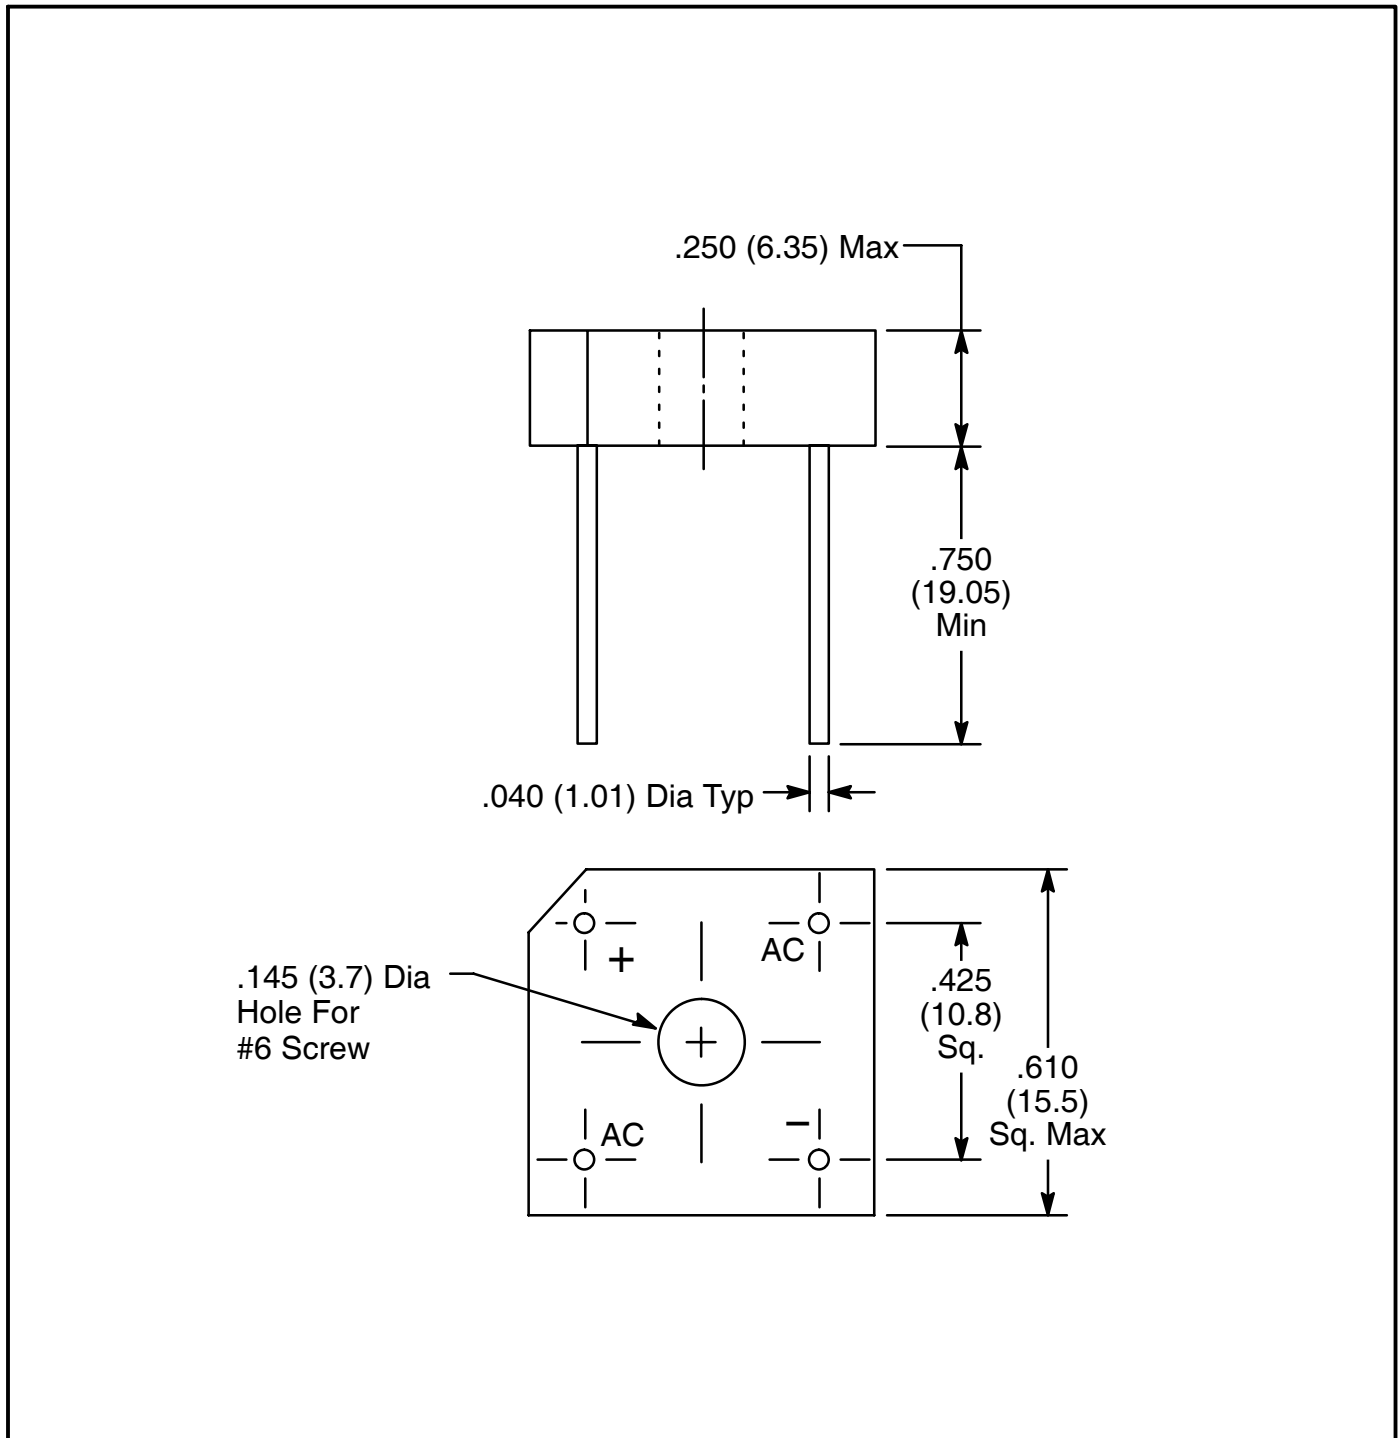

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[G3SBA60-E351](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF10SA-E345](#) [RMB2S](#) [RCG](#) [APT30DF100HJ](#) [APT60DF20HJ](#) [B2S-E3/80](#) [BU1506-E351](#) [BU15085S-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [RS404GL-BP](#) [RS405GL-BP](#) [G3SBA20-E3/51](#) [G5SBA20-E3/51](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBL02-E351](#) [GBL10-E3/45](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU4K-BP](#) [GBU8B-E3/45](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [MB1510](#) [MB352W](#) [MB6M-G](#) [B2M-E345](#) [B40C7000A](#) [B500C7000A](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BU1006-E345](#) [BU12065S-E3/45](#) [BU1508-E3/51](#) [BU2006-E3/45](#) [BU2008-E345](#)