

SUBCON...-SH

with one cable entry



(IEC)	rigid	flexible
[mm ²]	solid	stranded AWG

Connection data

Printed circuit terminal block 0.14-1.5 0.14-1.0 26-16

Description	Type	Order No.	Pcs. Pkt.
D-SUB plug connector with one cable entry	9 pos. socket	SUBCON 9/F-SH	27 61 49 9 1
	pin	SUBCON 9/M-SH	27 61 50 9 1
	15 pos. socket	SUBCON 15/F-SH	27 61 59 6 1
		SUBCON 15/M-SH	27 61 60 6 1
	25 pos. socket	SUBCON 25/F-SH	27 61 61 9 1
		SUBCON 25/M-SH	27 61 62 2 1

Accessories


Screw driver , blade: 0.4 x 2.5 x 75 mm, length: 150 mm	SZN/K	12 02 39 9	1
Optional fixing screws , short version (without knurl)	SUBCON-SHORTSCREW	27 99 69 4	20

Technical data

Plug connection	9-, 15- or 25-position D-SUB pin strip or socket strip
Max. voltage	60 V AC/DC
Current carrying capacity	1 A
Plug cycles	> 50
Cable diameter (max./min.)	10 mm/4 mm
Fixing screws/torque	4-40 UNC/0.4 Nm
Screw terminal blocks:	
Connection cross section (solid/stranded/AWG)	0.14-1.5 mm ² /0.14-1 mm ² /AWG 26-16
Torque	0.4 Nm
Temperature range	- 20 °C to + 75 °C
Material of housing	ABS-V0, metal-plated
Pin assignment	all 1 : 1

	A	B	C
9 pos.	44.5	36.0	56.4
15 pos.	44.5	44.3	64.7
25 pos.	49.5	58	78.7

Dimensional drawing

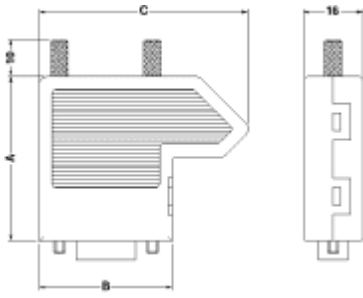

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [phoenix contact manufacturer](#):

Other Similar products are found below :

[1203259](#) [3240366](#) [1893300](#) [2800744](#) [2867076](#) [3006564](#) [2800741](#) [5146480](#) [1582539](#) [1623633](#) [1507793](#) [3025587](#) [3069708](#) [1582223](#)
[1431461](#) [1586976](#) [0311647](#) [1460160](#) [1771338](#) [3048387](#) [2814605](#) [0309086](#) [1513716](#) [3035684](#) [5451417](#) [0202219](#) [1647747](#) [1730667](#)
[1709267](#) [5449018](#) [0311634](#) [1730696](#) [3034057](#) [0311579](#) [1730683](#) [0719032](#) [5449843](#) [3240098](#) [0311566](#) [0201391](#) [CRIMPFOX 16 S](#)
[CRIMPFOX 25R](#) [CRIMPSET 25](#) [7001438](#) [ETD-BL-1T-F-300S](#) [MCR-1CLP-I-I-00](#) [MCR-4CLP-I-I-00](#) [MCR-DAC 8-I- 4-BUS](#) [FL EPA](#)
[WMS](#) [FLK 50/EZ-DR/ 400/KONFEK/S](#)