



No.390, Yong He Road,
Shanghai 200072, China

TECHNICAL DATA SHEET CABLE ASSEMBLY

PART NUMBER :R284C0351045

Issue : NA

Date : NA


Customer : **Radio Spares**

Specification : **NA**

Issue : **NA**

Date : **N/A**

All dimensions are in mm

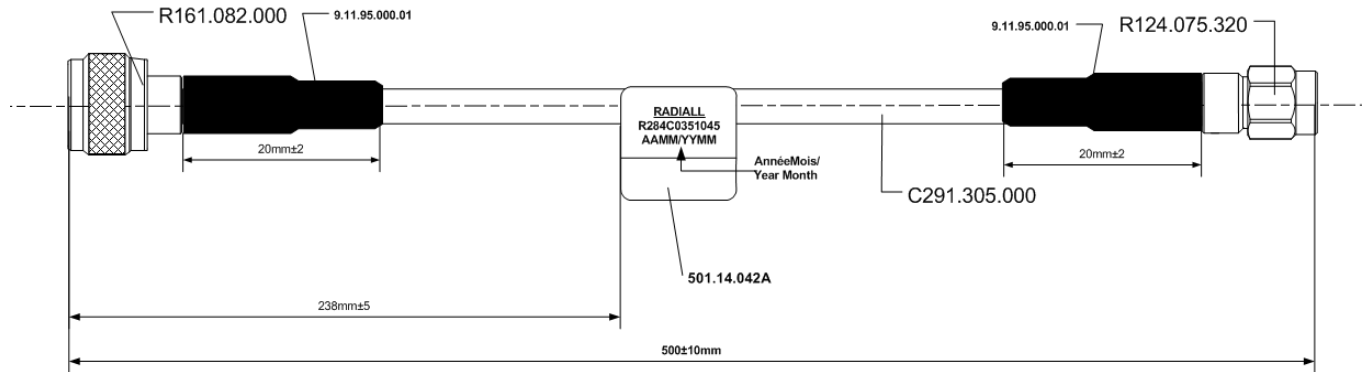

Connectors designation :

**Connector 1 : N Straight Plug Full Crimp Type
Cable 5/50 S (R161.082.000)**

**Connector 2 : SMA Straight Plug Crimp Type
Cable 5/50 S (R124.075.320)**

Cable designation :

**Flexible Cable 5/50S (RG58)
C291.305.000**

Nominal length :

Lg: 500 mm

Cable colour :

Black

Outer diameter :

4.95 mm

Accessories :

HearShrink Sleeves (9.11.95.000.01)

ELECTRICAL CHARACTERISTICS :

High Frequency

Characteristic impedance : **50±2 Ohms**

Frequency range : **DC-1GHz**

Insertion Loss : **0.55 dB max @ 1GHz & 20° C**

VSWR. : **TBT**

Low Frequency

Insulation Resistance : **5000 MOhms min**

Voltage Rating : **335 Veff max**

MECHANICAL CHARACTERISTICS :

Recommend min. bend radius : **20 mm**

Cable crush resistance : **NA**

Life (connectors) : **100 cycles**

ENVIRONMENTAL CHARACTERISTICS :

Operating temperature range : **-40° C to +85° C**

Remark : **NA**

Attachment : **R161.082.000-TDS , R124.075.320-TDS**

C291.305.000 (RG58)-TDS

Cable Assembly is RoHS compliant.

CUSTOMER'S APPROVAL

**Service or
Company's stamp**

**Name
Date**

Willy	A	2007-5-25	Creation	Garet Xie
Name	Issue	Date	Modification	Checked by



No.390, Yong He Road,
Shanghai 200072, China

TECHNICAL DATA SHEET CABLE ASSEMBLY

PART NUMBER :R284C0351046

Issue : NA

Date : NA


Customer : **Radio Spares**

Specification : **NA**

Issue : **NA**

Date : **N/A**

All dimensions are in mm

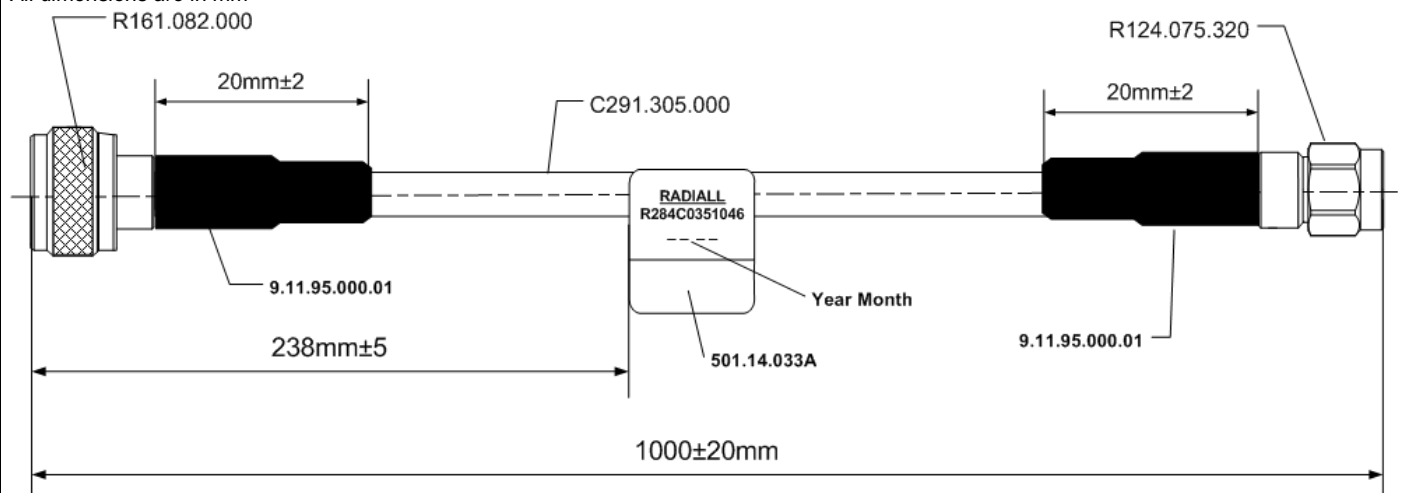

Connectors designation :

Connector 1 : N Straight Plug Full Crimp Type
Cable 5/50 S (R161.082.000)

Connector 2 : SMA Straight Plug Crimp Type
Cable 5/50 S (R124.075.320)

Cable designation :

Flexible Cable 5/50S (RG58)

C291.305.000

Lg: 1000 mm

Nominal length :

Cable colour :

Black

Outer diameter :

4.95 mm

Accessories :

Plastic Boots (9.11.95.000.01)

ELECTRICAL CHARACTERISTICS :

High Frequency

Characteristic impedance : **50±2 Ohms**

Frequency range : **DC-1GHz**

Insertion Loss : **1.01 dB max @ 1GHz & 20° C**

VSWR. : **TBT**

Low Frequency

Insulation Resistance : **5000 MOhms min**

Voltage Rating : **335 Veff max**

MECHANICAL CHARACTERISTICS :

Recommend min. bend radius : **20 mm**

Cable crush resistance : **NA**

Life (connectors) : **100 cycles**

ENVIRONMENTAL CHARACTERISTICS :

Operating temperature range : **-40° C to +85° C**

Remark : **NA**

Attachment : **R161.082.000-TDS , R124.075.320-TDS**

C291.305.000 (RG58)-TDS

Cable Assembly is RoHS compliant.

CUSTOMER'S APPROVAL

**Service or
Company's stamp**

**Name
Date**

Peter	A	2007-5-25	Creation	Willy
Name	Issue	Date	Modification	Checked by

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [radiall](#) manufacturer:

Other Similar products are found below :

[F760858219](#) [8959-1511-004](#) [5919-1503-000](#) [7101-1541-010](#) [7105-1561-010](#) [MD11-035](#) [81-6201-0450](#) [9074-9513-000](#) [9620-9003-151](#)
[R113425097](#) [R114305000W](#) [R124075210](#) [R125055000](#) [R125512000W](#) [R141154000W](#) [R141572000](#) [R143012000](#) [R143235161W](#)
[R166268000](#) [R176019000](#) [R191841001W](#) [R282102000](#) [R282744220](#) [R282918120](#) [R404770000](#) [R414430150](#) [R414520150](#) [R433514700](#)
[R570022105](#) [R570123005](#) [R570363010](#) [R570442000](#) [R570E52010](#) [R574402410](#) [R585423230](#) [R114425000](#) [R124510000](#) [R125052500](#)
[R125320020W](#) [R141331500W](#) [R162017000W](#) [R176404000](#) [R191970091](#) [R282120010](#) [R282750000](#) [R317270000](#) [R404110150](#)
[R404280150](#) [R404755000](#) [R413210150](#)