


Manufactured in UK

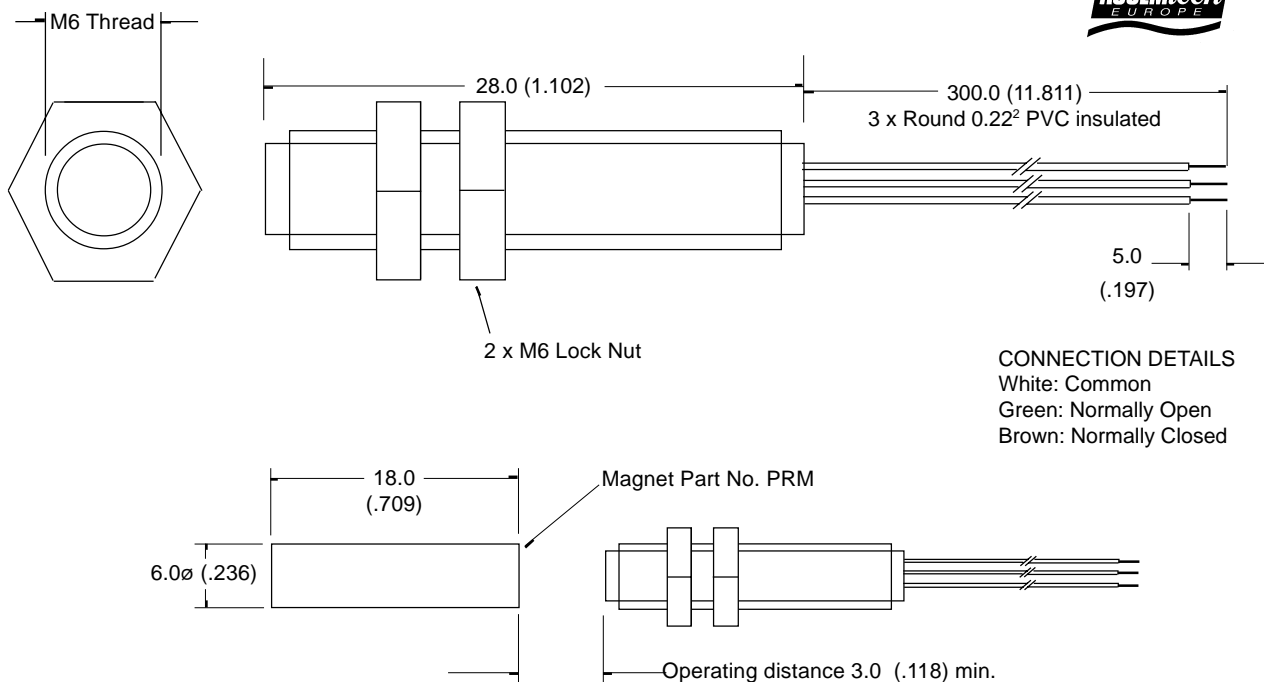

CONNECTION DETAILS  
 White: Common  
 Green: Normally Open  
 Brown: Normally Closed

Drawings not to scale  
 All dimensions in mm (inches) nominal

Different magnets will give varying operating distances.

## SPECIFICATION

CONTACT FORM/STYLE		Changeover
SWITCHING VOLTAGE	Max. Vac	130
SWITCHING CURRENT	Max. A	0.25
SWITCHING CAPACITY (RESISTIVE)	Max. VA	3.0
CONTACT RESISTANCE	Max. mΩ	150
SWITCHING DISTANCE	Min. mm	3.0
OPERATING TEMPERATURE		
CONTINUOUS	Deg. °C	-20° + 85°
INTERMITTENT	Deg. °C	-20° + 105°
STORAGE TEMPERATURE	Deg. °C	-20° + 90°
CASE MATERIAL		Brass-nickel plated

This product is fully sealed to give maximum mechanical protection and minimise the ingress of dust and moisture. As a guide, the product is expected to meet the requirements of IP65.

### PROXIMITY - Reed Switch - Cylindrical - Metal

PART NUMBER  
**PTC 130/30**

Rev. No.	Revision Note	Date	Signature
B	Web Site 2001	1-4-01	RG

The Comus Group of Companies consist of:  
 Assemtech Europe Limited  
 E. Bachem GmbH  
 Comus International  
 W. Gunther GmbH  
 Gunther Belgium  
 Gunther France  
 S.T.G.

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Proximity Sensors](#) category:*

*Click to view products by [Comus](#) manufacturer:*

Other Similar products are found below :

[01.001.5653.1](#) [70.340.1028.0](#) [70.360.2428.0](#) [70.364.4828.0](#) [70.810.1053.0](#) [72.360.1628.0](#) [73.363.6428.0](#) [9221350022](#) [980659-1](#) [QT-12](#)  
[E2EX10D1NN](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2EX2ME2N](#) [E2E-X3D1-N 10M](#) [E2E-X4MD1-G](#) [E2FMX1R5D12M](#) [E2K-F10MC1 5M](#)  
[EI1204TBOSL-6](#) [EI5515NPAP](#) [BSA-08-25-08](#) [IC08ANC15PO-K](#) [IMM2582C](#) [25.161.3253.0](#) [25.332.0653.1](#) [25.352.0653.0](#) [25.352.0753.0](#)  
[25.523.3253.0](#) [9151710023](#) [922FS1.5C-A4P-Z774](#) [SC606ABV0S30](#) [SM952A126100LE](#) [A1220EUA-T](#) [F3S-A162-U](#) [CL18](#) [QT-08L](#)  
[34.110.0010.0](#) [TL-C2MF1-M3-E4](#) [IA08BLF15NOM5](#) [IA08BSF15NOM5](#) [IA12ASF04DOM1](#) [IMM32188C](#) [IS2](#) [IS31SE5000-UTLS2-TR](#)  
[34.110.0021.0](#) [34.110.0022.0](#) [CA150-120VACDC](#) [VM18VA3000Q](#) [XS508BSCBL2](#) [XS512BLNAM12](#)