

SOLID PC 3828 13 G-2FSH




Sample photo

Order symbol: PC 3828 13 G-2FSH
Product nbr: 2539521
Description: Enclosure, PC
Remarks: Grey hinged cover

EAN: 6418074052742
EI. number:
 Finland: 3435730
 Sweden: 2539521
 Norway:

Including: Base with screws for mounting plate/DIN-rail, cover with PUR gasket and polyamide cover screws.

| Dimensions: | | Length | Width | Height | Rating: |
|-------------------------------|--|-------------------------|-------|--|--|
| mm: | | 378 | 278 | 130 | Ingress Protection (EN 60529): IP 65 |
| inch: | | 14.9 | 10.9 | 5.1 | Impact Resistance (EN 62262): IK 08/09 |
| Materials: | | | | | Electrical insulation: Totally insulated |
| Material: | | Polycarbonate | | Halogen free (DIN/VDE 0472, Part 815): Yes | |
| Base colour: | | RAL 7035 | | UV resistance: UL 508 | |
| Cover colour: | | RAL 7035 | | Flammability Rating (UL 746 C 5): UL 746C 5V | |
| Cover screws material: | | Polyamide | | Glow Wire Test (IEC 695-2-1) °C: 960 | |
| Cover screws colour: | | Grey | | UL Type: UL TYPE 1, 3, 3S, 12 | |
| Gasket material: | | Polyurethane | | | |
| Temperatures: | | | | | Certificates: |
| Short term: | | -40 ... 120 °C | | Underwriters Laboratories | |
| Continuous: | | -40 ... 80 °C | | Fimko | |
| Short term: | | -40 ... 250 °F | | Europe EN 62208: 2003 | |
| Continuous: | | -40 ... 175 °F | | UL Canada | |
| Accessories: | | | | | Gost R |
| EKPVT | | Mounting plate | | | |
| EKPXT | | Mounting plate Pertinax | | | |
| EKV 22 | | DIN-35 Mounting rail | | | |
| EKV 32 | | DIN-35 Mounting rail | | | |
| EKPZR | | Extension frame | | | |

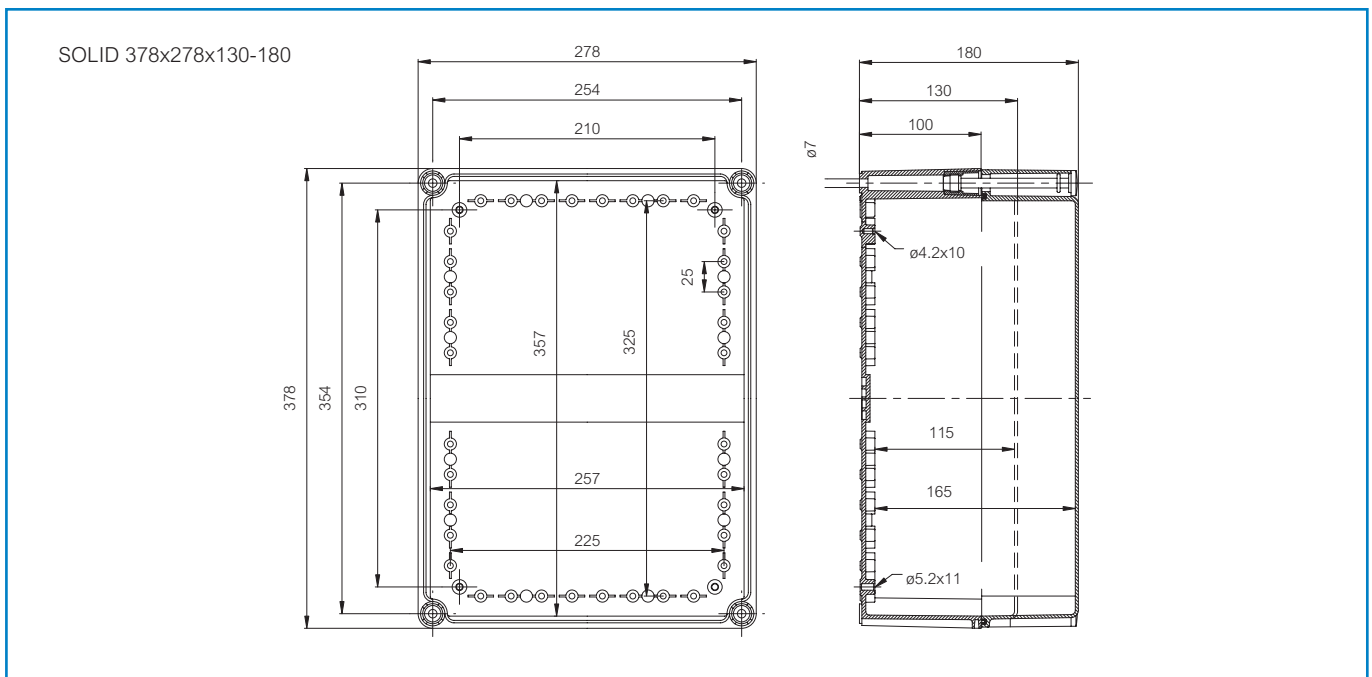

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [fibox](#) manufacturer:

Other Similar products are found below :

[MPS ARCA 5040](#) [PCM 175/75 T](#) [ABQ3 364015](#) [ABS 150/100 HG](#) [ABS 150/60 HG](#) [ABS 175/75 HG](#) [ABS F 65 G](#) [ARCA 403015](#) [EKMVT](#)
[CAB PC 303018 G3B](#) [9822003](#) [ABS 150/125 HG](#) [ABS 150/75 HG](#) [ABS 175/100HG](#) [ABS 95/75 HG](#) [ABS F 85 G](#) [PCT 081206](#) [ARCA](#)
[302015](#) [CAB PC 303018 T3B](#) [PC 5628 13 T](#) [TAM 090706 MC](#) [ARCA 406021](#) [MP 6040](#) [ARCA 405021](#) [ARCA 604021](#) [ARCA 806030](#)
[5330360](#) [EKOE 130 G](#) [2539543](#) [DRS ARCA 403015](#) [DRS ARCA 304021](#) [DRS ARCA 203015](#) [PC 100/125 HG](#) [PC 100/75 HT](#) [PC 300/150](#)
[ZG](#) [PCM 175/150 G](#) [PCM 125/100 G](#) [PC 125/125 HG](#) [ABS D 65 G](#) [7811130](#) [ARCA 403021N](#) [9822015](#) [7094220](#) [7094450](#) [PC 1919 13 T-](#)
[2FSH](#) [PC 200/150 HT](#) [PCM 175/100 T](#) [PCT 121210](#) [9821007](#) [EKPE 130 G ENCLOSURE](#)