

nominal voltage: 1,2V
max. charge voltage: 1,5V

capacity
 nominal : 1300mAh
 minimum: 1100mAh
 1050mAh

max. continuous discharge current: 3900mA

charge
 standard charge: 130mA
 quick charge 380mA
 fast charge: 1300mA

recommended charge
 termination control
 parameters:

trickle charge current:
 continuous overcharge:
 (less than 1 year)

internal resistance:

life expectancy:

ambient temperature range:

conditions
 at standard charge
 (0,1C / 20°C)
 discharge at 0,2C
 discharge at 0,2C
 discharge at 1C
 1,0V end discharge voltage
 ambient temperature 20°C

charge current
 130mA
 380mA
 1300mA

charge time
 16hrs at 20°C
 4hrs
 1,1hrs

-dV: 5...10mV
 dT/dt: 0,8...1°C per min
 TCO: 45...50°C

13...65mA (recommended)





<130mA no conspicuous deformation,
 no leakage

≤30mOhms at 1000Hz,
 battery fully charged

>500 cycles IEC standard

0...45°C
 10...40°C
 -20...60°C
 -20...35°C

standard charge
 fast charge
 discharge
 storage (less than 6 month)

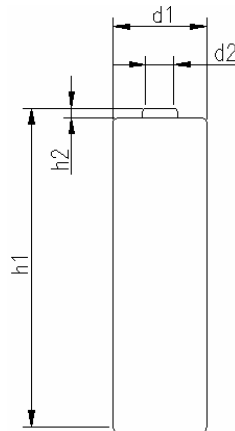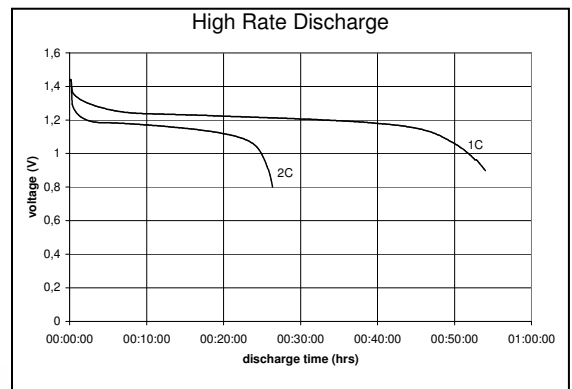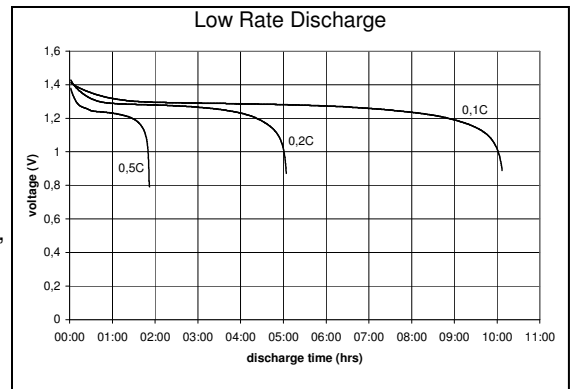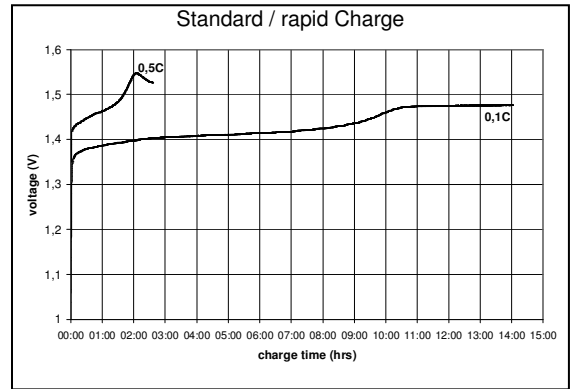

mechanical specifications

cell dimensions (with sleeve)
 diameter d1: 14,3 - 0,5mm
 diameter d2: 5,5 - 1,0mm
 height h1: 50,3 - 1,0mm
 height h2: 1,5 ± 0,5mm
 weight: approx. 24g

	specifications for model/type:	AA – NiMH 1300mAh
		4 pcs blister packing
	Ansmann drawing number / part number:	5030792
	author / date:	Gramlich / 25.07.2007

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ansmann](#) manufacturer:

Other Similar products are found below :

[5020012](#) [1000-0003](#) [5030992](#) [1520-0004](#) [1501-0004-1](#) [1250-0013](#) [1001-0020-UK](#) [2312-3003](#) [1600-0199](#) [5030902](#) [1600-0137](#) [1900-0019](#)
[1001-0014-UK](#) [5035362](#) [5707173](#) [5311113 / APS 1000](#) [5035391](#) [10950964/01](#) [5000023](#) [5030982](#) [1600-0138](#) [1250-0014](#) [BCA120-350](#)
[1600-0145](#) [5015293](#) [2311-3003](#) [5030802](#) [5035222](#) [5030912](#) [5016243](#) [2310-3001](#) [5030641](#) [5001183](#) [1600-0154](#) [5035352](#) [ACS310](#) [5035342](#)
[5035202](#) [5015332](#) [5015303](#) [5035201](#) [2311-3002](#)