

Voice Modules & Accessories

- Incorporate the KRONE LSA-PLUS® IDC Technique

- Available as Backmount Frame, surface or PCB mounted variants

- Simple to install using industry standard KRONE Insertion tool

- Easy 'tee-in' and 'bi-directional' look both ways testing without disrupting wiring

- Each contact accepts up to 2 wires of the same diameter


- Wide range of complementary accessories available

- Conform to OFTEL General Approval NS/G/23/L/100025


MODULES consist of two rows of contacts, one for permanent wiring, the other for jumper wires. The modules are available in four basic forms:




Connection Modules have a one piece contact providing a continuous link between permanent wiring and jumper wiring, giving provision for monitoring access and overvoltage protection.

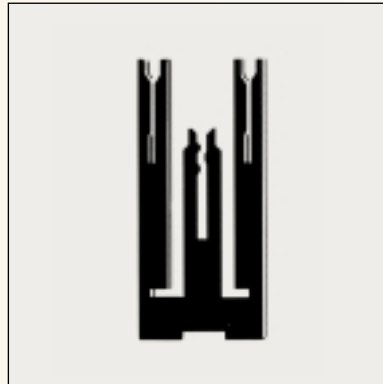


Disconnection Modules have two piece contacts normally closed, incorporating a disconnection facility. This gives all the features as above plus the added advantage of individual pair disconnection and four wire test access.

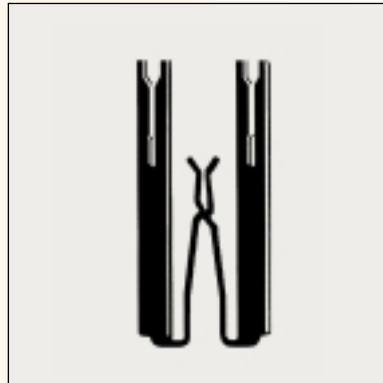

Switching Modules have two piece contacts normally open to allow connection by one of the KRONE range of 4 pole Bridging Plugs, Test Leads or Patchcords.

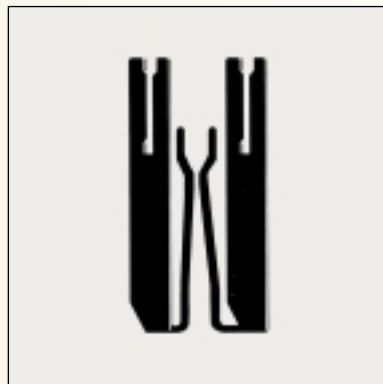


Earthing Modules have a one piece contact and earthing rail accommodating up to 2 identical wires per slot.



KRONE

DISCONNECTION MODULE

10 pair LSA-PLUS® modules which contain two piece contacts normally closed. Has advantage of individual pair disconnection and four wire test access.

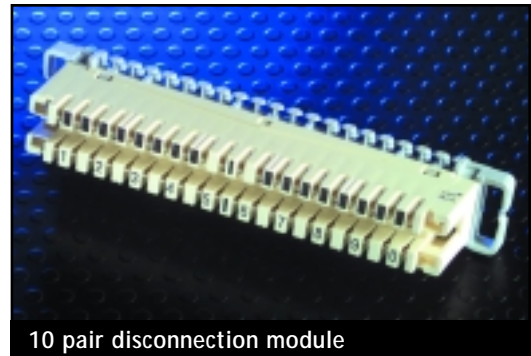


10 pair disconnection module

Dimensions are listed on page 5

| Description | Pack Qty | BT Ref: | KRONE Product No |
|---------------------------------------|----------|-----------------------|------------------|
| 10 pair disconnection contacts, cream | 10 | Strips Connexion 237A | 6089/1/810/00 |
| 10 pair disconnection contacts, green | 10 | | 6089/1/811/00 |
| 10 pair disconnection contacts, blue | 10 | | 6089/1/812/00 |

CONNECTION MODULE

10 pair LSA-PLUS® modules which contain a one piece contact providing a continuous link between wiring.

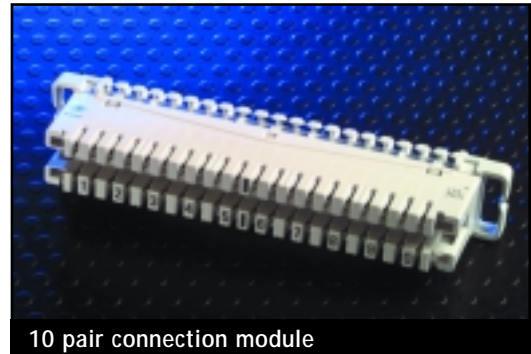


10 pair connection module

Dimensions are listed on page 5

| Description | Pack Qty | BT Ref: | KRONE Product No |
|---|----------|-----------------------|------------------|
| 10 pair connection contacts | 10 | Strips Connexion 237B | 6089/1/820/00 |
| 20 pair isolated disconnection contacts, no test access | 10 | Strips Connexion 237C | 6089/1/830/00 |

EARTH MODULE

LSA-PLUS® modules with a one piece contact and earthing rail accommodating up to 2 identical wires per slot.

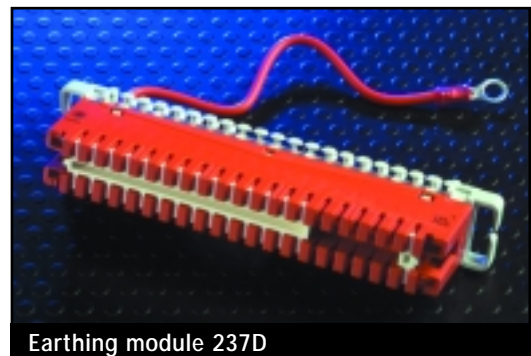

Earthing module 237D


Dimensions are listed on page 5

| Description | Pack Qty | BT Ref: | KRONE Product No |
|---|----------|-----------------------|------------------|
| 76 way, earth lead and terminal ring, red | 10 | Strips Connexion 237D | 6089/1/840/00 |
| 20 way, earth lead and terminal ring, red | 10 | Strips Connexion 237E | 6089/1/841/00 |

SWITCHING MODULE

Module remains disconnected until accessed via a patch plug or bridging plug, offers a high density data patching capability, or 20 pair connection module with tee-in access via 4 pole plug.

Dimensions are listed on page 5

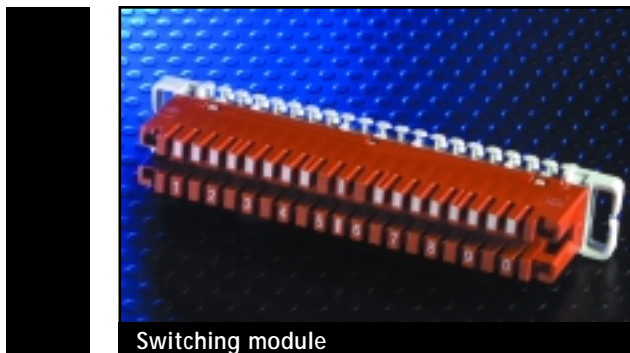


Switching module

| Description | Pack Qty | KRONE Product No |
|----------------------------------|----------|------------------|
| 10 pair, switching module, brown | 10 | 6089/1/851/00 |

ABS DISCONNECTION MODULE

Configured in six groups of three contacts for one pair and screen, provides a means of terminating cables for continuity.

Dimensions are listed on page 5

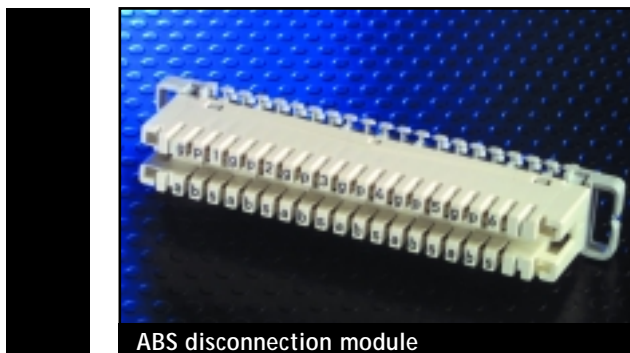

ABS disconnection module


| Description | Pack Qty | KRONE Product No |
|-----------------------------------|----------|------------------|
| 10 pair, ABS disconnection module | 10 | 6504/1/810/00 |

LOW PROFILE CONNECTION MODULE

Low profile module can be tested using 2 pole test cord.



Use 2 pole test cord (6529/1/020/01)

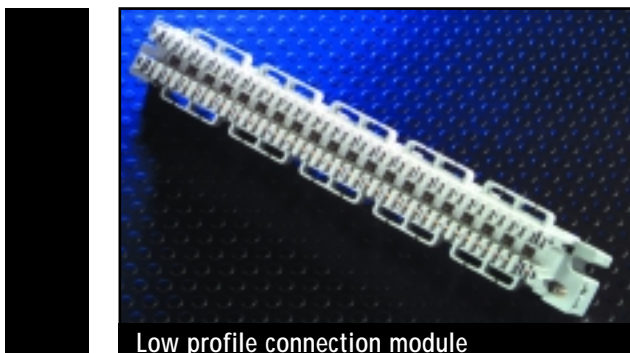

Low profile connection module

| Description | Pack Qty | BT Ref: | KRONE Product No |
|--|----------|-----------------------|------------------|
| 10 pair, connection module, centre to centre fixing dimension 96mm, two earth contacts | 10 | Strips Connexion 241A | 6196/1/001/11 |
| 10 pair, connection module, centre to centre fixing dimension 96mm | 10 | Strips Connexion 241B | 6196/1/007/11 |
| 20 pair, connection module, centre to centre fixing dimension 170mm | 10 | Strips Connexion 242A | 6196/2/002/00 |

INSERTION TOOL

Tool for LSA-PLUS® IDC termination. Inserts and crops wires simultaneously. Complete with extraction tool and stop clip.




Insertion tool


| Description | Pack Qty | BT Ref: | KRONE Product No |
|----------------|----------|------------------|------------------|
| Insertion tool | 1 | Inserter Wire 2A | 6417/1/810/02 |

10 PAIR LABEL HOLDER AND LABELS


Easy identification of terminations, for mounting on a 10 pair LSA-PLUS® module. No need to remove when using test plugs or inserting jumper wires. Labels can be ordered separately.

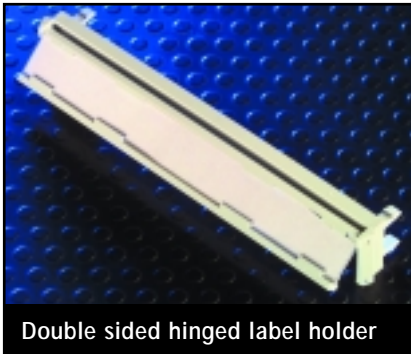

Double sided hinged label holder

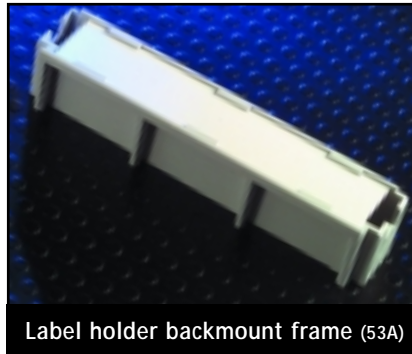



Label holder backmount frame (53A)

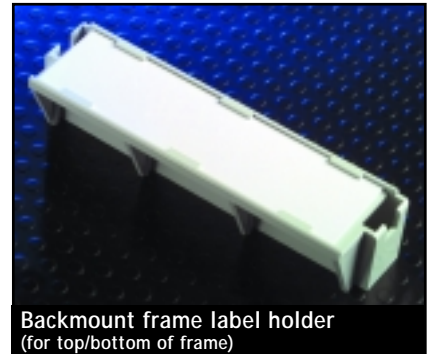

Backmount frame label holder
(for top/bottom of frame)



| Description | Pack Qty | BT Ref: | KRONE Product No |
|--|----------|------------------------|------------------|
| Double sided hinged label holder grey | 10 | Strips Designation 51A | 6092/1/810/00 |
| Double sided hinged label holder green | 10 | | 6092/1/811/00 |
| Double sided hinged label holder blue | 10 | | 6092/1/812/00 |
| Label holder complete with label, fits on one position on backmount frame | 10 | Strips Designation 53A | 6092/1/820/00 |
| Label holder complete with label, fits on one position on backmount frame. Must be positioned either at top or bottom of backmount frame | 100 | Strips Designation 54A | 6092/1/830/00 |
| Label holder for use only with 33mm pitch backmount frames | 10 | Strips Designation 56A | 6092/1/840/00 |
| Blank white labels for use with label holders 6092/1/810/00 & 6092/1/840/00 | 100 | | 6534/1/001/00 |

VOICE MODULE DIMENSIONS

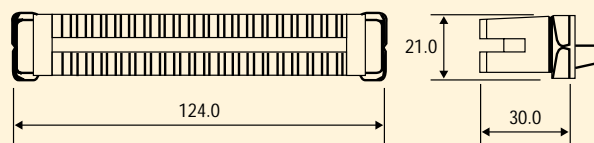
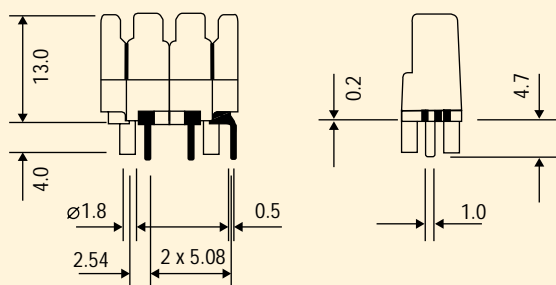


10 Pair Module



3 Way PCB
Connection Module
6048/1/001/03



2 Pair Disconnection Module
6426/1/015/00

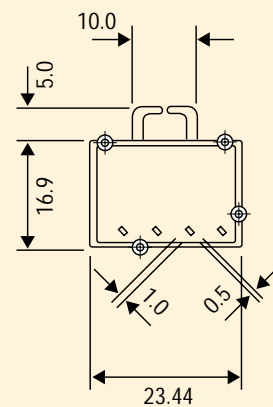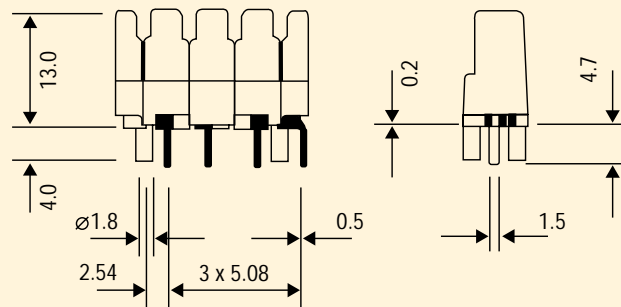

4 Way PCB
Connection Module
6048/1/001/04

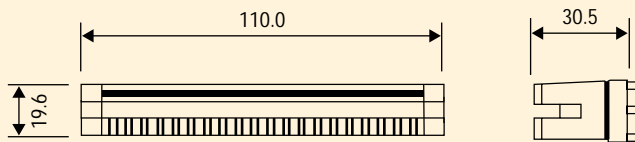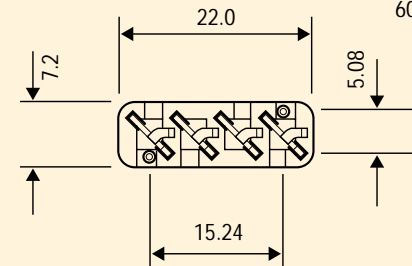

10 Pair PCB Disconnection Module

Dimensions are in millimetres unless otherwise stated.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [krone](#) manufacturer:

Other Similar products are found below :

[6530/1/017/00](#) [6429/1/076/00](#) [6048/1/001/03](#)