



### Main

Range of product	Harmony XVC4
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	5 illuminated units
Sound signalling	Without
Mounting diameter	40 mm
Component name	XVC
Device short name	XVC
Light source	Blue LED steady Clear LED steady Green LED steady Orange LED steady Red LED steady
Supply circuit type	AC/DC

### Complementary

Material	Polycarbonate (illuminated unit) ABS (acrylonitrile butadiene-styrene) (base unit) PBT + ABS (UL94HB) (top cover)
Product mounting	On base
Mounting location	On base
[Us] rated supply voltage	24 V
[Us] rated supply voltage	24 V
Cable cross section	0.33 mm <sup>2</sup>
AWG gauge	AWG 22
Cable length	500 mm
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	125 mA
Flashing frequency	1 Hz
Product weight	0.18 kg

Height	240.5 mm
--------	----------

## Environment

Standards	EN/IEC 61000-6-3 EN/IEC 61000-6-2
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
Overvoltage category	Class II EN/IEC 61140
Class of protection against electric shock	Class II conforming to EN/IEC 61140
IP degree of protection	IP54 in flat surface installation conforming to EN/IEC 60529

## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0808 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference contains SVHC above the threshold - Go to CaP for more details <a href="#">Go to CaP for more details</a>
Product environmental profile	Available <a href="#">Product environmental</a>
Product end of life instructions	Need no specific recycling operations


## Contractual warranty

Warranty period	18 months
-----------------	-----------

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

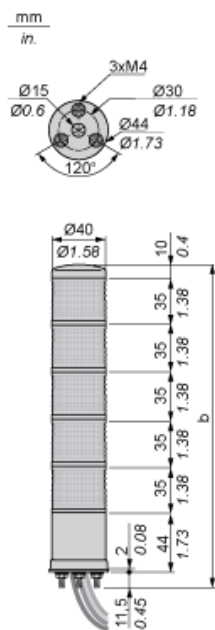

No. of illuminated units	b Without buzzer (mm)	b Without buzzer (in)
1 stage	100.50	3.96
2 stages	135.50	5.33
3 stages	170.50	6.71
4 stages	205.50	8.09
5 stages	240.50	9.47


---

Pre-assembled and Pre-wired Tower Light

---

Direct Mounting on Horizontal Support

Panel cut-out



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Lighting Fixtures](#) category:*

*Click to view products by [Schneider](#) manufacturer:*

Other Similar products are found below :

[1301080067](#) [XVEC21P](#) [XVEC2B7](#) [113163000-00662717](#) [113472000-00691461](#) [LD6A-3DQB-RYG](#) [LD6A-3DZQB-RYG](#) [LF1B-NA3P-2THWW2-3M](#) [LF1B-NC3P-2THWW2-3M](#) [LF1B-ND3P-2THWW2-3M](#) [E35600](#) [NB-RLAMP01-LED](#) [FLK7LED](#) [LD6A-3WQB-RYG](#) [XVC4B3K](#) [XVBC4M7](#) [2702482](#) [2702935](#) [ZWF-638-24CW](#) [ZAF-486-24CW](#) [BC5000-N-S](#) [BP3200-C-S-24](#) [BP3200-C-F-12](#) [BP3100-C-S](#) [BC5000-C-S](#) [2403122](#) [2403121](#) [2402991](#) [113261000-00641180](#) [113259000-00641174](#) [190007019-00014904](#) [226108019-00610754](#) [4823](#) [4824](#) [4866](#) [4868](#) [E35611](#) [11212573001-00514271](#) [112887037-00076065](#) [113021000-00564565](#) [113473000-00704968](#) [NB-RLAMP01](#) [E35500](#) [408001403-00671626](#) [LD6A-3WZQB-RYG](#) [LF1B-NA4P-2THWW2-3M](#) [LF1B-NB3P-2THWW2-3M](#) [LF1D-C2F-2W-330](#) [LF1B-ND4P-2THWW2-3M](#) [LF1B-NF3P-2THWW2-3M](#)