


Lead Lengths 40mm +5/-0mm

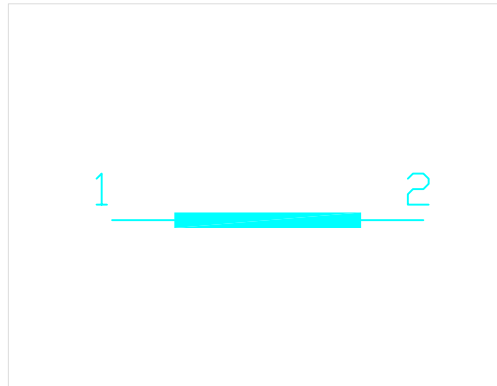

TOR

PART No	T106-26A	AL 67
SIZE (OD/ID/Ht)	26.9/14.5/7.92	
COATING	NA	
MATERIAL	IRON POWDER	
K VALUE	NA	

Cu Wire


PART No	COP224	WEIGHT (g)
SIZE (Dia)	0.56mm	
COATING	SOL 2	
COAT MATERIAL	NA	

Winding

No Turns	189
No Layers	CONTINUOUS
No Strands	ONE
Direction	AS PER SKETCH

TEST	Nom	Tolerance	Min	Max
Inductance (mH)	2.4	+20/-20%	1.9	2.9
Res (Ohm)	0.4	+15/-15%	0.34	0.46
Hi Pot (V AC)	N/A			

ALL DIMENSIONS IN MM / ANGLES IN DECIMAL DEGREES



ROXBURGH ELECTRONICS LTD

TITLE ASSEMBLY FOR SF1123

DrgNo SF1123-CHK

ISSUE 2

PROCUREMENT SPECIFICATION FOR SF1123-CHK

CUSTOMER REFERENCE

Sheet 1 of 1 | Aprvd Date 30/06/00 | Aprvd By SW | Drwn by BFS | SCALE NTS | CNN--- | Location N: \DWG\PS\CHK\CHK00098

© ROXBURGH ELECTRONICS LTD, FOXHILLS INDUSTRIAL PARK, SCUNTHORPE, NORTH LINCOLNSHIRE, DN15 8QJ TEL +44 1724 281770 F +44 1724 270230

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [roxburgh](#) manufacturer:

Other Similar products are found below :

[RES20F06](#) [RES90F10](#) [RIS0622H2](#) [KMF3100](#) [XE12001](#) [SF1121](#) [RES5-FO8](#) [DRF10](#) [CMV10](#) [DVS24](#) [C225](#) [RES20F16](#) [DRF06](#) [RES20F10](#)
[XEB01010](#) [RES5-F15](#) [DRF08](#) [C215](#) [RES10F06](#) [RES30F03](#) [XE0475](#) [SF1123](#) [RID-0342-H](#) [RES5-F10](#) [RIR-0622-H](#) [XE01010](#) [SMV20](#)
[RIR-0222-H](#) [SF1122](#) [SMV40](#) [RIQ-0442-H2](#) [RX730RC+CLIP](#) [SMV10](#) [3CRH30330](#) [CMV20](#) [XE1201](#) [RE1201](#)