


Lead Lengths 40mm +5/-0mm

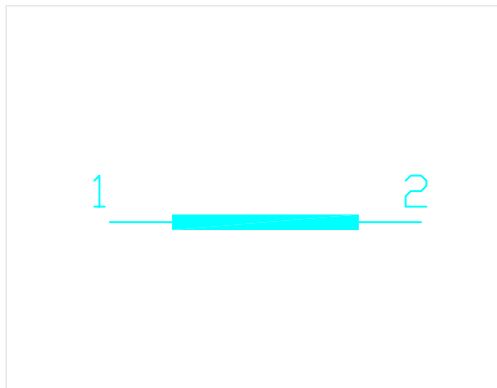

### TOR

PART No	T80-26	AL 46
SIZE (OD/ID/Ht)	20.2/12.6/6.35	
COATING	NA	
MATERIAL	IRON POWDER	
K VALUE	NA	

### Cu Wire


PART No	COP229	WEIGHT (g) 9
SIZE (Dia)	0.4	
COATING	SOL 2	
COAT MATERIAL	NA	

### Winding

No Turns	295		
No Layers	CONTINUOUS		
No Strands	ONE		
Direction	AS PER SKETCH		

TEST	Nom	Tolerance	Min	Max
Inductance (mH)	4.0	+20/-20%	3.2	4.8
Res (Ohm)	0.9	+15/-15%	0.765	1.035
Hi Pot (V AC)	NA			

ALL DIMENSIONS IN MM / ANGLES IN DECIMAL DEGREES



ROXBURGH ELECTRONICS LTD

TITLE ASSEMBLY FOR SF1121

DrgNo SF1121-CHK

ISSUE 2

PROCUREMENT SPECIFICATION FOR SF1121-CHK

CUSTOMER REFERENCE

Sheet 1 of 1 | Aprvd Date 15/08/00 | Aprvd By JRT | Drwn by SW | SCALE NTS | CNN--- | Location N: \DWG\PS\CHK\CHK00096

© ROXBURGH ELECTRONICS LTD, FOXHILLS INDUSTRIAL PARK, SCUNTHORPE, NORTH LINCOLNSHIRE, DN15 8QJ TEL +44 1724 281770 F +44 1724 270230

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [roxburgh](#) manufacturer:*

Other Similar products are found below :

[RES20F06](#) [RES90F10](#) [RIS0622H2](#) [KMF3100](#) [XE12001](#) [SF1121](#) [RES5-FO8](#) [DRF10](#) [CMV10](#) [DVS24](#) [C225](#) [RES20F16](#) [DRF06](#) [RES20F10](#)  
[XEB01010](#) [RES5-F15](#) [DRF08](#) [C215](#) [RES10F06](#) [RES30F03](#) [XE0475](#) [SF1123](#) [RID-0342-H](#) [RES5-F10](#) [RIR-0622-H](#) [XE01010](#) [SMV20](#)  
[RIR-0222-H](#) [SF1122](#) [SMV40](#) [RIQ-0442-H2](#) [RX730RC+CLIP](#) [SMV10](#) [3CRH30330](#) [CMV20](#) [XE1201](#) [RE1201](#)