


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
AD	00						
	N2	REVISED PER ECO-11-004587	11MAR11	RK	HMR		

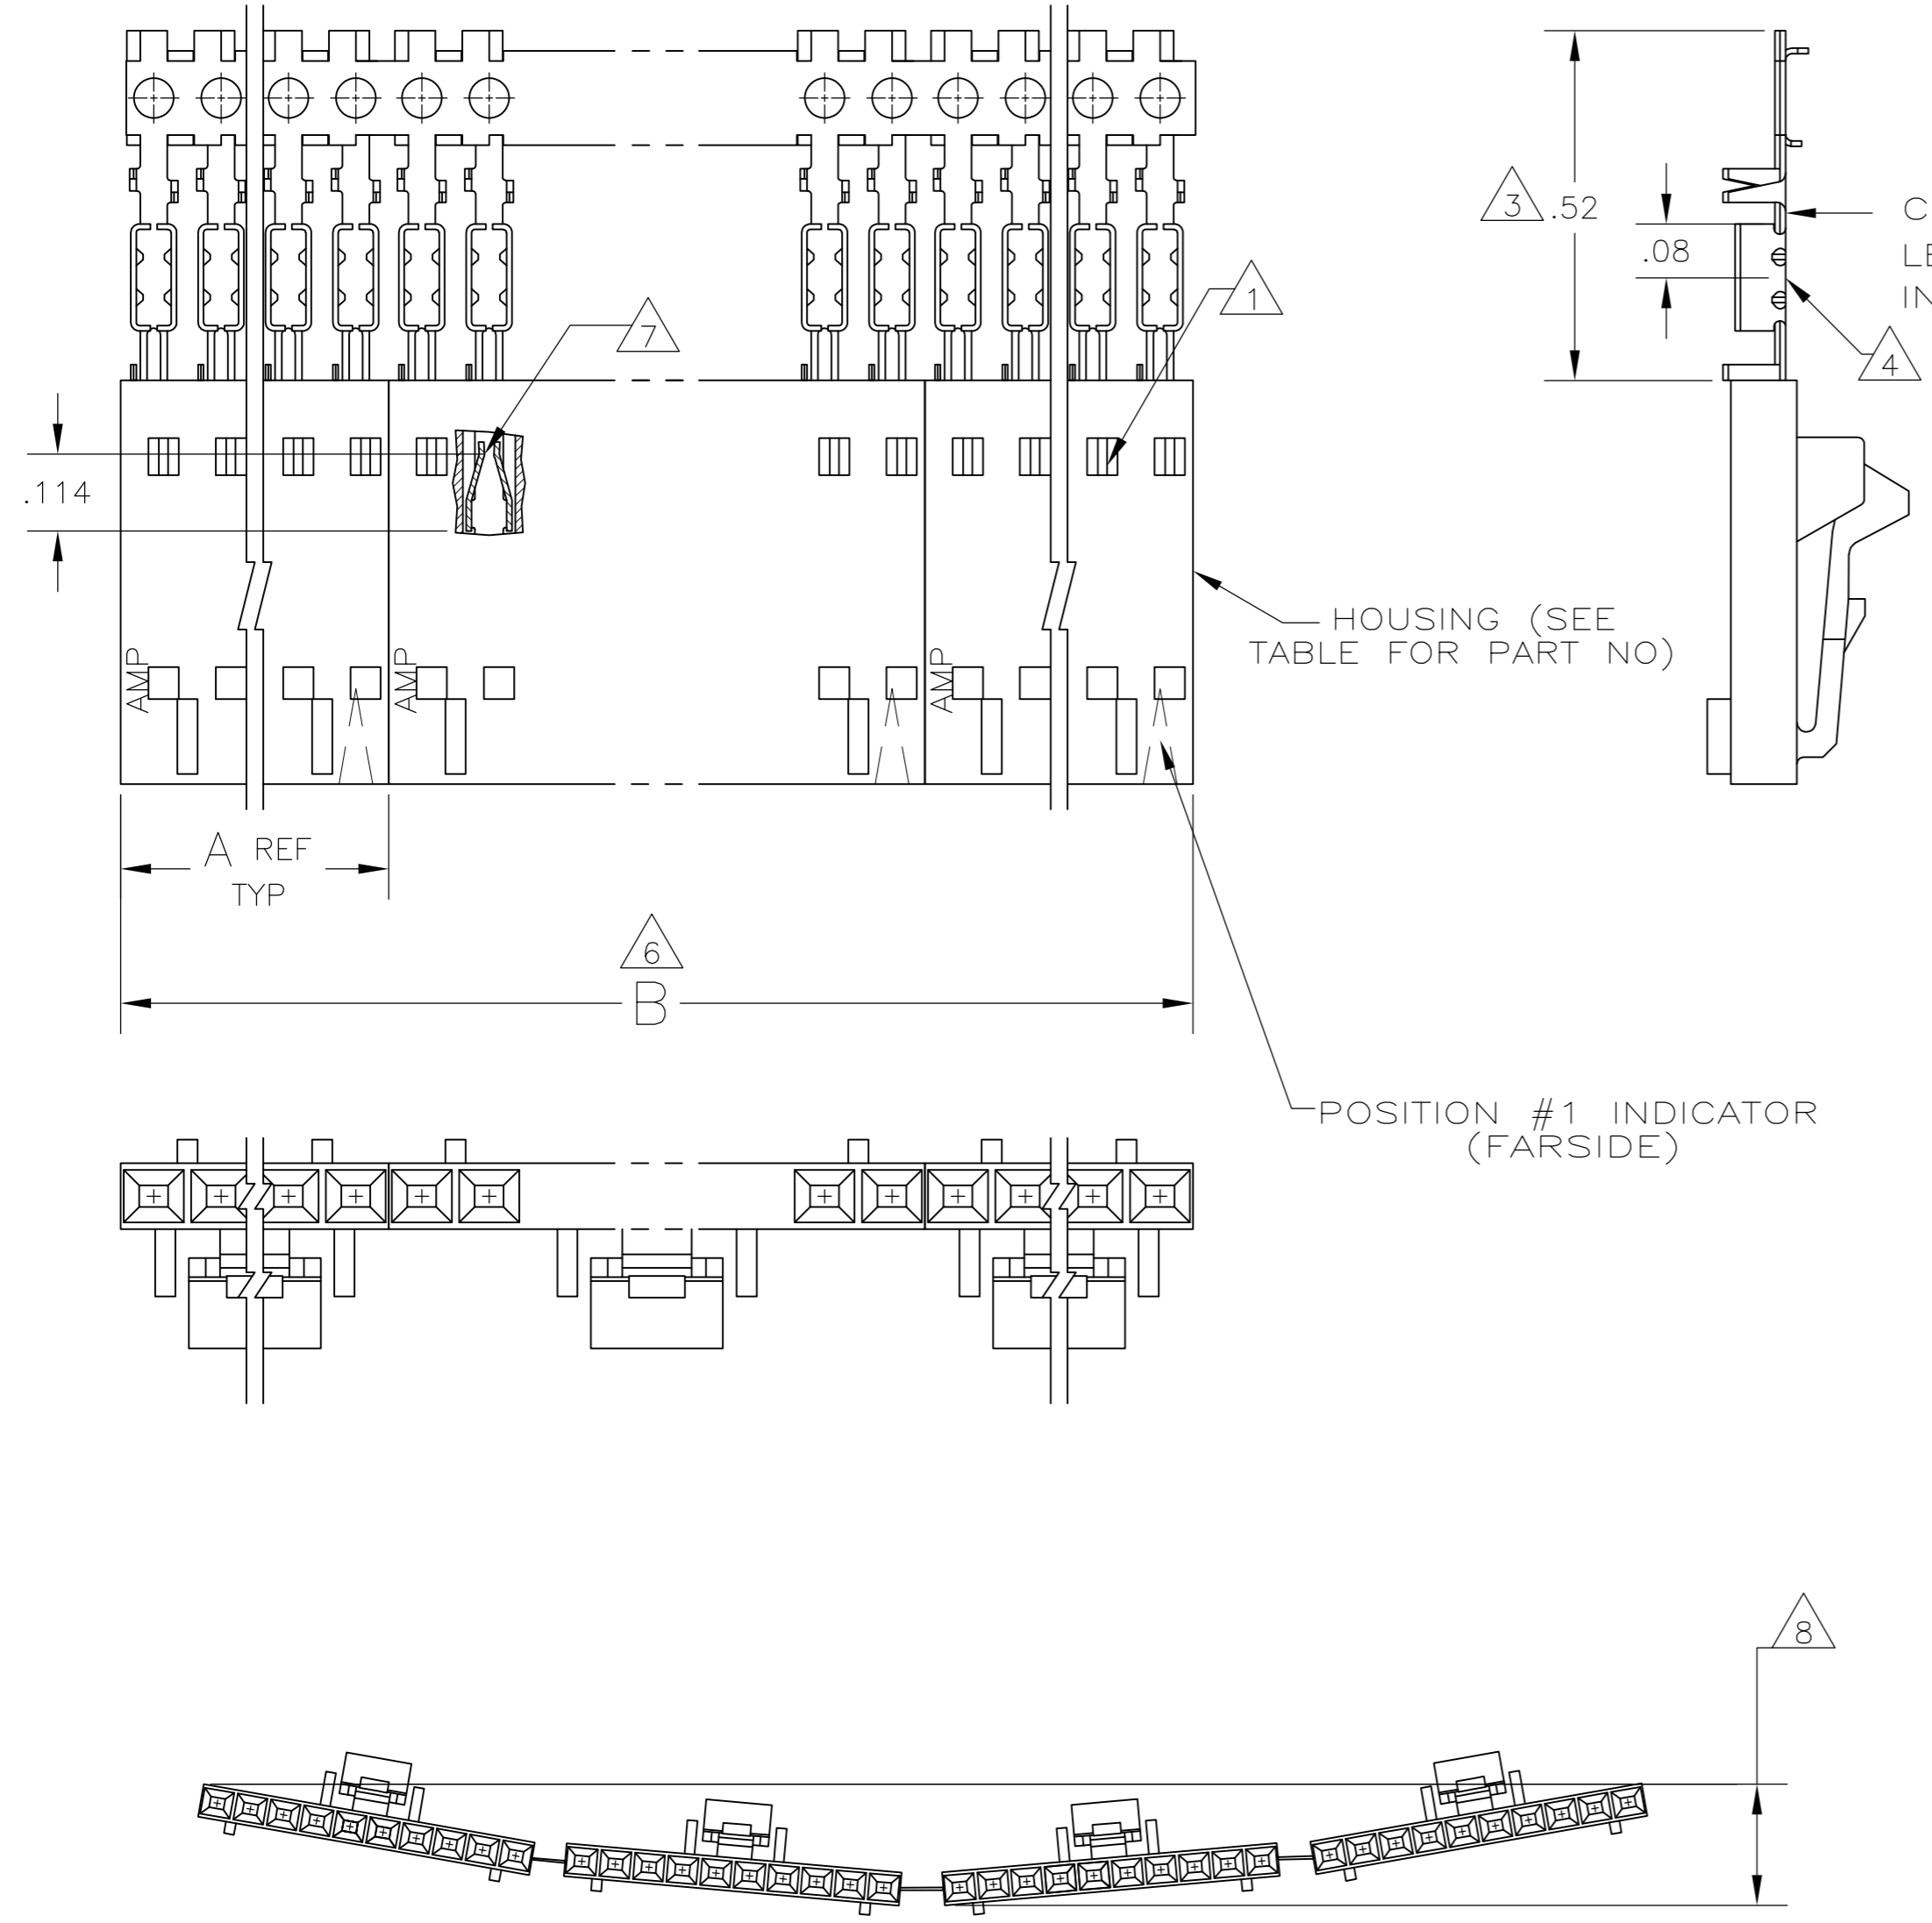

CONTACT IDENTIFICATION LETTER "B" (LOCATED IN THIS AREA)

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103644
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 .000015 GOLD IN THE CONTACT AREA. .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA. ALL OVER .000050 NICKEL.
- 10 .000015 GOLD IN THE CONTACT AREA. .000050-.000100 BRIGHT TIN ON THE TERMINATION AREA. ALL OVER .000050 NICKEL.
- 11 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 12 .000015 GOLD IN THE CONTACT AREA. .000050-.000100 MATTE TIN ON THE TERMINATION AREA. ALL OVER .000050 NICKEL.
- 13 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

EXAMPLE: STRIP ASSEMBLY  
SCALE 2:1



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	L A MAYER	11-4-86	<b>STE</b> TE Connectivity																					
DIMENSIONS: INCHES		CHK	P de Jong	11-12-86																						
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	P de Jong	11-12-86																						
<table border="0"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>.02</td></tr> <tr><td>3 PLC</td><td>±</td><td>.005</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> <tr><td>FINISH</td><td></td><td></td></tr> </table>		0 PLC	±	-		1 PLC	±	-	2 PLC	±	.02	3 PLC	±	.005	4 PLC	±	-	ANGLES	±	-	FINISH			PRODUCT SPEC	108-25034	NAME
0 PLC	±	-																								
1 PLC	±	-																								
2 PLC	±	.02																								
3 PLC	±	.005																								
4 PLC	±	-																								
ANGLES	±	-																								
FINISH																										
MATERIAL	HOUSING: SEE TABLE	APPLICATION SPEC	114-25026	SIZE	A2																					
		WEIGHT	-	CAGE CODE	00779																					
		CUSTOMER DRAWING		DRAWING NO	C=103957																					
		SCALE	4:1	SHEET	1 of 2																					
		REV	N2																							

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

OBSOLETE	△12	2	2.40	1.198	1-104257-1	12	6-103957-1	
	△12	2	2.20	1.098	1-104257-0	11	6-103957-0	
	△12	2	2.00	.998	104257-9	10	5-103957-9	
	△12	2	1.80	.898	104257-8	9	5-103957-8	
	△12	2	1.60	.798	104257-7	8	5-103957-7	
	△12	2	1.40	.698	104257-6	7	5-103957-6	
	△12	4	2.39	.598	104257-5	6	5-103957-5	
	△12	4	1.99	.498	104257-4	5	5-103957-4	
	△12	5	1.99	.398	104257-3	4	5-103957-3	
	△12	8	2.40	.298	104257-2	3	5-103957-2	
	△12	10	2.00	.198	104257-1	2	5-103957-1	
	△10	2	1.40	.698	104257-6	7	2-103957-0	
	△11	△10	2	2.40	1.198	1-104257-1	12	1-103957-9
	△11	△10	2	2.00	.998	104257-9	10	1-103957-8
		△10	2	1.60	.798	104257-7	8	1-103957-7
		△10	4	2.39	.598	104257-5	6	1-103957-6
		△10	4	1.99	.498	104257-4	5	1-103957-5
		△10	5	1.99	.398	104257-3	4	1-103957-4
		△10	8	2.40	.298	104257-2	3	1-103957-3
		△10	10	2.00	.198	104257-1	2	1-103957-2
	△9	2	2.40	1.198	1-104257-1	12	1-103957-1	
	△9	2	2.20	1.098	1-104257-0	11	1-103957-0	
	△9	2	2.00	.998	104257-9	10	103957-9	
	△9	2	1.80	.898	104257-8	9	103957-8	
	△9	2	1.60	.798	104257-7	8	103957-7	
	△9	2	1.40	.698	104257-6	7	103957-6	
	△9	4	2.39	.598	104257-5	6	103957-5	
	△9	4	1.99	.498	104257-4	5	103957-4	
	△9	5	1.99	.398	104257-3	4	103957-3	
	△9	8	2.40	.298	104257-2	3	103957-2	
	△9	10	2.00	.198	104257-1	2	103957-1	
PLATING	△6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .005 4 PLC ± - ANGLES ± -	DWN L A MAYER 11-4-86 CHK P de Jong 11-12-86 APVD P de Jong 11-12-86	 TE Connectivity	
	FINISH SEE TABLE	PRODUCT SPEC 108-25034 APPLICATION SPEC 114-25026	NAME RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L, LATCHED & POLARIZED FOR #22-#25 AWG WIRE SIZE, STRIP FORM	
MATERIAL -		WEIGHT -	SIZE A2 CAGE CODE 00779 DRAWING NO C=103957	RESTRICTED TO -
		CUSTOMER DRAWING	SCALE 1:1	SHEET 2 OF 2 REV N2

103957

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for te connectivity manufacturer:*

Other Similar products are found below :

[570416-000](#) [CLTEQ-M81CE-SSRELAY-4-20V](#) [D38999/24FJ4AN](#) [358838-000](#) [4-1195131-0](#) [650069-000](#) [SMD100-2](#) [CB-1022B-78](#)  
[RM707012](#) [RP410012](#) [MMS42](#) [1-640426-8](#) [2EDL4CM](#) [DTS20W19-11PD-3028-LC](#) [RM202615](#) [NC6-P104-06](#) [MSPS103B](#) [DTS26F21-41AE](#) [DTS26F21-41PE-LC](#) [DTS26F21-11SE-3028-LC](#) [1932144-1](#) [293545-4](#) [LVR125S](#) [MS27466T25F4PB](#) [CKB-38-78010](#)  
[1206SFF150F/63-2](#) [D38999/20JB35HA](#) [D38999/24WJ20PA](#) [1754138-1](#) [TE1500A2R2J](#) [DTS24F25-29PC-3028-LC](#) [D38999/24WG11HA](#)  
[D38999/24WG11HN](#) [MS27467T21F11H](#) [DJT16E21-11HA](#) [1206SFH150F/24-2](#) [DTS24F19-11SC-3028-LC](#) [DTS24F21-41HN-LC](#)  
[DTS24F21-41AN](#) [DTS24F21-41PN-LC](#) [RP330024](#) [MS27467T21F35J](#) [MS27467T21F11J](#) [MS27467T21F16H-LC](#) [MS27467T21F35H](#)  
[MS27467T21F41H-LC](#) [DJT16E21-11PA-LC](#) [DJT16E21-11HA-LC](#) [DJT16E21-11AA](#) [MS27467T21B11JA](#)